


Joint 30x30 lockable





- For adjustable or rigid profile connections
- For high loads up to 45 Nm in the swivel direction
- Positive interlocking thanks to Hirth toothed coupling
- Swivel range 180°
- Easy adjustment in the 7,5° modular dimensions

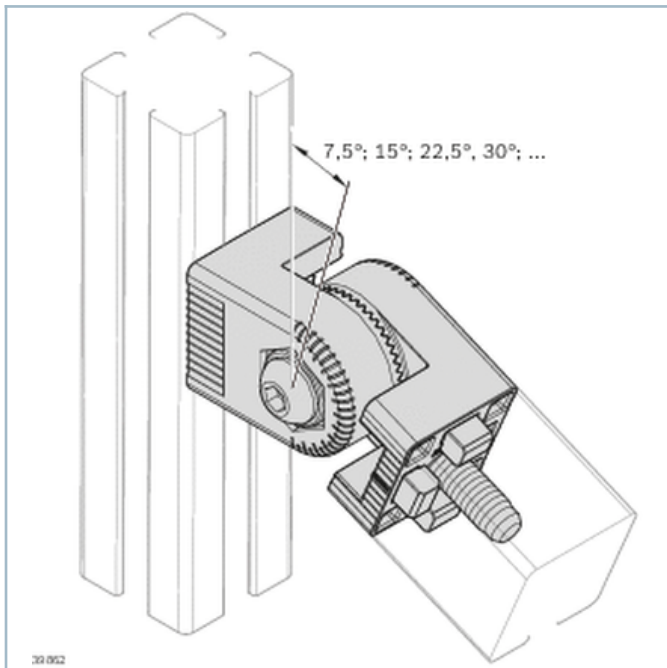

HowTo Video



- Marking with a 7,5° graduation for easy detection of the adjustment angle
- Clamping and convenient adjustment of joint using a clamping lever or screw
- Profile finishing: Not required (self-cutting screw for end face to end face connection)
- Compatible with joint 30x30

Technical data

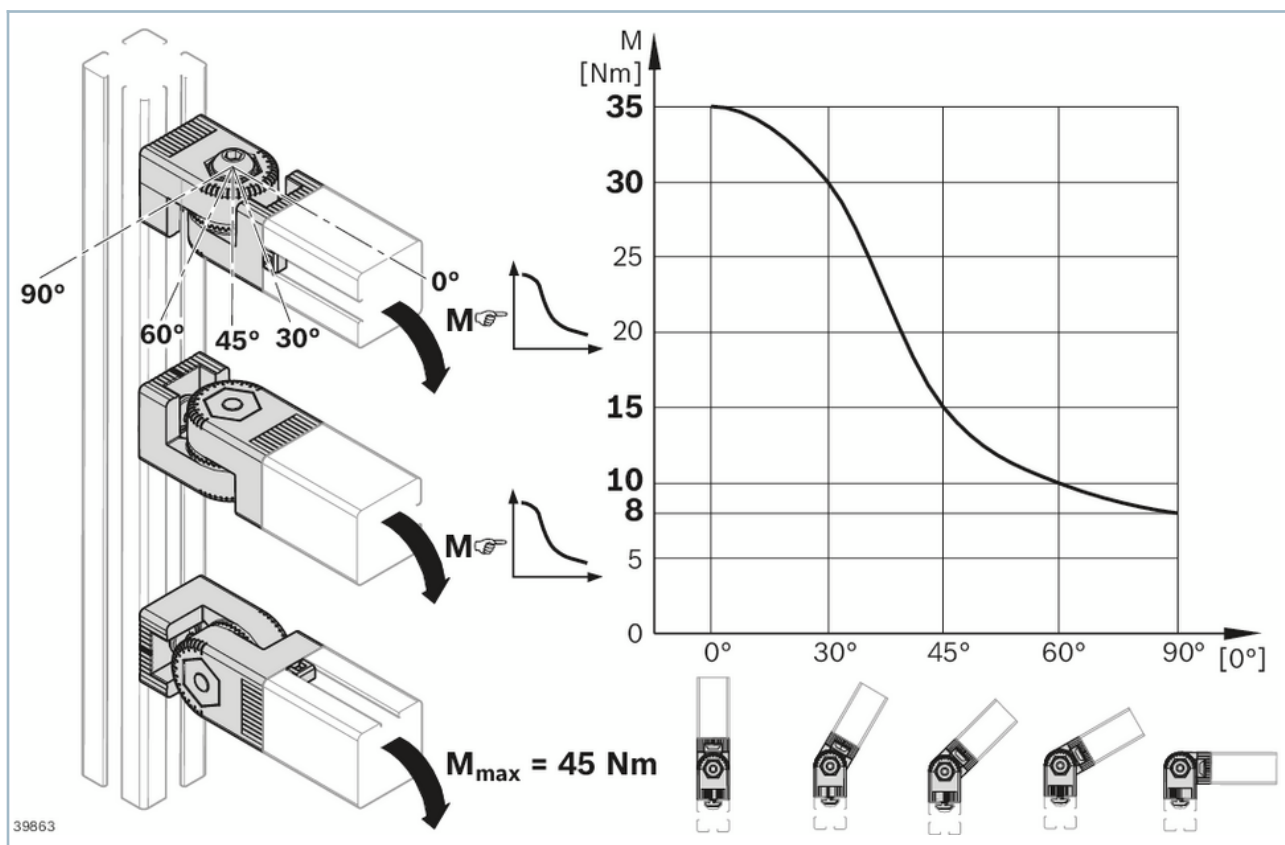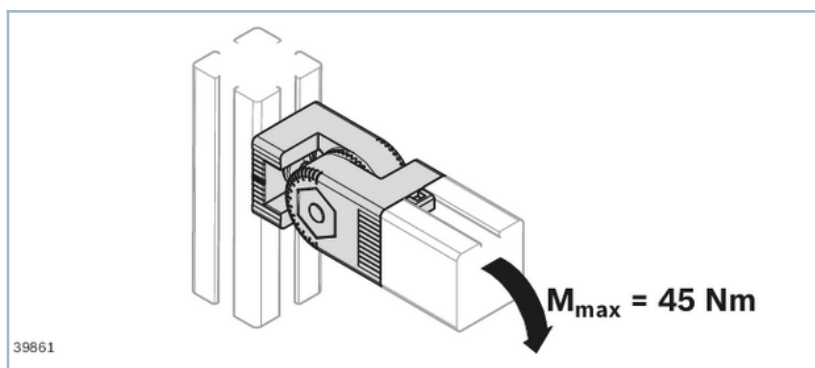


No.	Material
3842562086	diecast zinc Fastening material: Steel; zinc-plated
3842564090	Clamping lever: diecast zinc; black plastic coated Steel parts: galvanized, strength class 5.8

Dimensions

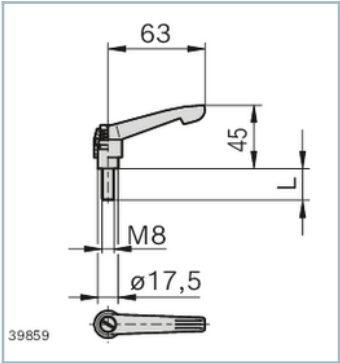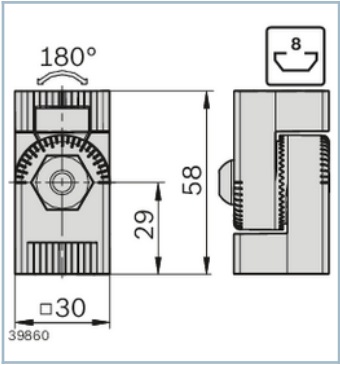

Delivery notes

Fastening material (FS)

3842562086	2x	 S8x25-T40	2x	 M6x12 
3842564090				

Scope of delivery

Joint 30x30 lockable	Incl. fastening material	6x centering piece PA6
Clamping lever M8 L30		

Ordering codes

	Groove	L	ESD	FS	No.
		mm			
Joint 30x30 lockable	8			2xFS1, 2xFS2	3842562086
Clamping lever M8 L30		30			3842564090