



Lifting wheel

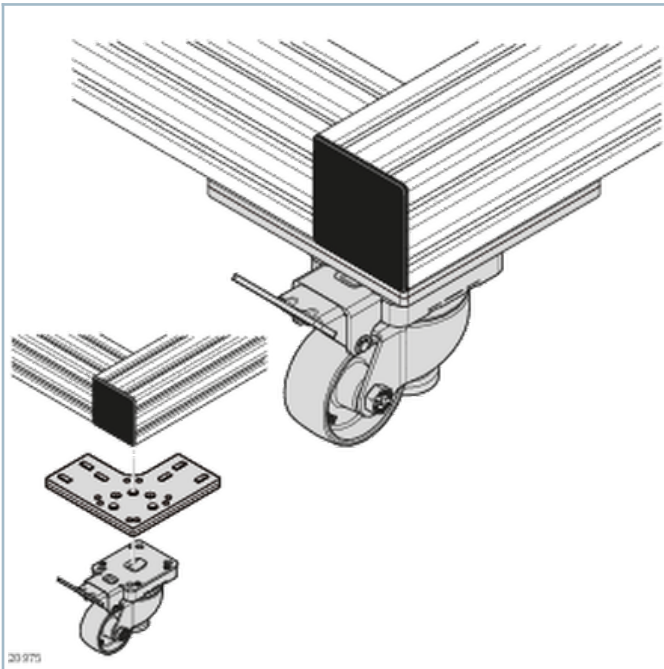


- Steerable lifting wheel
- The wheel turns into a stable base simply by engaging the stop lever
- Screw-on plate for mounting the lifting wheel
- With 'Ideal-Stop': locking lever does not swivel with the steerable caster but remains in the defined position. The locking lever is fixed in position on the frame by means of the screw-on plate, and the caster wheel moves freely

Dimensions

Lifting wheel

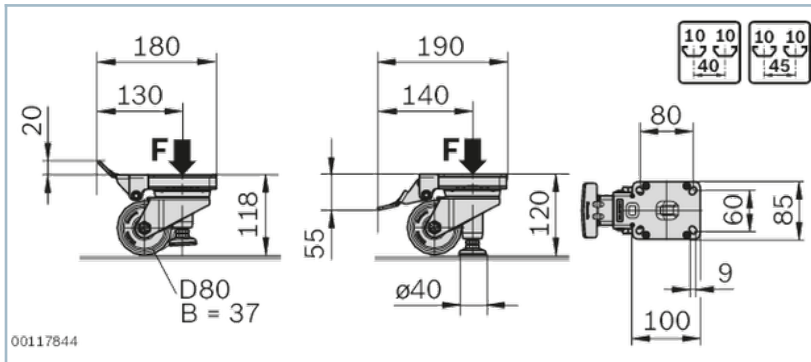

Screw-on plate, lifting wheel

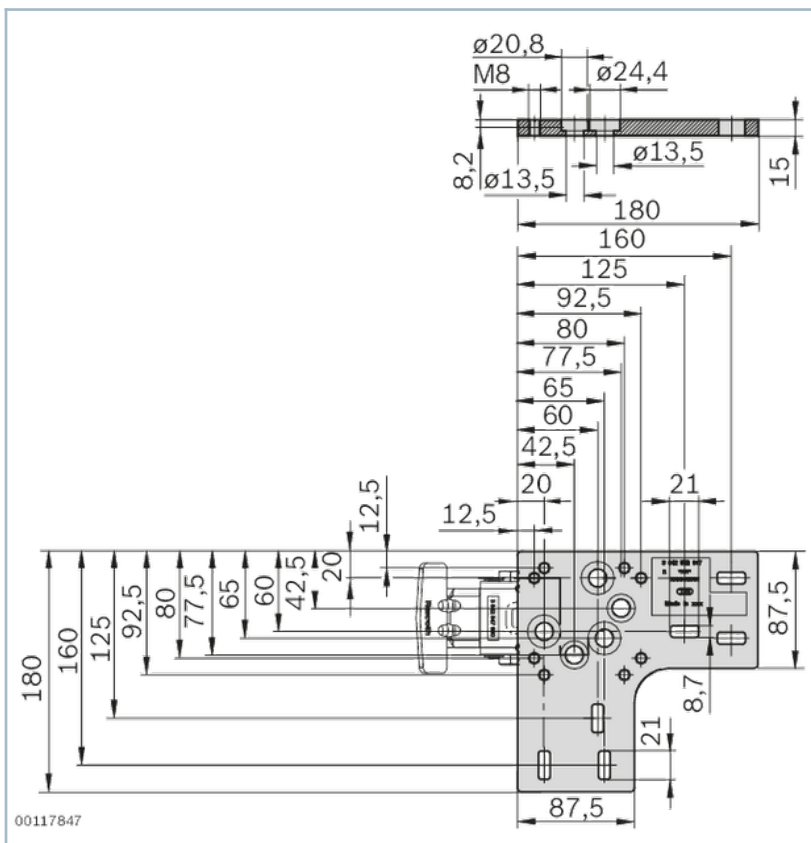

Accessories

Required accessories

M8x35 screw (ISO 4762), 8 washer (DIN EN 7090), lock washer 8 FSt for fastening to the screw-on plate

M8x30 T-bolt, M8 flange nut, M12 or S12 central bolt for fastening the screw-on plate to the profile frame

Ordering codes

	F		No.
	N		
Lifting wheel, F2300	2300		3842547890
Screw-on plate, lifting wheel		4	3842553967