


Conveyor track with stop plate




- Stop plates suitable for the manual linking of workstations
- For supplying materials to workstations and in flow rack systems

- For the manual linking of workstations
- Aluminum U-profile conveyor track
- Full-width rollers available in plastic, steel or stainless steel
- Recommended conveyor track width:
 $BF = \text{container width } b + 5 \text{ mm}$
- Save money by choosing the larger roller distance R
- Available as ESD-conductive version


Ordering codes

BG=1

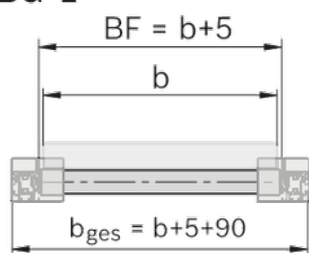


00139089


BG=0

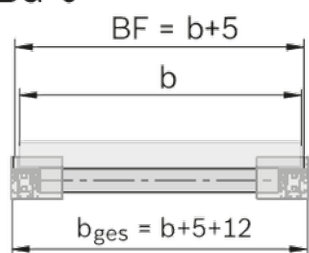


00139035

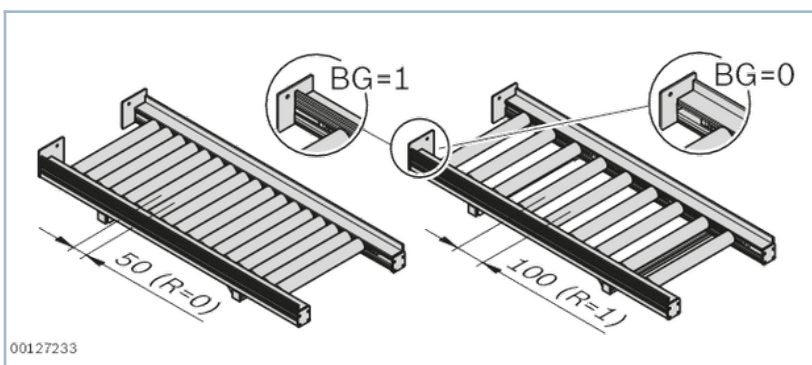

00127233

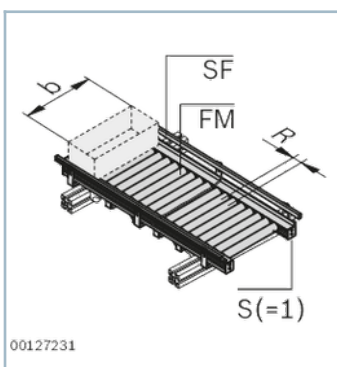

00127231

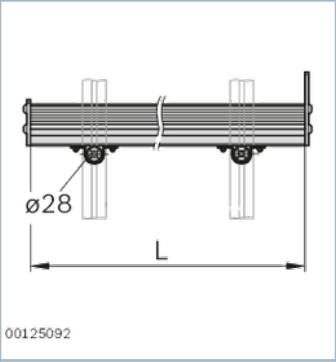

Order Parameter

		3842998278
A	Design	Disassembled, assembled
ESD	Conductivity	yes, no
L	Conveyor track length	355 ... 6000 mm
R	Roller distance	50, 100 mm
BG	Slide rail border	inside, outside
BF	Flow rack system width	200 ... 1000 mm
FM	Conveyor medium	Rollers in plastic, steel, stainless steel
S	Stop plate design	With stop, without stop
SF	Lateral guides	with; without

TM_{max} = 3000 mm if A = mounted

	No.
Conveyor track EcoFlow with stop plate	3842998278