


Drive head LF20C

- Drive head for transferring drive torque to a toothed belt
- For direct mounting of a motor or (in conjunction with a center shaft) for mounting a hollow shaft gear or a coupling
- Mounted directly on profile by using longitudinal end connector (connector included in scope of delivery)
- Profile finishing: LF blind hole drilling for longitudinal end connector

Dimensions

Drive head LF20C

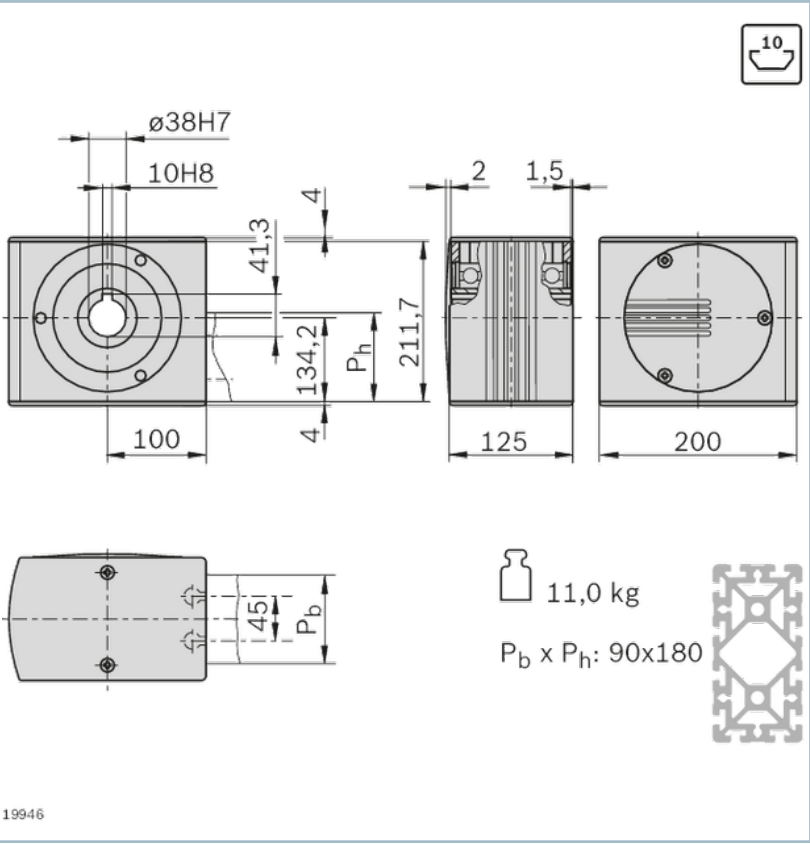

Delivery notes

FS5	FS6	FS7	FS8	FS9
 DIN 7984 M12x40	 DIN 7984 M8x30  DIN 125 A8,4 	 DIN 7991 M8x30 	 ø18x7	 ø10xø5x11
FS2		FS3		
 ISO 7380 M8x40     		 ISO 4035 M8-04    		

Ordering codes

	FS	No.
Drive head LF20C	4xFS2, 2xFS3	3842526867