



Roller, clean room



- Suitable for use in clean rooms. Conductive material version in accordance with DIN EN 61340-5-1; conduction resistance 10^3 up to $10^8 \Omega$
- Suitable for ESD-sensitive areas. Conductive material version in accordance with DIN EN 61340-5-1; conduction resistance $\leq 10^6 \Omega$

- Versatile range of uses
- Wheels with excellent running properties
- Available as a caster wheel with lock, caster, and trestle wheel
- All wheels mounted in the profile slot or central hole (accessories required)
- Profile finishing: thread cutting M12 in the case of assembly in central hole
- LR with lock: lock prevents the wheel from rolling or turning

Product description

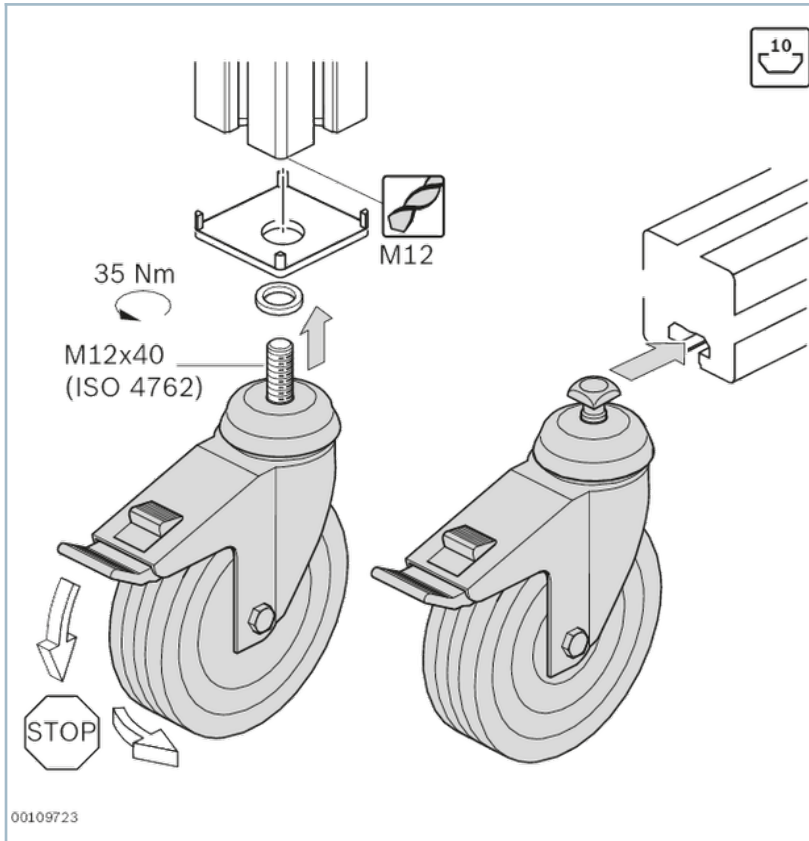


[Wheel selection guide](#)

Technical data


No.		3842562055	3842562056
Material		Gray PU, housing: steel, chrome-plated	

Dimensions


D125 LR with lock

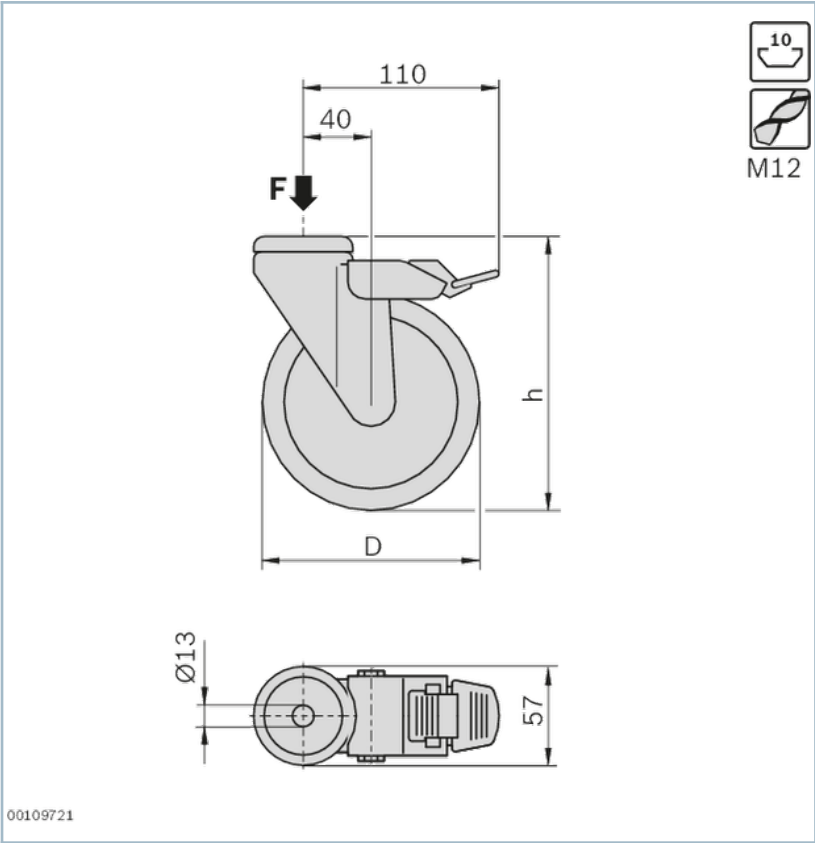


D125 LR

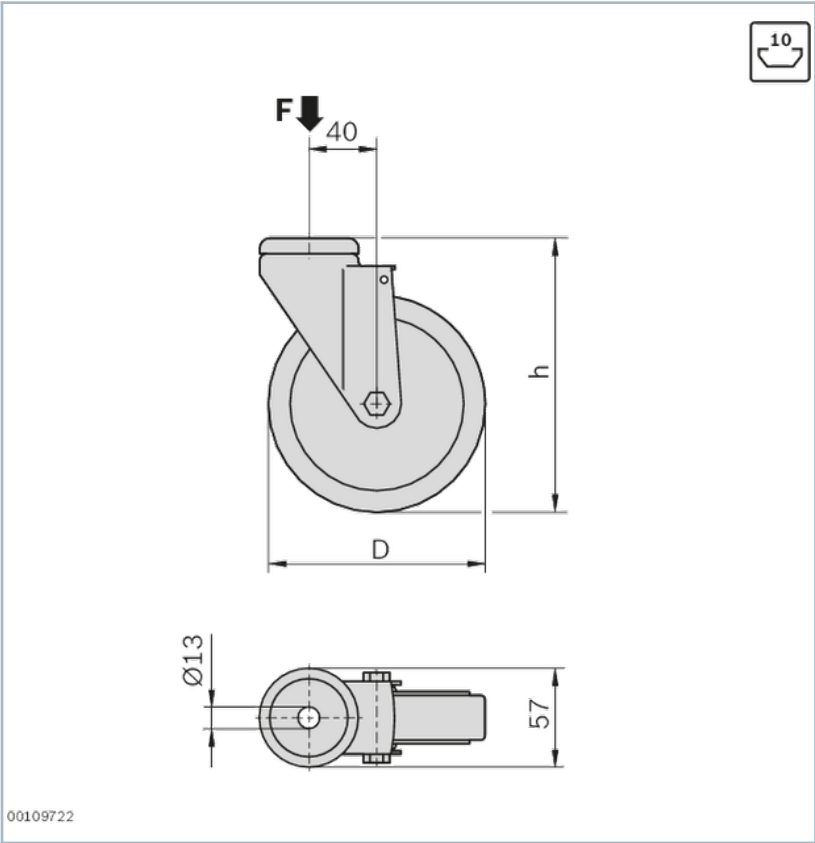

Castor wheel with lock

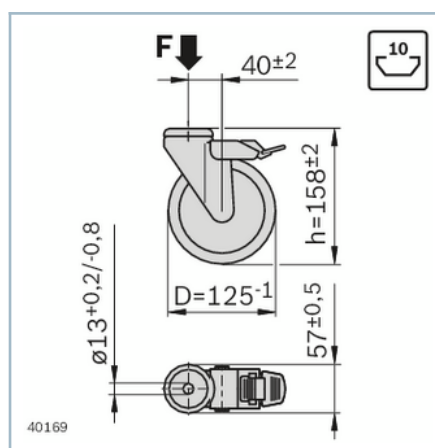

LR

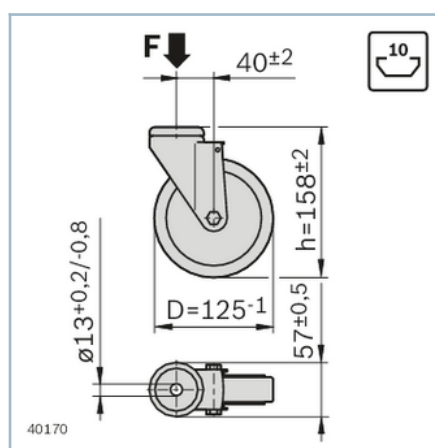

Accessories



Bearing ring

- For cover caps with hole in the sizes 40x40, 45x45, 50x50 and 60x60
- For M12 threads
- To protect the caps when tightening accessories

Delivery notes

Fastening material (FS)

3842562055	1x	 M12X30  DIN 985 M12
3842562056	1x	 M12X30  DIN 985 M12

Ordering codes

	F	D	h	ESD	FS	No.
	N	mm	mm			
Castor wheel D125 F ESD Path	1000	125	158		FS1	3842562055
Castor wheel D125 ESD Path	1000	125	158		FS1	3842562056