


Passive bridge connection kit

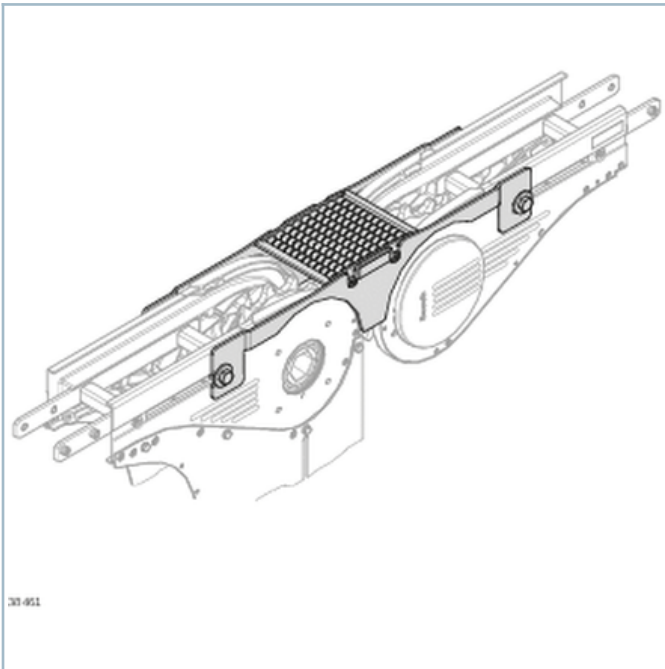

- The passive bridge is used as a transfer unit between the basic unit and return unit or with the connection drive to bridge the conveyor trench

- Size: 65-160
- Only for flat conveyor chain and static friction chain
- For dimensionally stable products with an even transport surface
- Height adjustment: Approx. 2 mm
- The conveyed goods are transferred via passive rollers
- Suitable for goods from approx. 300 mm length
- Can be retrofitted into a standard configuration at any time


Technical data

Material


Non-rusting steel 1.4301, POM

Dimensions

Connection kit passive bridge STS

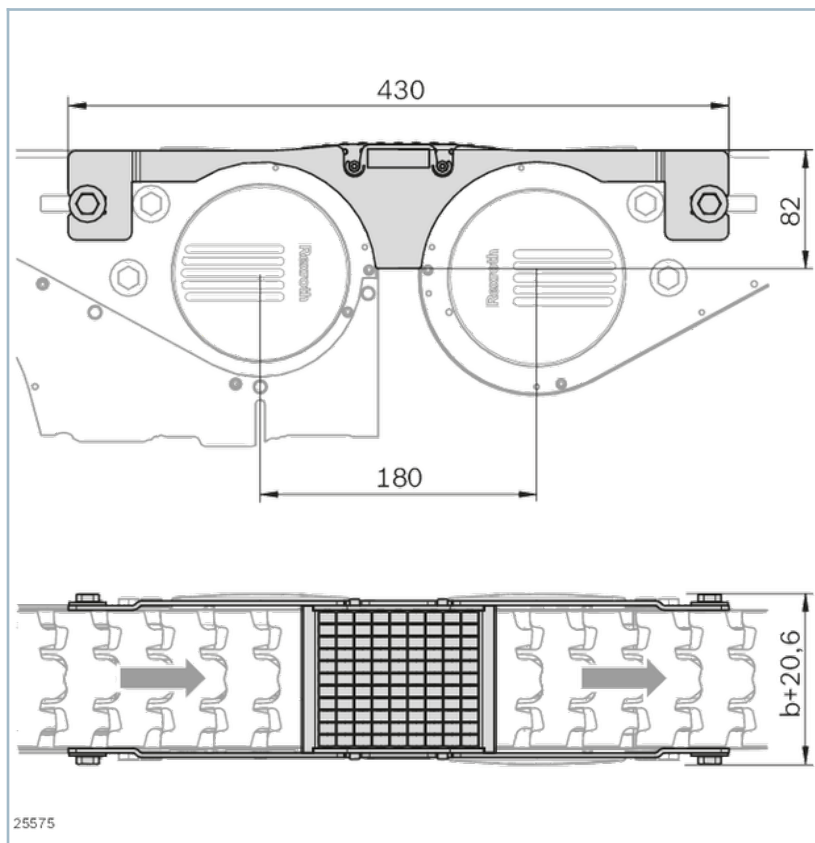

Connection kit passive bridge AL

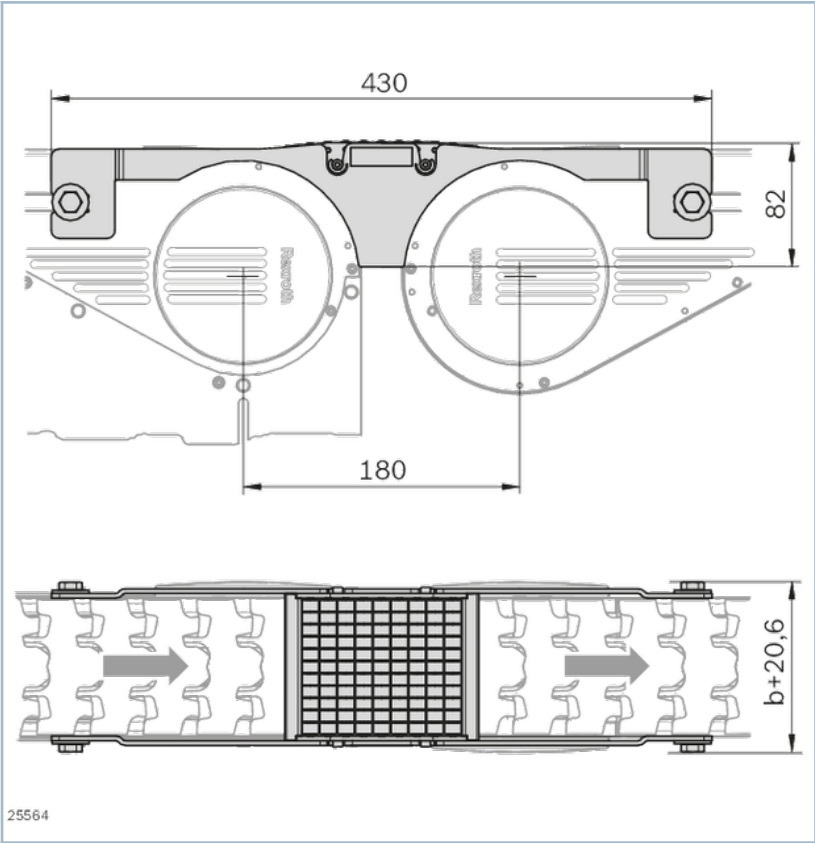

Delivery notes

Condition of Delivery

Partially assembled

Scope of delivery

Incl. fastening material

Ordering codes

	No.
Connection kit passive bridge VFplus 65	3842549015
Connection kit passive bridge VFplus 90	3842549016
Connection kit passive bridge VFplus 120	3842549017
Connection kit passive bridge VFplus 160	3842549018