VA 2/50 Slide Stop

- Slide stop, can be lowered pneumatically
- Reversible operation not permitted

- Detachable position sensing of the slide stop position using sensors
- Not suitable for ST 2...-H sections

Product description

The slide stop is used in a transverse section that connects more than two longitudinal sections and that requires supplementary stops. A lift transverse unit can feed in the workpiece pallet onto the longitudinal section when the slide stop is activated. The pneumatically lowerable slide stop is extended to the upper end position when the system is depressurized. Mounted inside the tracks, directly on the conveyor section.

Technical data

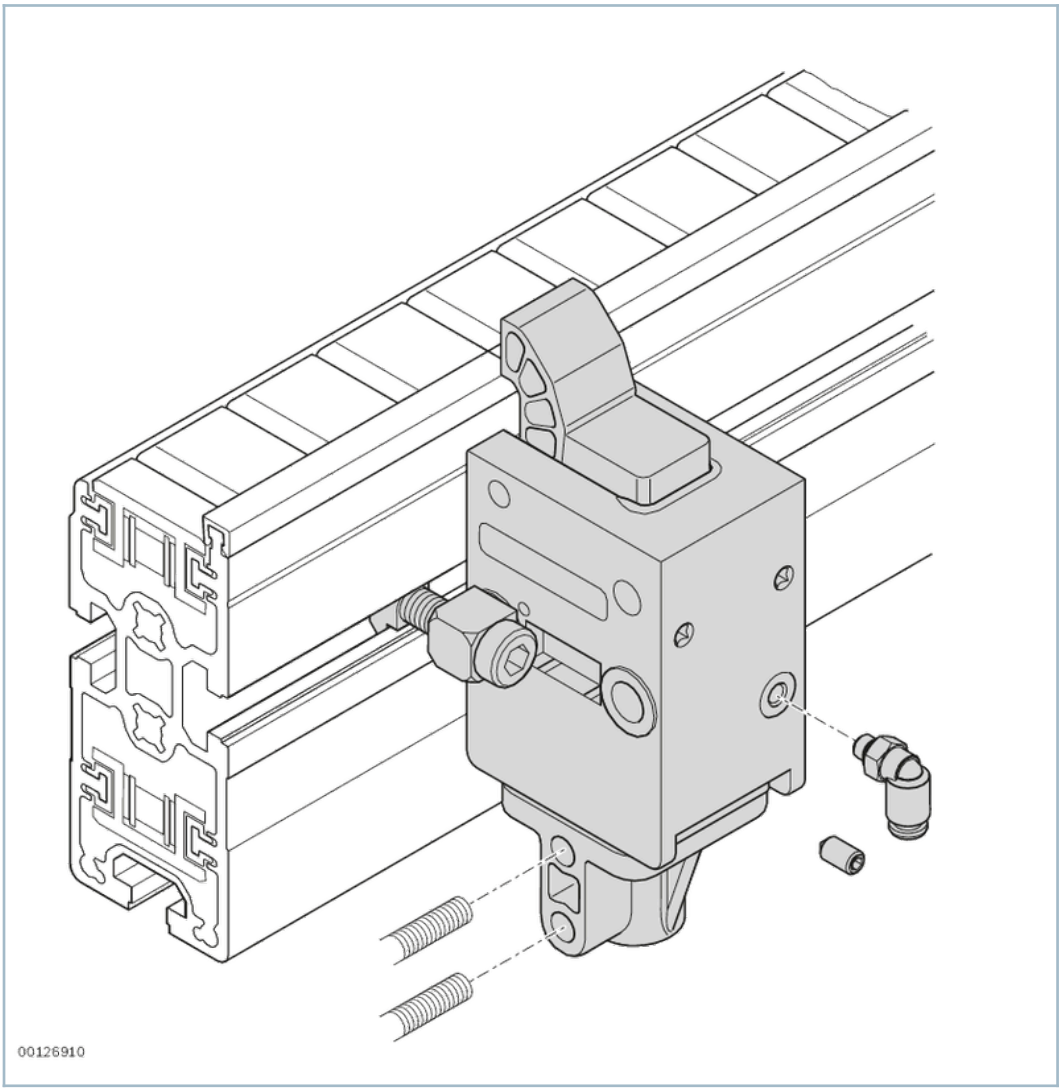

No.			3842528808
Max. total weight of workpiece pallet	m_G	kg	50
Max. operating temperature	T	°C	60
Material entry			Housing: PA 6 Safety catch: Brass Lug cam: PA 66
Required compressed air connection	p	bar	4 ... 6 bar
Pneumatic push-in fitting	Ø	mm	4

Compressed air consumption of TS 2plus units

Symbols/Circuit diagrams

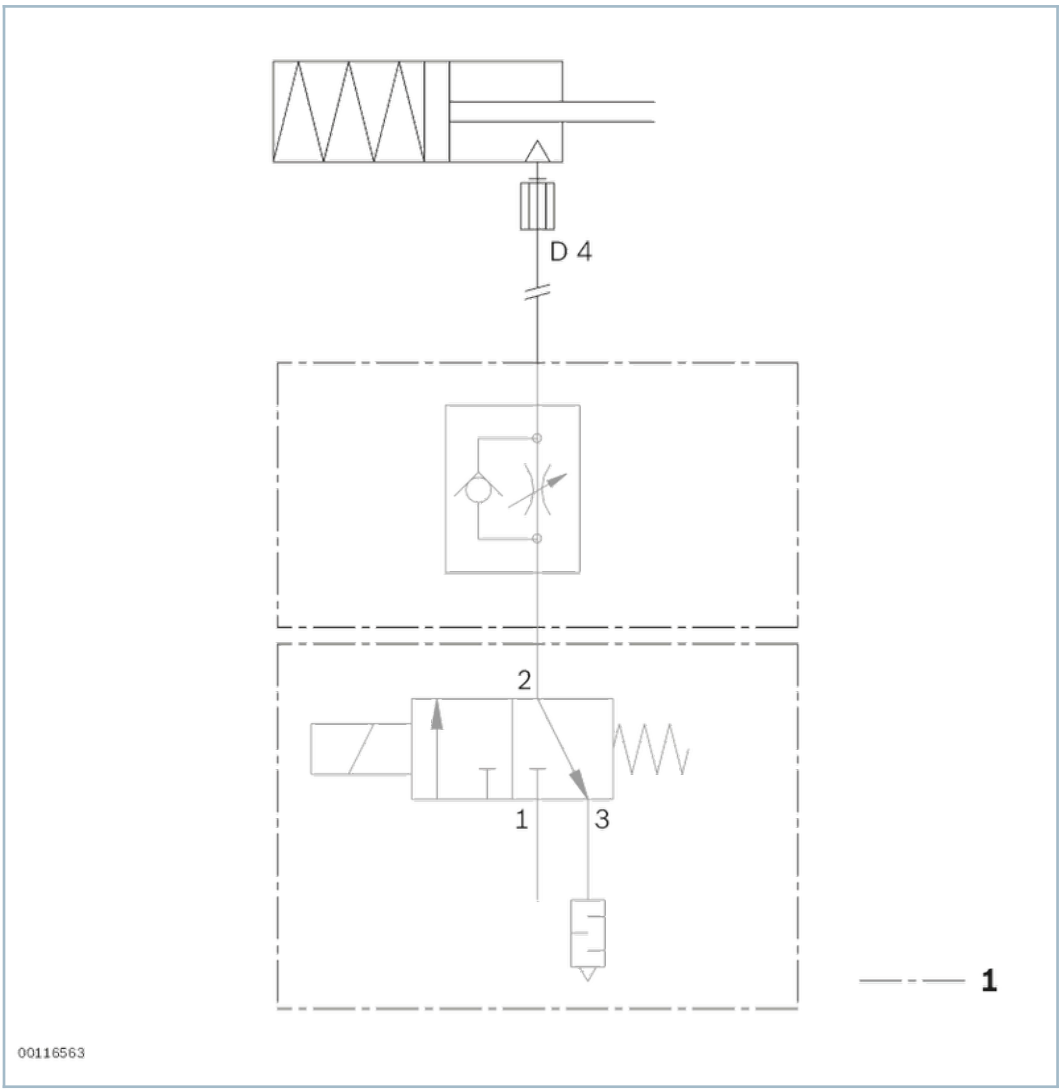

1) Not included in the scope of delivery

Dimensions

VA 2/50 Slide Stop

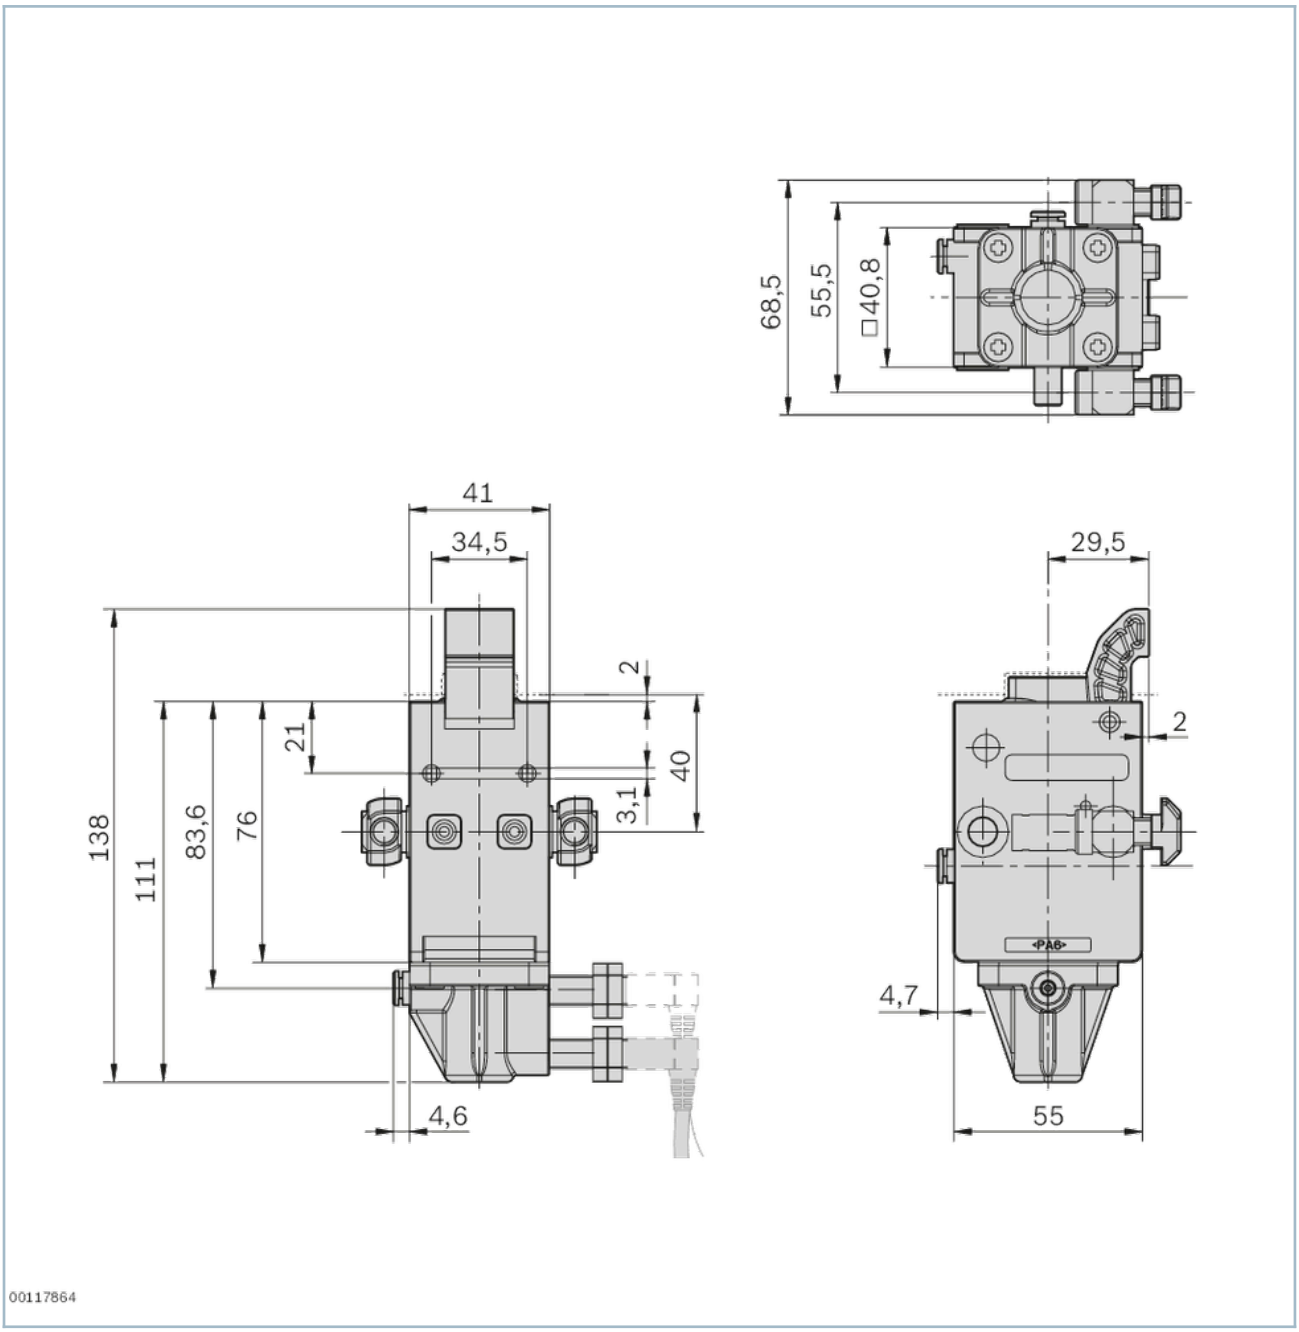

Accessories

Recommended accessories

2x sensor M8x1

Delivery notes

Scope of delivery

Incl. all fastening material to mount on ST 2/... conveyor section
Position inquiry

Ordering codes

	No.
VA 2/50 Slide Stop	3842528808