


Strut profile 40x40L 2NVS

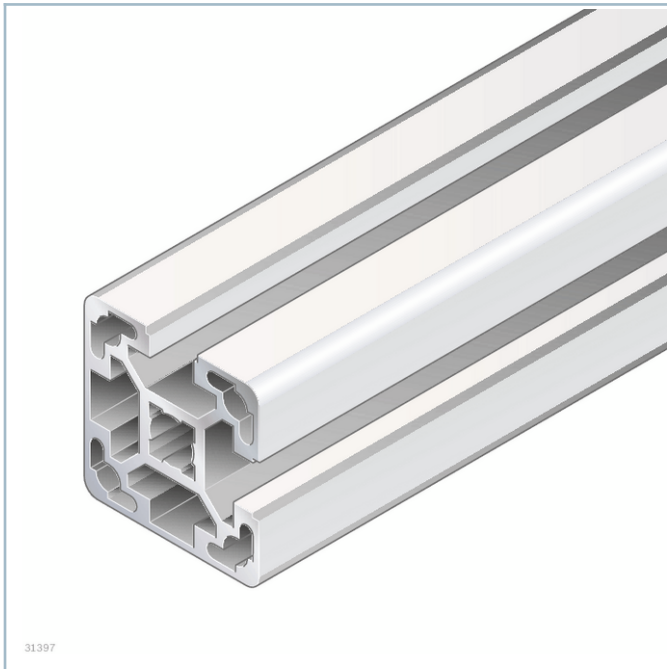

Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data


[Quick & Easy profile finishes](#)

Dimensions

Strut profile 40x40L 2NVS

40x40L 2NVS

$A = 6,0 \text{ cm}^2$
 $I_x = 9,7 \text{ cm}^4$
 $I_y = 9,7 \text{ cm}^4$
 $W_x = 4,9 \text{ cm}^3$
 $W_y = 4,9 \text{ cm}^3$
 $I_t = 4,5 \text{ cm}^4$
 $W_t = 2,7 \text{ cm}^3$
 $m = 1,6 \text{ kg/m}$



19203



Ordering codes

The following caps with holes are needed:

40x40 signal gray (1 item)

40x40 black (1 item)

The following cover caps are needed:

40x40 signal gray (1 item)

40x40 black (1 item)

	L			ESD	No.
	mm				
Strut profile 40x40L 2NVS	50 ... 6070		1		3842993189
Strut profile 40x40L 2NVS M12/M12	110 ... 6000		1		3842993190
Strut profile 40x40L 2NVS, 20xL=6070mm	6070	20			3842529365
Strut profile 40x40L 2NVS Q&E	50 ... 6070		1		3842993721
Cover cap 40x40, signal gray			100		3842548746
Cover cap 40x40, black			20		3842548747
Cover cap with hole 40x40, signal gray			20		3842548782
Cover cap with hole 40x40, black			20		3842548783
Strut profile 40x40L 2NVS	6070		1		3842529366

Quick&Easy profile finishes

Standard profile finishes (note minimum length)		M12 / D9.8 / D17 / DB17
Customized profile finishes ($L_{max} = 5400\text{ mm}$) ¹⁾		DI / DIS / MT / MTS / MI / MIS / DG

1) $DG_{max} = 45^\circ$; $L_{min1} / L_{min2} = 370 / 440\text{ mm}$