


Strut profile 20x60

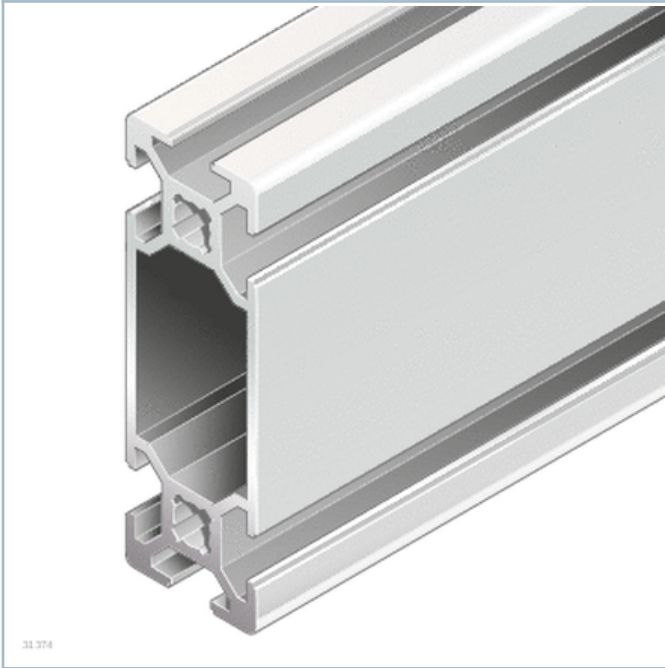

- Strut profiles with 6 mm slot for light structures, such as supports and lab fixtures
- The 20x40 and 20x60 profiles are particularly suitable for reinforcing
- The 20x40x40 profile is suitable for constructing show cases, flow racks and enclosures

Product description

Quick & Easy profile finishes

Introduction to strut profiles

Technical data


No.	Material
3842992992	Anodized aluminum
3842537819	
3842993698	
3842548828	PP
3842548829	
3842523239	Anodized aluminum

Groove			6	
Moment of inertia	I_x	cm ⁴	14.2	14.2
	I_y	cm ⁴	1.7	1.7
Moment of resistance	W_x	cm ³	4.7	4.7
	W_y	cm ³	1.7	1.7
Torsion index	I_T	cm ⁴	2.3	2.3
	W_t	cm ³	2	2
Mass	m	kg	0.9	0.9

Quick & Easy profile finishes

Dimensions

Strut profile 20x60

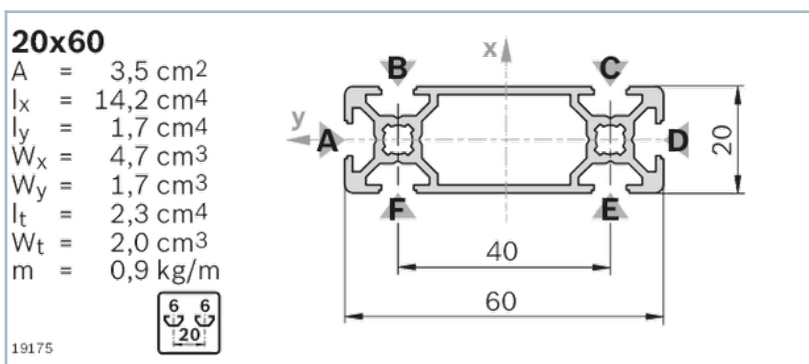

Ordering codes

The following cover caps can be used:

20x60 signal gray (1 item)

20x60 black (1 item)

	L			ESD	No.
	mm				
Strut profile 20x60	50 ... 3000		1		3842992992
Strut profile 20x60, 16xL=3000mm	3000	16			3842537819
Strut profile 20x60 Q&E	50 ... 3000		1		3842993698
Cover cap 20x60, signal gray			20		3842548828
Cover cap 20x60, black			20		3842548829
Strut profile 20x60	3000		1		3842523239