LU 2 Automatic Lubrication Unit

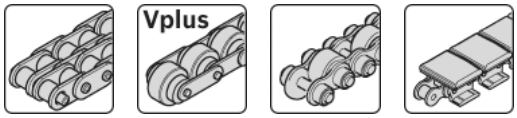

- Modular design made up of LU 2 automatic lubrication unit, LC 2 oil container and adapter set
- LU 2 automatic lubrication unit with drive, compressed-air connection to drive module and fastening material

PDF Assembly instructions

- LC 2 oil container with Structovis GHD from Klüber containing 0.25 l (must be ordered separately)
- Specific adapter sets with compatible lubrication pins for different drive modules
- Adjustment of lubrication amount to be distributed per metering process on the LU 2 automatic lubrication unit. The metering process is actuated by an external PLC.
- Designed for lubricating one belt section or one conveyor unit
- Use of the LU 2 automatic lubrication unit is strongly advised for flat top chains

Assembly-Technology, PDF version, 2023-08-223, © Bosch Rexroth AG, subject to change.
Valid edition only on the Internet. Copies of any type are not subject to change.

Product description

Increasing the system service life by means of continuous and maintenance-free lubrication of flat top chains, accumulation roller chains and duplex chains during operation. Prevention of dry running.

Suitable for use with all belt sections and conveyor units; lubrication unit on the drive module. Reduction of oil consumption thanks to exact metering and pinpoint application to the chain links.

Technical data

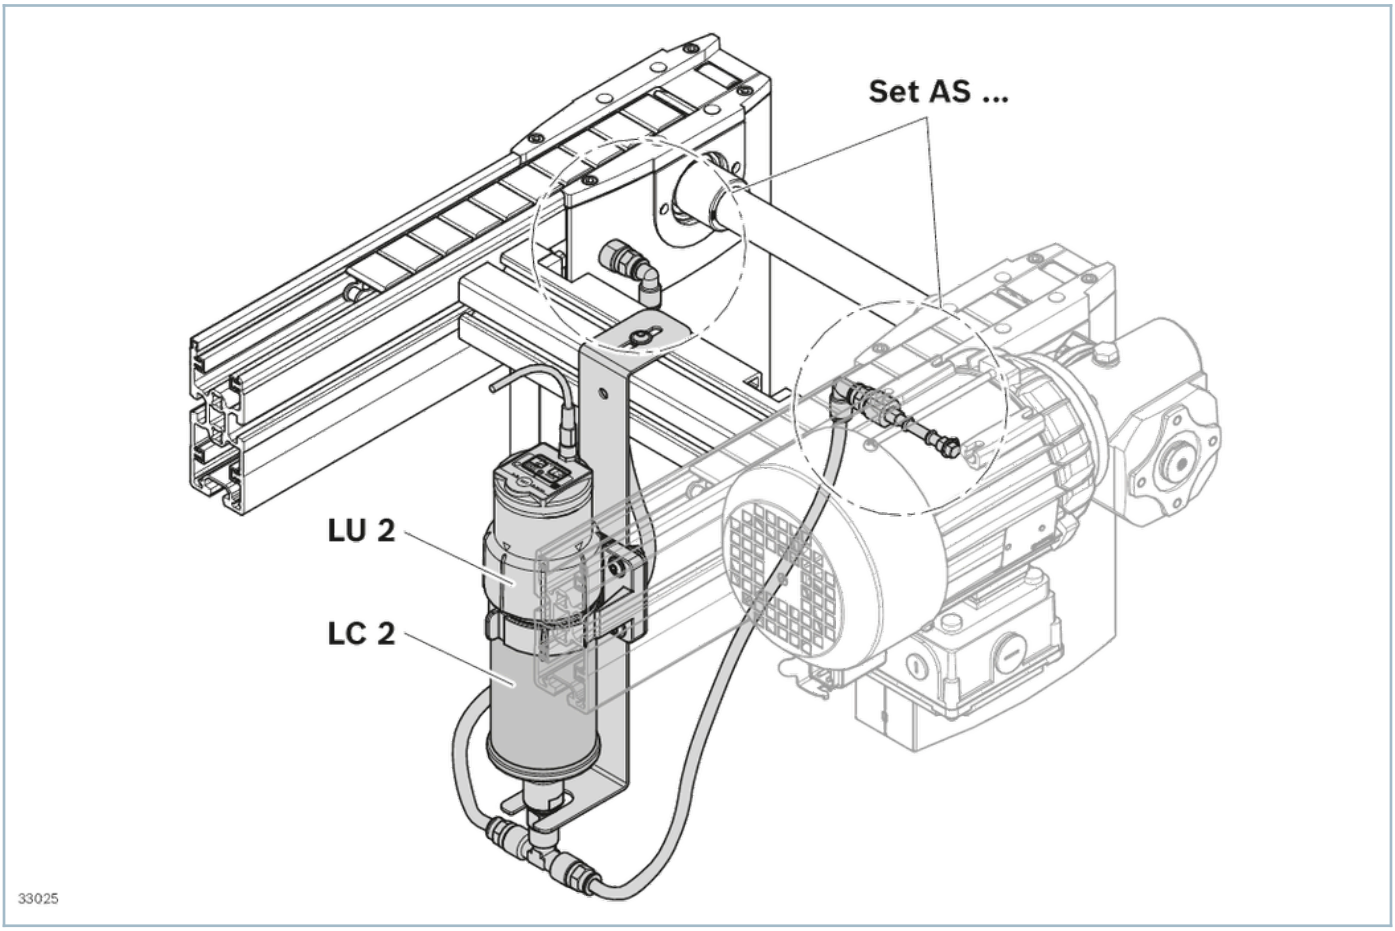

No.			3842543482	3842543469
ESD			yes	
Max. operating temperature	T	°C	+40	

Ordering codes

		No.
LU 2 Automatic Lubrication Unit		3842543482
LC 2 oil container	4	3842543469