


Drive Module AS 2/R-2200




- For conveyor unit self-assembly
- For use in conjunction with UM 2/... return units and ST 2/... sections

- Conveyor medium: accumulation roller chain (suitable for use in an EPA)
- Motor mounting on right, left or centrally (centrally on track widths of 240 mm and above)
- Motor connection: optionally with cable/plug or terminal box motor connection
- Special models on request

Product description

The AS 2/R... drive module drives the accumulation roller chain conveyor medium in self-built conveyor units with sections, return units and accumulation roller chains.

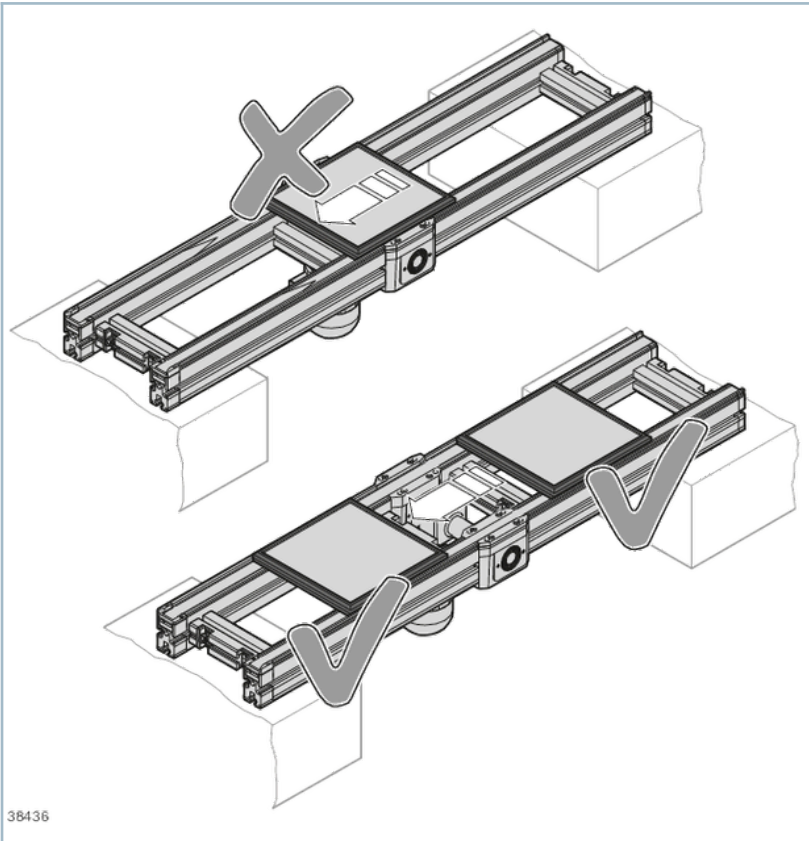

Energy efficiency – Rexroth 4EE



Technical data

No.			3842998041
Max. section load in accumulation operation		kg	2200
ESD			yes
Required conveyor media length	l_{AS}	mm	625

-

Transport and nominal speed v_N

-

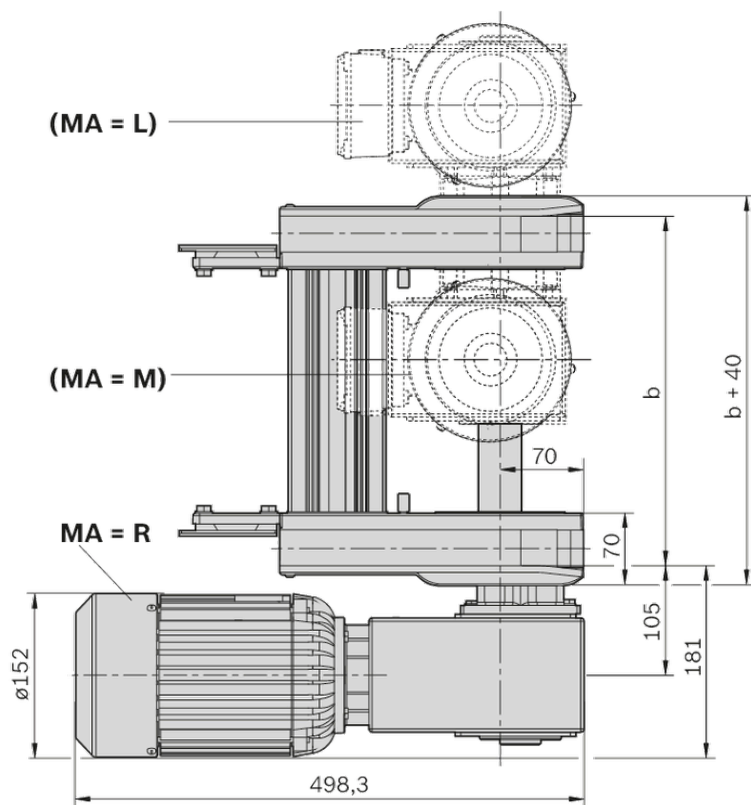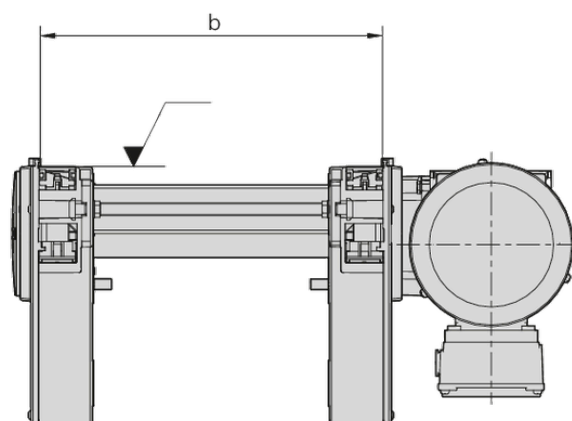

Delivery notes

Condition of Delivery

Fully assembled

Ordering codes

Order Parameter

No.		3842998041
b (mm)	Track width in the direction of transport	160; 240; 320; 400; 480; 640; 800; 1040; 1200
		160 ... 1200
v_N (m/min) ¹⁾	Nominal speed	0; 6; 9; 12; 15; 18
U, f (V, Hz)	Voltage, frequency	see motor data
AT	Motor connection S: cable/plug K: terminal box	S; K
MA ²⁾	Motor mounting R: right L: left M: center	R; L; M

1) $v_N = 0$: without motor or gear

2) MA = M where $b \geq 240$ mm only

	No.
Drive Module AS 2/R-2200	3842998041