

Section ST 2/R-100



The section is used for the construction of conveyor units in conjunction with the drive modules AS 2/R and the return units UM 2/R... .

- For conveyor unit self-assembly for higher section loads
- For use in conjunction with drive modules AS 2/R..., return units UM 2/R-..., and steel glide profiles GP 2/...

Recommended accessories

- Leg sets SZ 2/...
- Cross connector
- Profile connector
- FP 2/U is recommended for long sections > 6 m, for operation with specific load > 2 kg/cm and for large workpiece pallets


Scope of delivery

- 2x section profile SP 2/R with assembled guide and glide profiles GP 2/H-KS, GP 2/H-ST, GP 2/C/R, FP 2/C/R

Condition on delivery

- Assembled

Ordering information

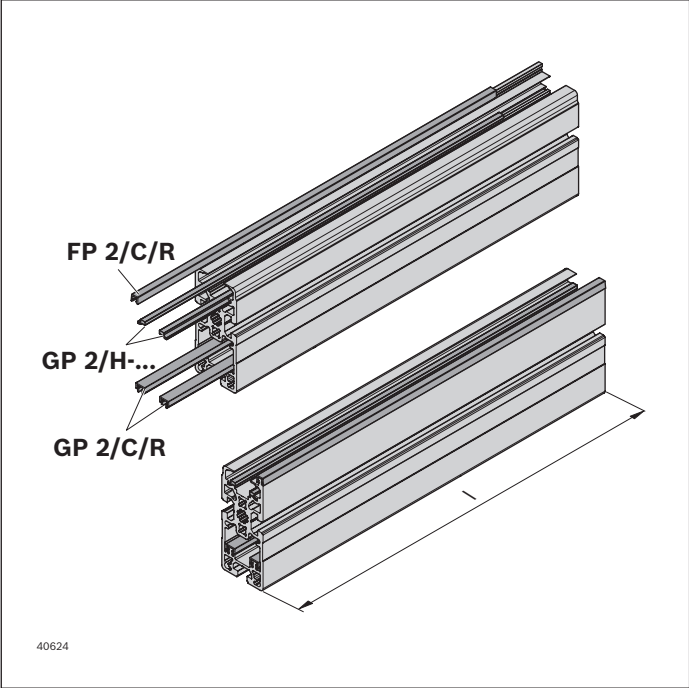


Material number		3842994190
l (mm)	Length	60 ... 6000
GP	Glide profile	0; 1
		0 = plastic ¹⁾
		1 = steel

¹⁾ max. 1 kg/cm specific line load

Technical data

Material number		3842994190	
Material specification		Glide profile: GP 2/C/R: PA, GP 2/H-KS: PA, GP 2/H-ST: Steel; corrosion-resistant Guide profile: FP 2/C/R: PA Section profile: Aluminum, natural; anodized	
Max. operating temperature	T	°C	+40
Length	l	mm	60 ... 6000

Dimensions

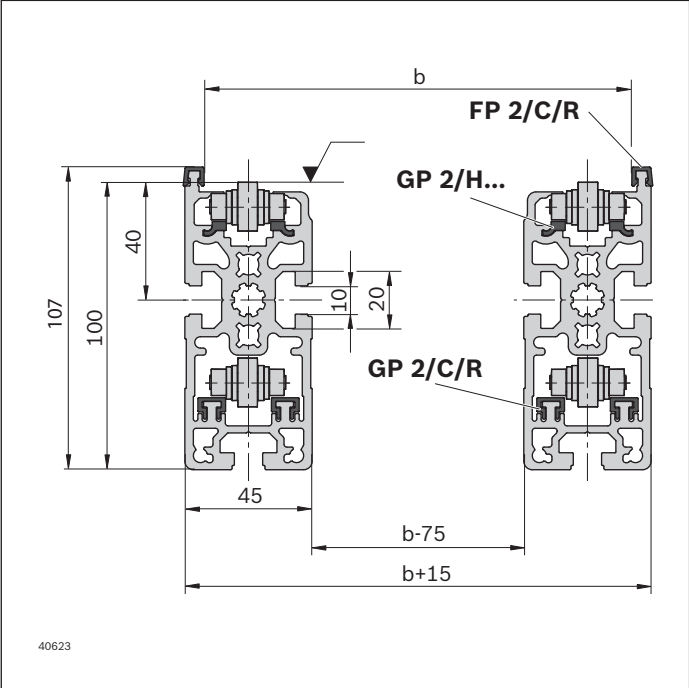

The data specified above only serves to describe the product. Due to the continuing development of our products, no statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not exempt the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.