
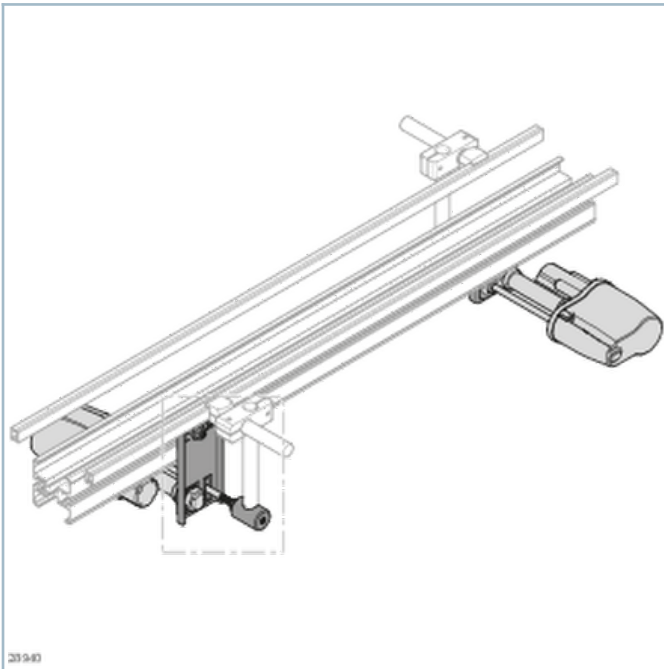


Pneumatically adjustable lateral guide




- Mounting and adjustment mechanisms are placed under the conveyor system for easy accessibility of the transported material
- Mounting and adjustment also in horizontal and vertical curves. A customer-side adjustment is required for horizontal curves

[PDF](#) Assembly instructions

Product description

The complete lateral guide can be adapted to rapidly changing product dimensions, especially when the conveyors are not easily accessible. The pneumatically adjustable lateral guide is composed of the adjustment unit (A), the assembly kit (B), and components from the lateral guide program.


- Size: 65-320
- Max. pressure against the lateral guide (on one side): 30 N/700 mm
- Synchronous, uniform adjustment
- Adjustment by means of pneumatic valve (operating pressure 4 ... 5 bar, switching every 2 seconds (depending on length of the pneumatic pipes and the number of adjustment units per valve))
- Adjustment range for each side: 16 strokes at 2 mm = 32 mm, after 16 switching operations the adjustment unit returns to its initial position
- Maximum number of adjustment units per valve: 8 pieces
- User-side position monitoring is recommended

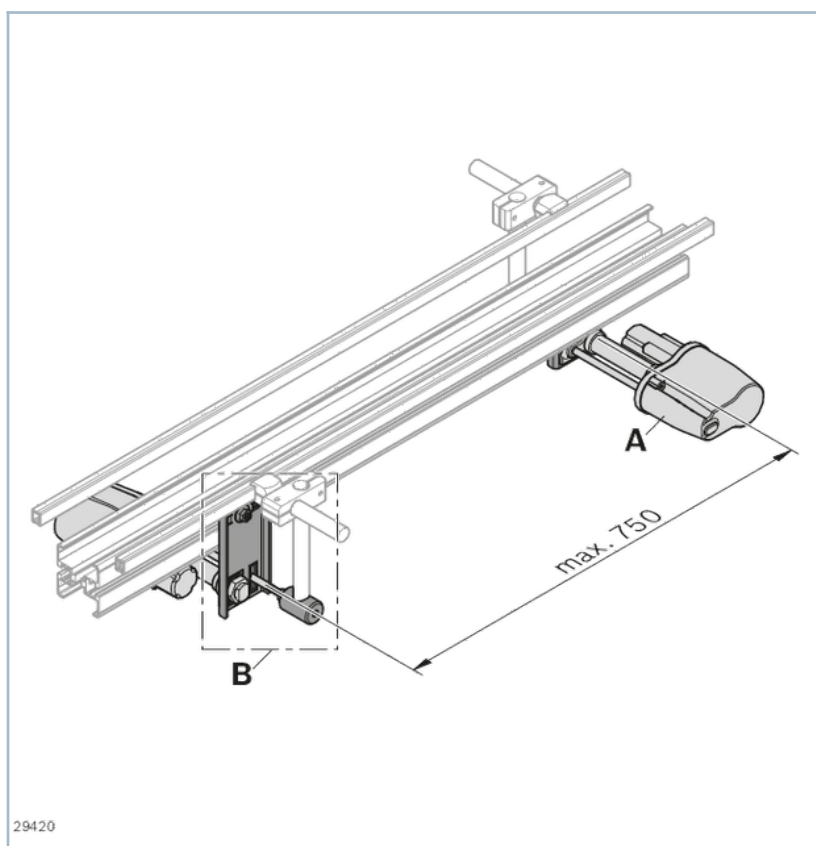

Technical data

Track width b	X min	X max
65	0	116
90	0	141
120	0	171
160	0	211
240	0	291
320	0	371

Dimensions

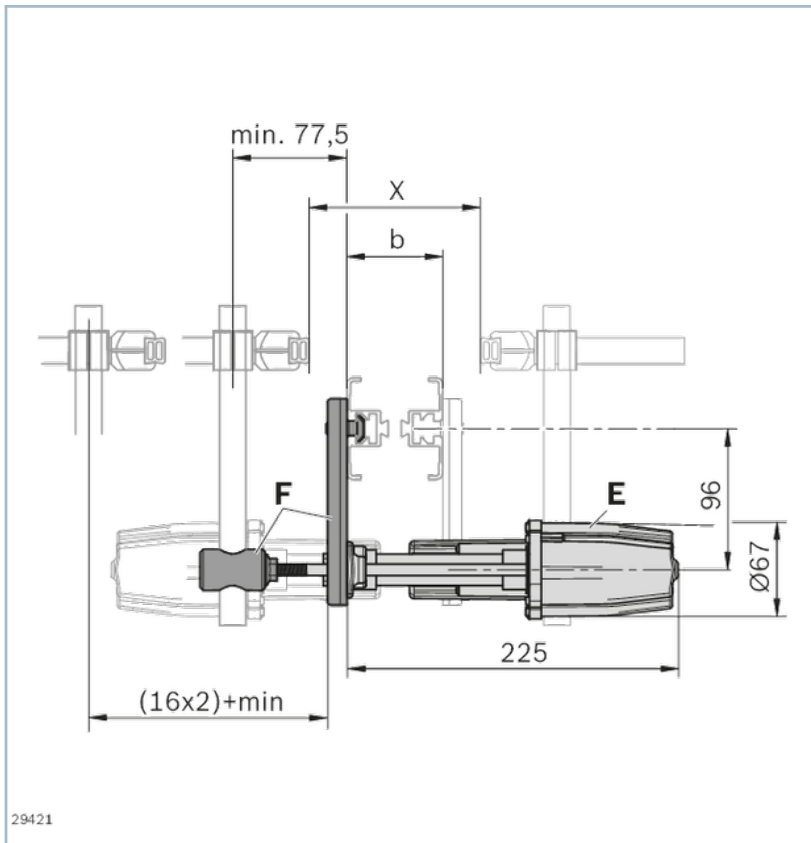


Accessories

Required accessories


Profile rail

One 4/2 directional control valve per 8 adjustment units

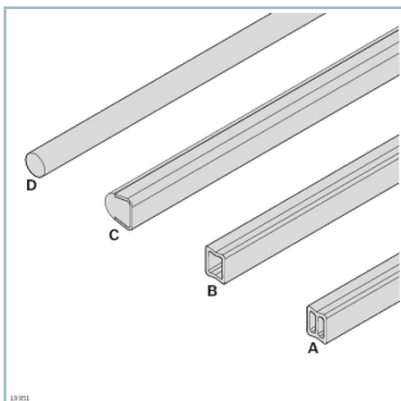


Sectional rails for lateral guides

- Sectional rails for lateral guiding of the transported material
- Suitable for fixed lateral guide holders and variable lateral guide holders
- Various materials and geometries for different applications

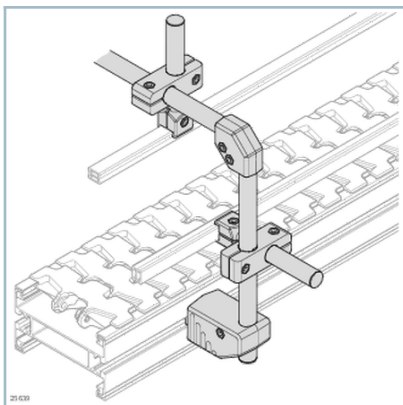

Clamping holder, clamping head

- Clamping holder C L100
- Clamping holder C
- Clamping holder D12 L100
- Clamping holder D12
- Clamping head

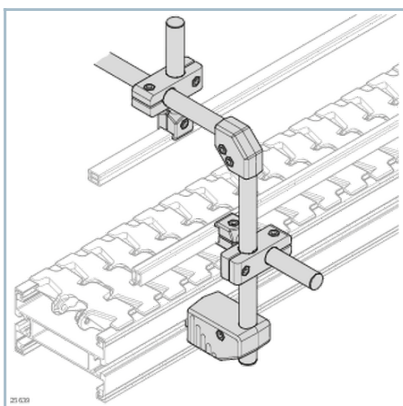

Holder for height-adjustable guides

- Vertical clamping holder D18 L160
- Tube D18
- Crosspiece
- Corner piece

Delivery notes

Condition of Delivery

Fully assembled Not assembled

Scope of delivery

Incl. fastening material

Ordering codes

	No.
Lateral guide adjusting unit	3842547707
Mounting kit	3842547718