Flow Rack XLean

- Material supply in the supermarket or directly at the workstation
- Cost-effective solution with conveyor tracks consisting of steel profiles and plastic rollers

Assembly instructions

- Available as ESD-conductive version
- Design: Fully assembled or as a kit for self-assembly
- Allows for the addition of any desired modules, including cross ties and conveyor tracks as well as individual components

Assembly-Technology, PDF version, 2023-08-223, © Bosch Rexroth AG, subject to change.
Valid edition only on the Internet. Copies of any type are not subject to change.

Product description

Flow rack systems

Technical data

Flow rack systems – Technical data

Dimensions

Assembly-Technology, PDF version, 2023-08-223, © Bosch Rexroth AG, subject to change.
Valid edition only on the Internet. Copies of any type are not subject to change.

Flow Rack XLean

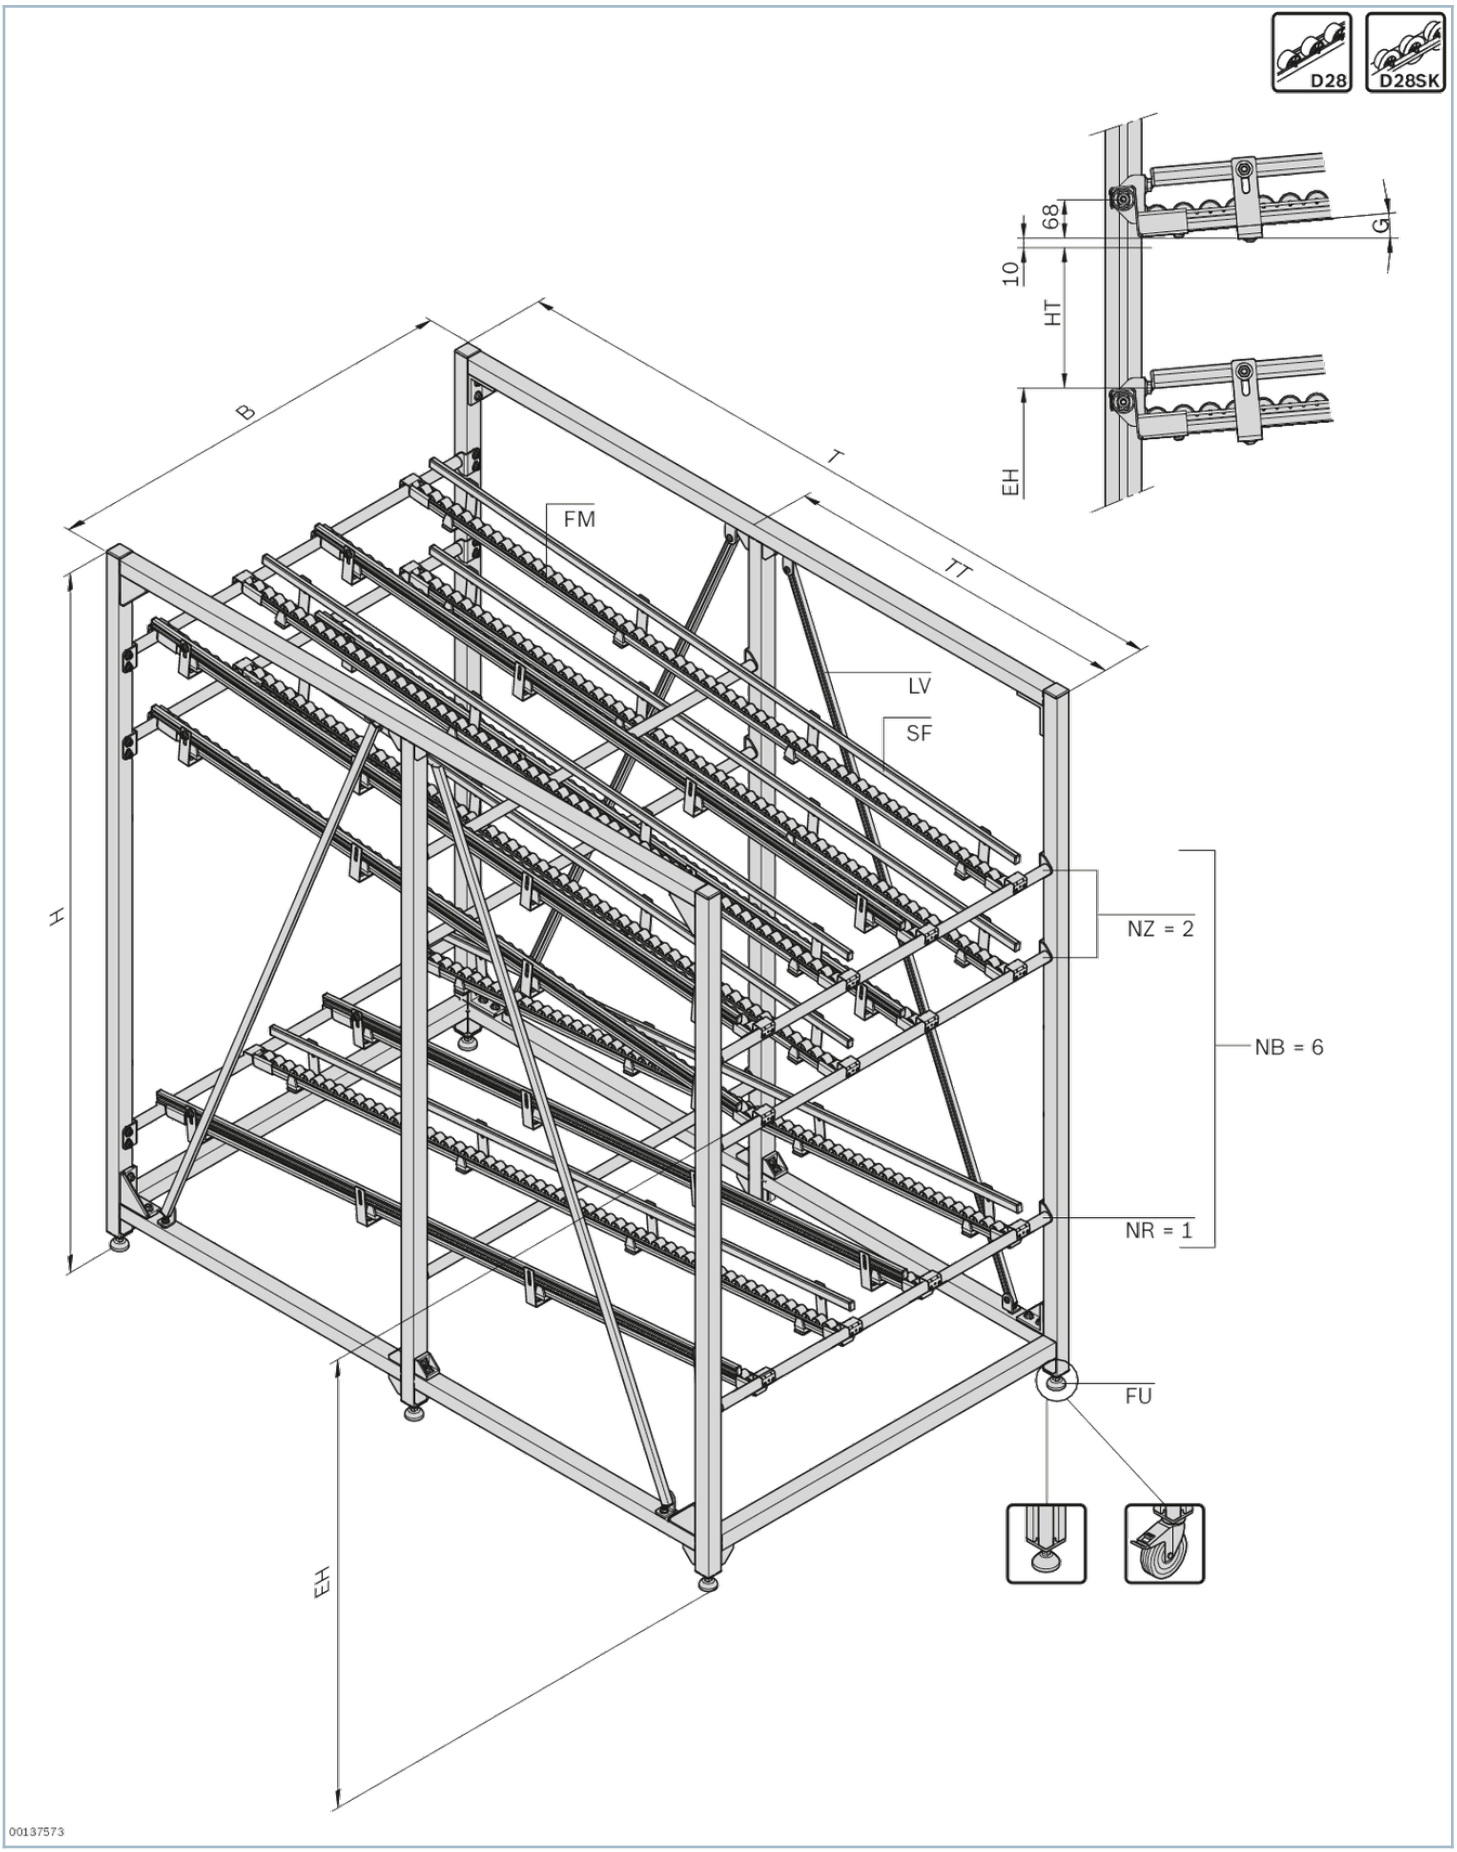

Ordering codes

Order Parameter

		3842998249
A	Design	Disassembled, assembled
Type	Number of side elements	0, 1, 2
ESD	Conductivity	yes, no
FU	Foot type	Leveling foot, LR
LV	Load version	400 kg, 2000 kg
B	Flow rack system width	400 ... 1500 mm
H	Flow rack system height	600 ... 2000 mm
T	Flow rack system depth	400 ... 6000 mm
G	Gradient	0 ... 10 % (recommended: 6 %)
PT	Cross tie type	Tubular cross tie, tubular cross tie with bracket, double tubular cross tie
EH	Removal height of the lower supply level	263 ... 1800 mm
HT	Transportation height	80 ... 1200 mm
NZ	Number of supply levels	1 ... 8
NR	Number of return levels	0 ... 7
NB	Number of conveyor tracks	0 ... 64
FM	Conveyor medium	Rollers with Ø28 mm with/without roller flange
SF	Lateral guides	with; without

	No.
Flow Rack XLean	3842998249