
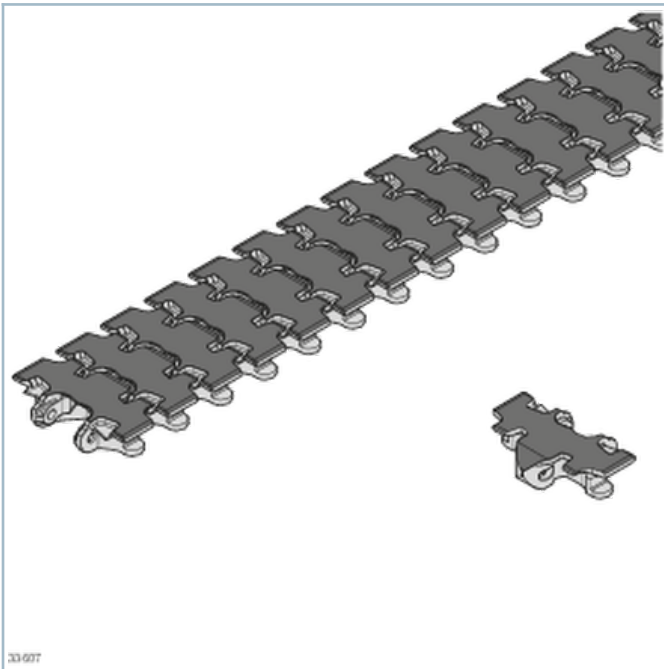


Flocked chain



- Is used on sensitive transport surfaces (for example, gloss, clear, barcode, raised printing)

Product description


- Transport on uphill or downhill gradients up to about 7° possible, depending on the product (test required)
- For products susceptible to accumulation
- Maximum chain tensile force: 1250 N
- Size: 90
- Only dry use
- Maximum permissible tracking force: 5 N/chain link
- Not suitable for sharp-edged products
- Combination with chain links of different chain types is not advisable
- Soft PA-flocking 3.3dtex for sensitive product surfaces

Technical data

No.	Material
3842553023	Chain link: POM Flocking: PA 3.3dtex, anthracite Chain pin: Non-rusting steel 1.4301 Pivot pin: PA 66
3842547727	Non-rusting steel 1.4301 ¹⁾
3842547216	PA 66 ¹⁾

1) Materials meet the requirements of EU 10/2011 and FDA CFR 21

Dimensions

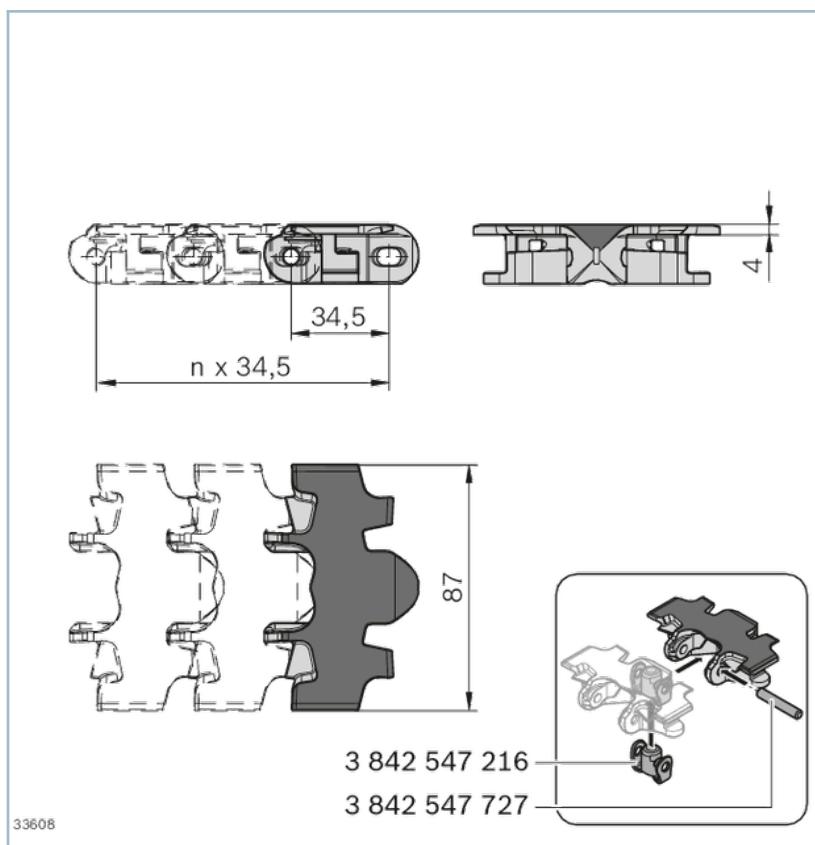Flocked chain VF*plus* 90

Information

Note: Not suitable for standard VarioFlow plus WT system

Accessories

Required accessories

For single chain links: chain pin and jointed bolt

Delivery notes

Condition on delivery

Chain: fully assembled

Scope of delivery

Chain: complete, incl. chain pin and jointed bolts

Ordering codes

	L		No.
	mm		
Flocked chain VF <i>plus</i> 90	4968	1	3842553023
Chain pin		100	3842547727
Swivel pin		100	3842547216