


Drive head LF20S

- Drive head for transferring drive torque to a toothed belt
- For direct mounting of a motor or (in conjunction with a center shaft) for mounting a hollow shaft gear or a coupling
- Mounted directly on profile by using longitudinal end connector (connector included in scope of delivery)
- Profile finishing: LF-S blind hole drilling for longitudinal end connector

Dimensions

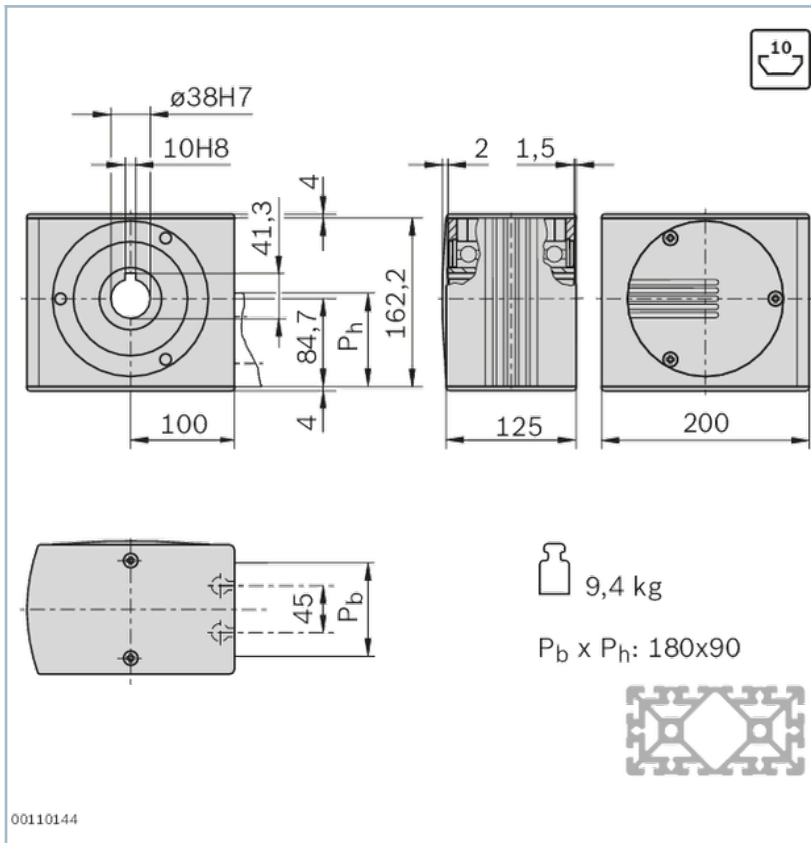

Delivery notes

FS5	FS6	FS7	FS8	FS9
 DIN7984 M12x40	 DIN 7984 M8x30  DIN 125 A8,4 	 DIN 7991 M8x30 	 $\varnothing 18 \times 7$	 $\varnothing 10 \times \varnothing 5 \times 11$

FS2	FS3
 ISO 7380 M8x40   	 ISO 4035 M8-04  

Ordering codes

	FS	No.
Drive head LF20S	4xFS2, 2xFS3	3842526414