
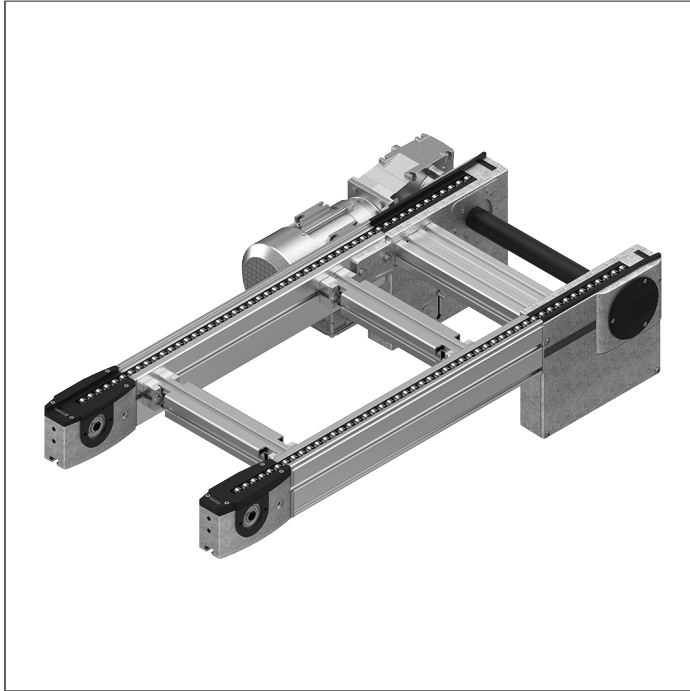


Belt section BS 2/R-V-1200



- Operational conveyor section complete with drive for high workpiece pallet speeds
- Sturdy version for especially heavy-duty systems
- Conveyor medium: Accumulation roller chain *Vplus* (suitable for use in an EPA)
- Reversible operation possible for $l \leq 2000$ mm and accumulation roller chains without small parts protection
- Motor mounting right, left or central
- Motor connection: Optionally with cable/plug or terminal box
- Special models on request

Notice: On the accumulation roller chain *Vplus*, the workpiece pallet attains a speed up to the factor of 2.5 higher than that of the chain. Special measures must therefore be observed for chain speeds > 9 m/min!

Notice: Positioning of WTs in the area of the drive heads/return heads is not permitted.

The belt section is a ready for operation conveyor section with own drive for the transportation of workpiece pallets in the longitudinal direction or for the transverse conveying of the workpiece pallet between parallel conveyor sections in connection with two lift transverse units HQ 2.


Recommended accessories

- Connection kits
- Leg sets SZ 2/...-H
- Decentralized automatic lubrication unit LU 2 or central automatic lubrication unit LU 2/P

Condition on delivery

- Assembled

Ordering information

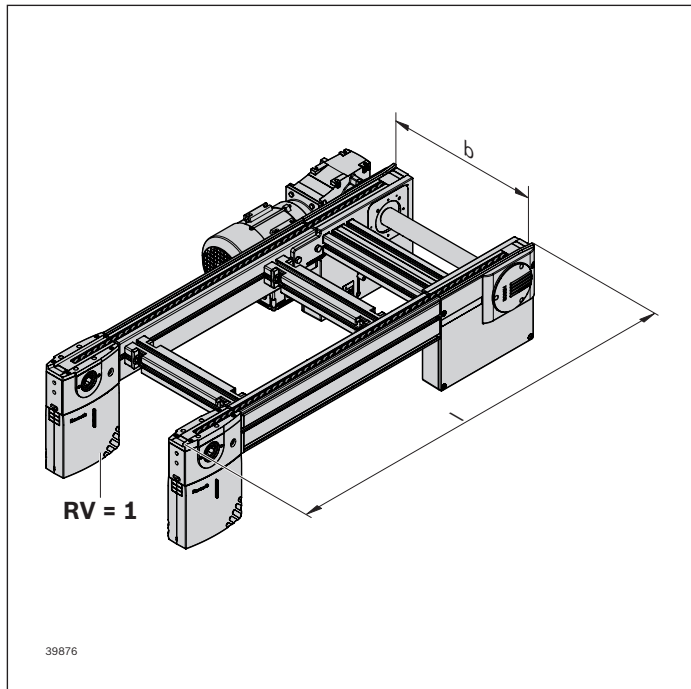

Material number		3842998941
b (mm)	Track width in direction of transport	400 ... 1200
l (mm)	Length	650 ... 6000
v_N (m/min)	Nominal speed of the chain	0 ¹⁾ ; 6; 9; 12; 15; 18 ²⁾
AT	Motor connection S = cable/plug K = terminal box	S; K
MA	Motor mounting R = right L = left M = center	R; L; M
RV	Reversible operation 0 = no reversible operation 1 = reversible operation	0; 1
KT	Chain type 2 = accumulation roller chain with steel accumulation rollers 4 = accumulation roller chain with steel accumulation rollers and small parts protection	2; 4


¹⁾ $v_N = 0$: without motor or gear

²⁾ Not possible at $f = 60$ Hz

Technical data

Material number		3842998941
Max. section load in accumulation operation	kg	1200
ESD		Yes
Material specification		Glide profile: Steel; corrosion-resistant Small parts protection: Steel
Length	l	mm
		650 ... 6000

Dimensions

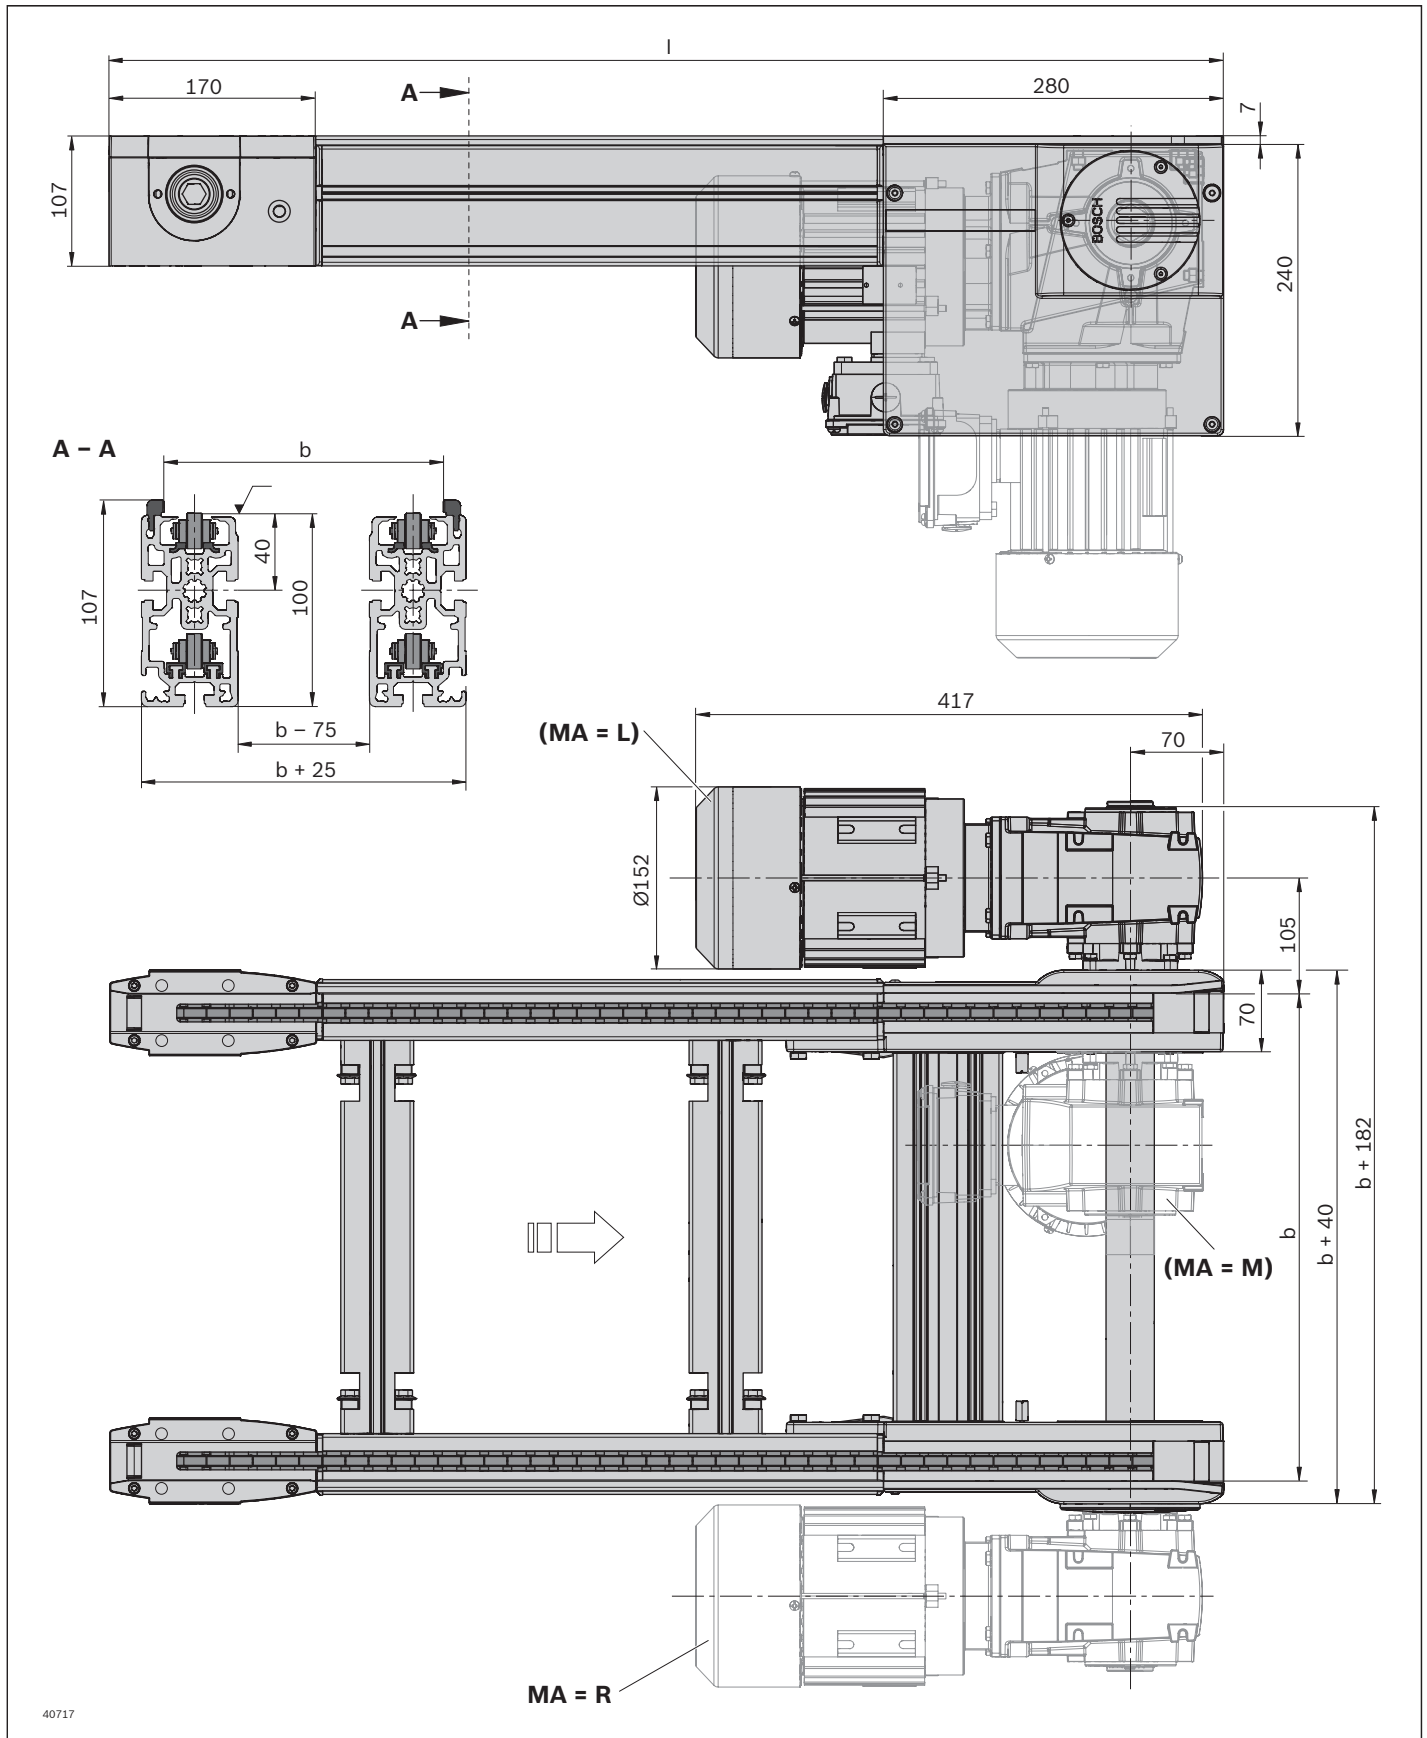

The data specified above only serves to describe the product. Due to the continuing development of our products, no statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not exempt the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.