


ESD slide rail

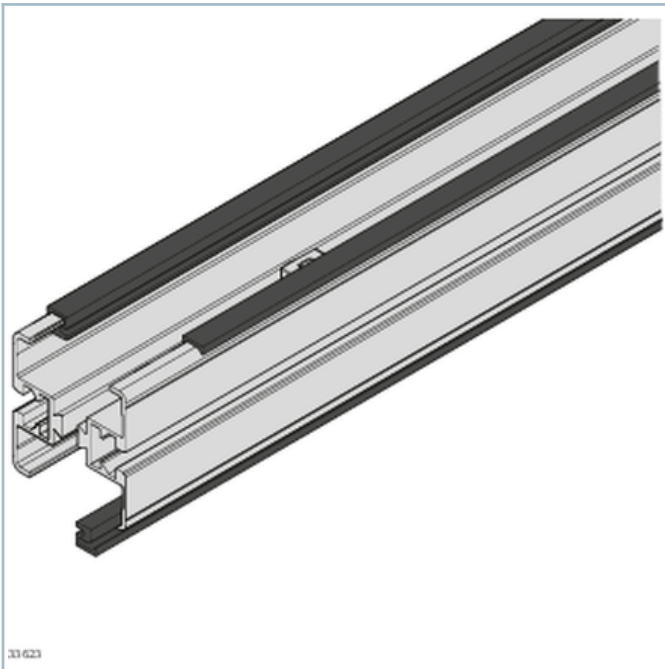

- Easy assembly - simply clip onto the section profile
- Secured against axial shifting due to lateral bolting

- Gliding surface machining: not required

Product description

The ESD slide rail is clipped into the section profile and guides the conveyor chain.

Lateral securing means the sliding surface does not need to be machined. Abrasion and noise levels are thus reduced to a minimum.

The ESD slide rail screwed to the section profile helps to safely discharge loads.

- Size: 65, 90
- Only for AL systems
- $V_{\max}$: 30 m/min
- Conduction resistance: $< 10^8 \Omega$
- Only suitable for dry operation

Extend the slide rail over the component interfaces to ensure minimum wear and noise emissions. Interruptions to the profile or component connection must be avoided. If an interruption is necessary after 10 m, the slide rail must be attached laterally with a sheet metal screw (**A**) to safely discharge loads.


Technical data

Material

PE-UHMW

Dimensions

Sliding rail ESD VFplus

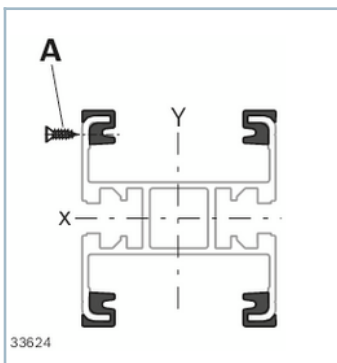

Information

Note: No horizontal sliding curves allowed.

Accessories

Required accessories

Slide rail assembly tool

Sheet metal screw 2.9x9.5 DIN 7982; DIN EN ISO 7050

1 screw per slide rail section

Ordering codes

	L		ESD	No.
	mm			
Slide rail VF <i>plus</i> ESD	30000			3842557000
Sheet metal screw		100		3842547908