

BS 2/C+R Connection Belt



- Conveyor medium: Toothed belt (suitable for use in an EPA)


[PDF](#) Assembly instructions

Product description

The head-to-head connection of the drive and return heads results in short non-driven conveyor units. The connection belt is used to bridge these > 180 mm conveyor trenches with short $l_{WT} < 320$ mm workpiece pallets.

Dimensions

BS 2/C+R Connection Belt

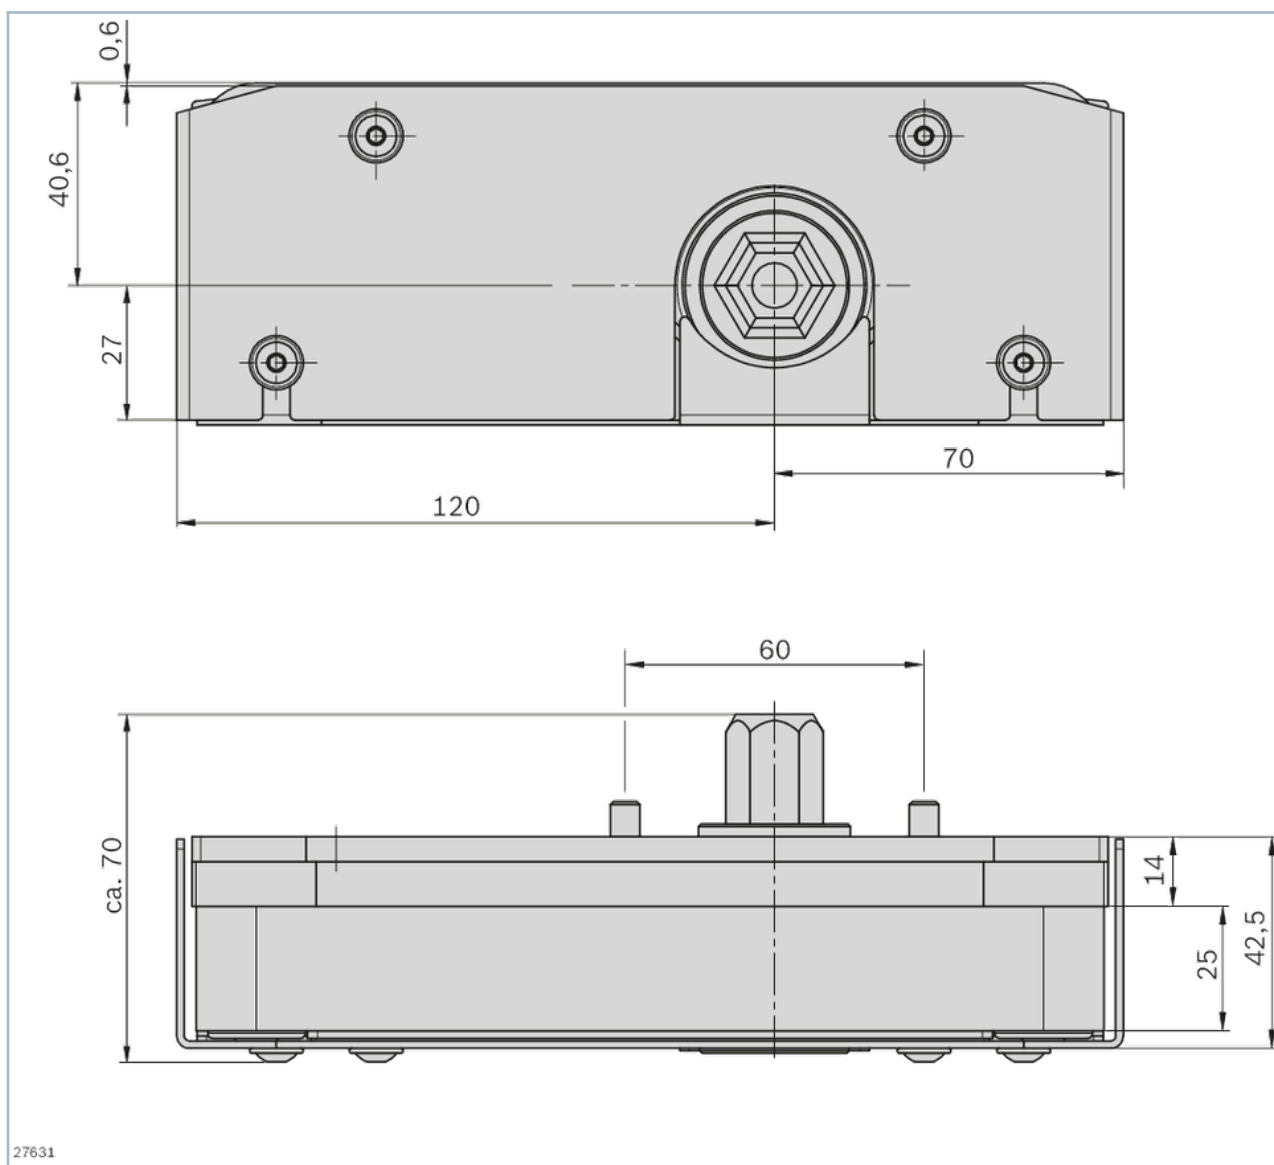

Delivery notes

Condition of Delivery

Fully assembled

Ordering codes

	No.
BS 2/C+R connection belt on left	3842528480
BS 2/C+R connection belt on right	3842539096