



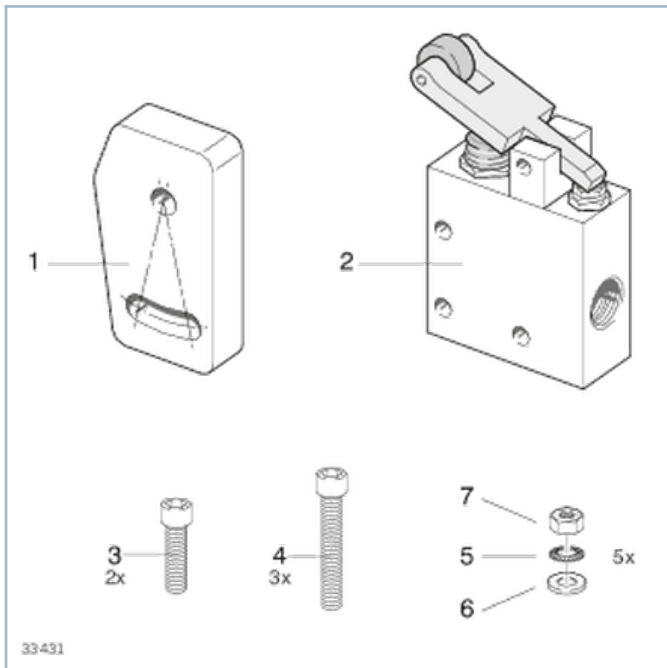


- Fasten switching tappet (1) with two cylinder head screws M6x20 (3) lock washers (6) and hexagon nuts (7) in each case to the metal bracket 'X'

Product description

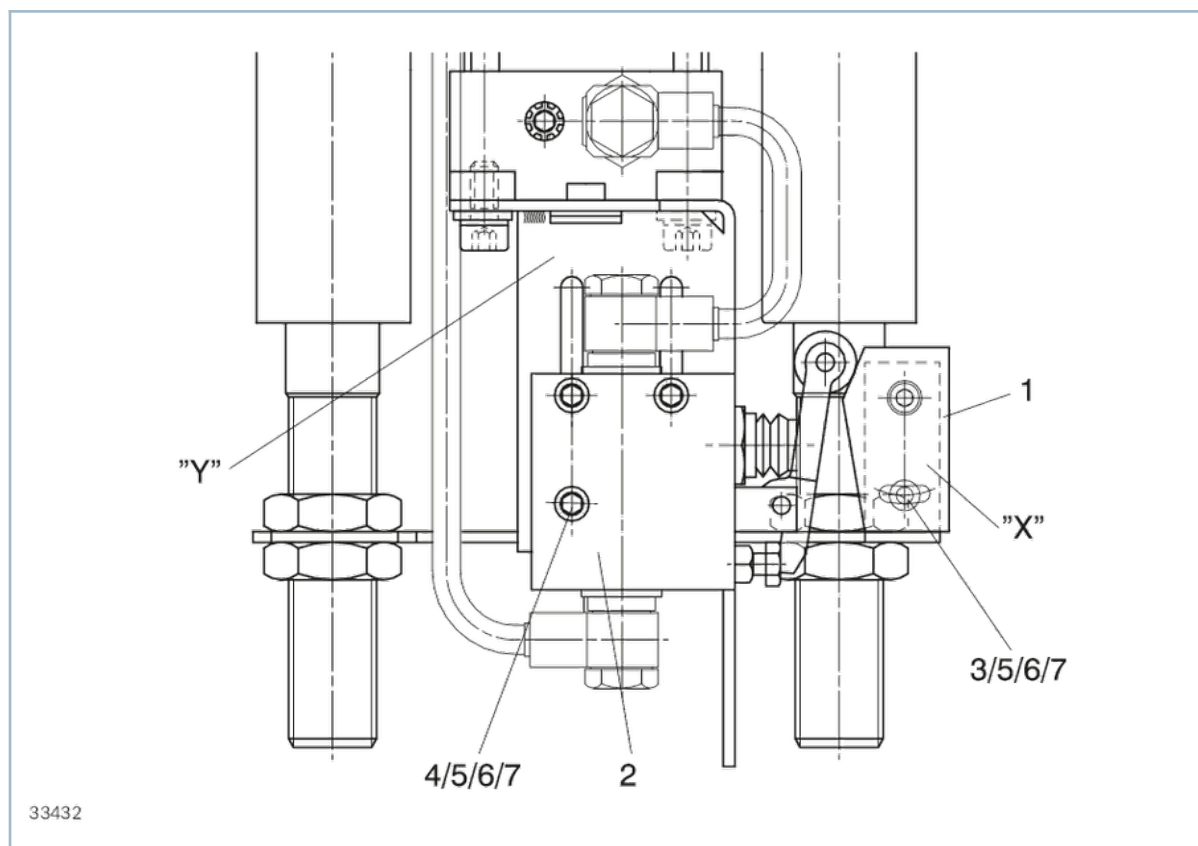

Symbols/Circuit diagrams

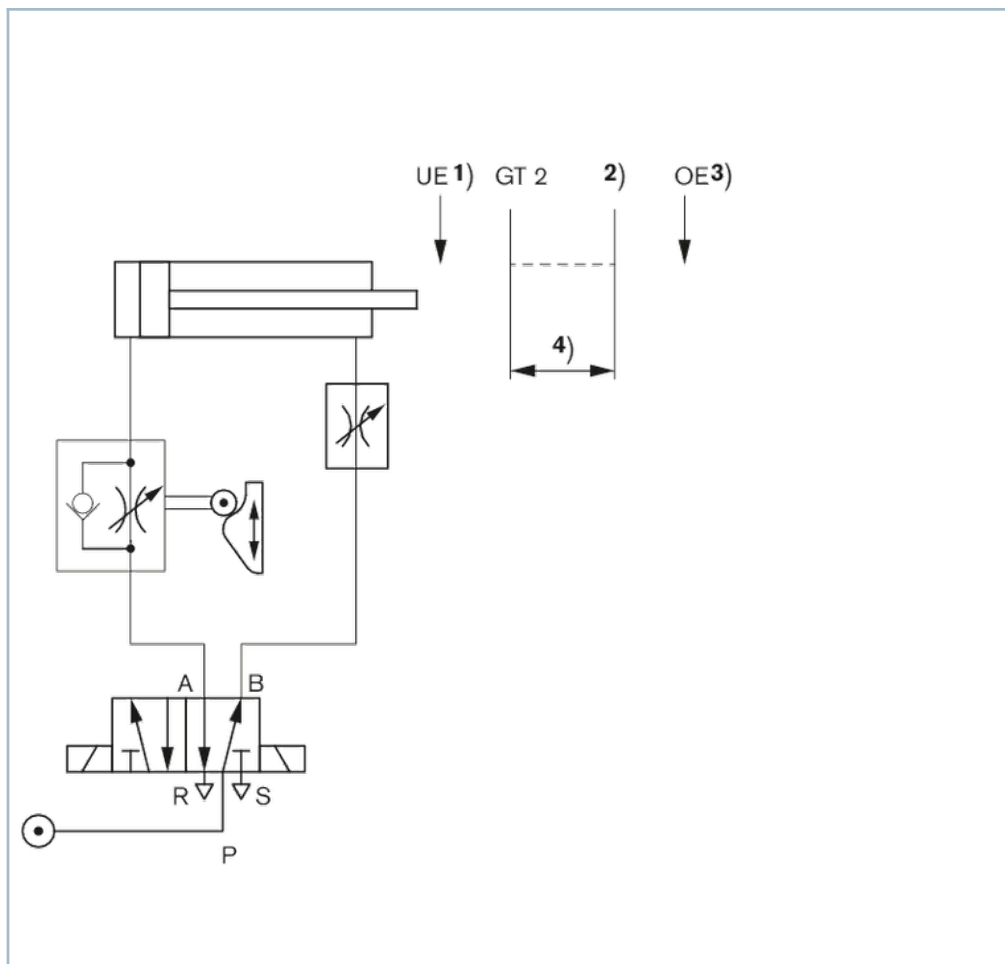

- 1) Lower end position
- 2) Tappet
- 3) Upper end position
- 4) Damping steplessly adjustable (DA 5/200, DA /1000 self-adjusting)

Ordering codes

No.
3842211355