
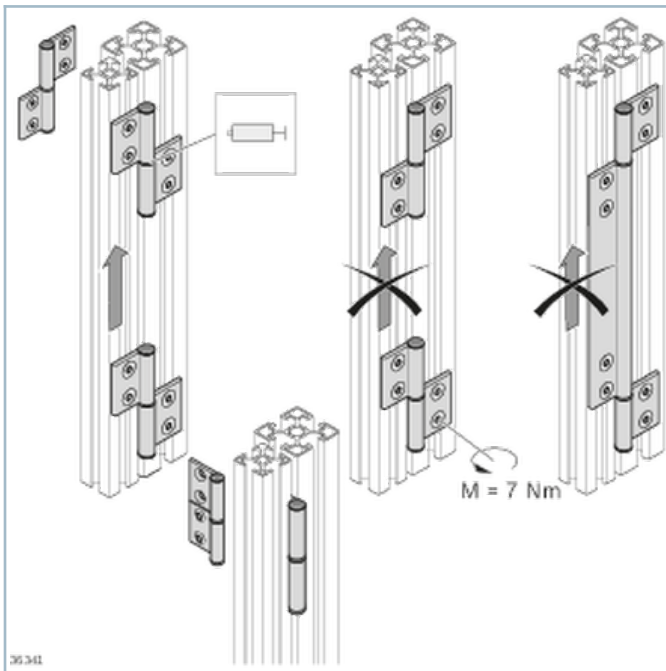


Hinge profile



- For self-assembly of hinges or hinge bands
 - Can be used as a hinge band for non-transparent covering of the door crack
 - Hinge profiles for slot dimensions 30 and 40/45/50 can also be combined for maximum flexibility
 - For doors with profile frames or doors made of solid surface elements
 - Fitted on outside or inside
-
- Assembly as removable and non-removable hinges
 - Opening to the right and left
 - Centering slots as a drill guide for mounting bores
 - Required finishing:
 - cut the hinge halves to length
 - drilled holes for fixing


Technical data

Groove		
		N
	8	300
	10	


No.	Material
3842543371	Anodized aluminum
3842543372	
3842544661	Grooved pin: steel; galvanized Washer, cover cap: PA

Dimensions


Hinge profile 30, 40/45/50

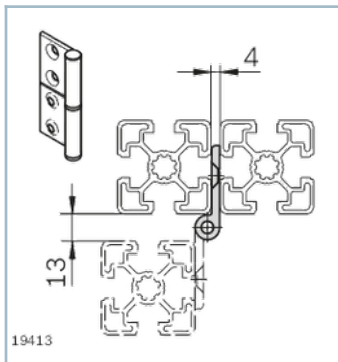


Hinge profile 30, 40/45/50

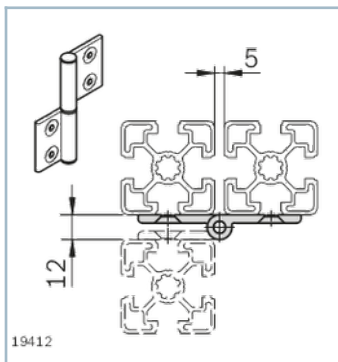


Hinge profile 30

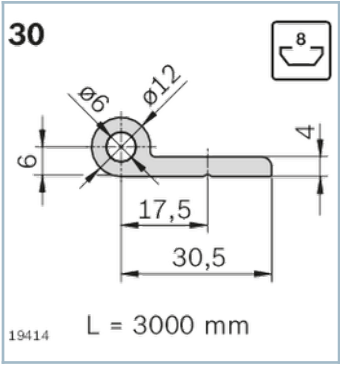

Hinge profile 40/45/50

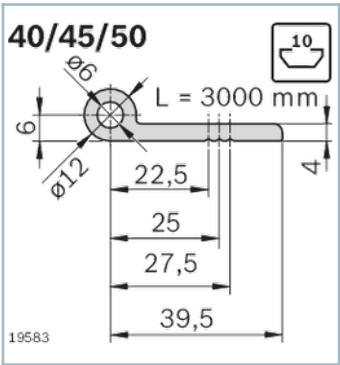

Hinge pins

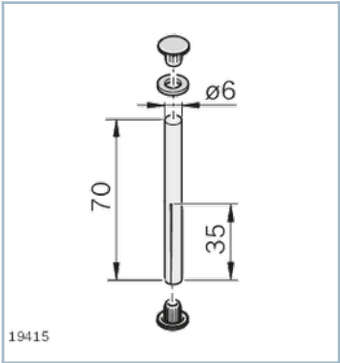

Accessories


Required accessories

Hinge pins

M6 T-nut

Screw ISO 10642 M6x12 (8 mm slot)

Screw ISO 10642 M6x12 (10 mm slot)

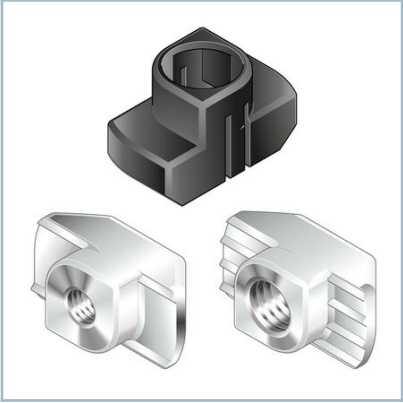

T-nut

- Standard element for secure, conductive connections
- Stop for correct positioning in the profile slot
- Stainless steel T-nut, e.g. for outdoor or cleanroom applications

Delivery notes

Scope of delivery

Hinge profile 30	
Hinge profile 40/45/50	
Hinge pins	Incl. grooved pin, 2 x cover cap, washer

Ordering codes

	Groove	L		ESD	No.
		mm			
Hinge profile 30	8	3000	10		3842543371
Hinge profile 40/45/50	10	3000	10		3842543372
Hinge pins			10		3842544661