
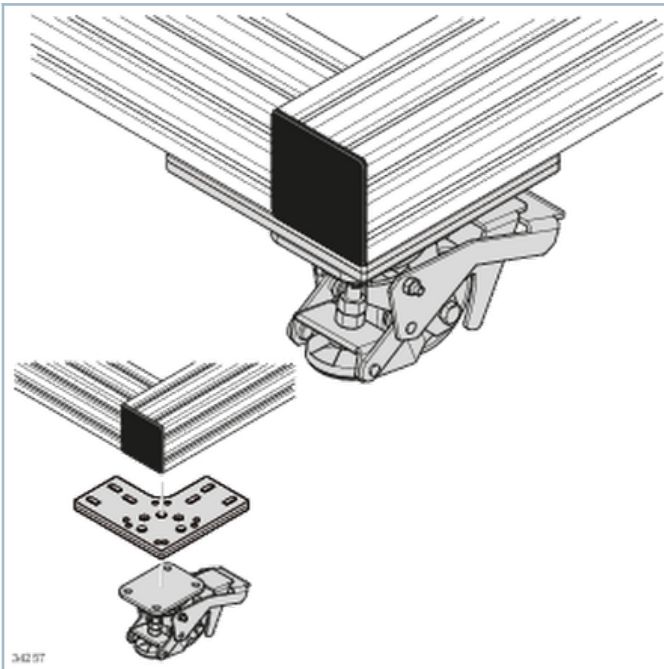


Lifting wheel - Rotatable Pedal



- Steerable lifting wheel
- The wheel turns into a stable base simply by engaging the stop lever
- The locking lever moves with the wheel
- The locking lever can be moved under the frame if necessary

Accessories

Required accessories

Screw M8x20 (ISO 4762), washer A8 (DIN EN ISO 7089), locking washer 8 FSt for attaching to the screw-on plate

Screw-on plate, lifting wheel

Flange head screw similar to ISO 7380-2 10.9 M8x25, however, Torx 40 (tightening torque 25 Nm), T-nut 10 M8, central bolt M12 or S12 for fastening the screw-on plate at the profile frame

Ordering codes

	F		No.
	N		
Lifting wheel - Rotatable Pedal	2000		3842555610
Screw-on plate, lifting wheel		4	3842553967