


Drive Module AS 2/C-400




- Drive for conveyor unit self-assembly
- Conveyor medium: Flat top chain (where KA = A suitable for use in an EPA)

- Motor mounting on right, left or centrally (centrally on track widths of 240 mm and above)
- Motor connection: optionally with cable/plug or terminal box motor connection
- Special models on request
- Reversible operation not permitted
- Use with medium accumulation loads
- We strongly advise using the LU 2 automatic lubrication unit

Product description

The AS 2/C-... drive module drives the conveyor medium flat top chain in self-built conveyor units with section, return unit and flat top chain.

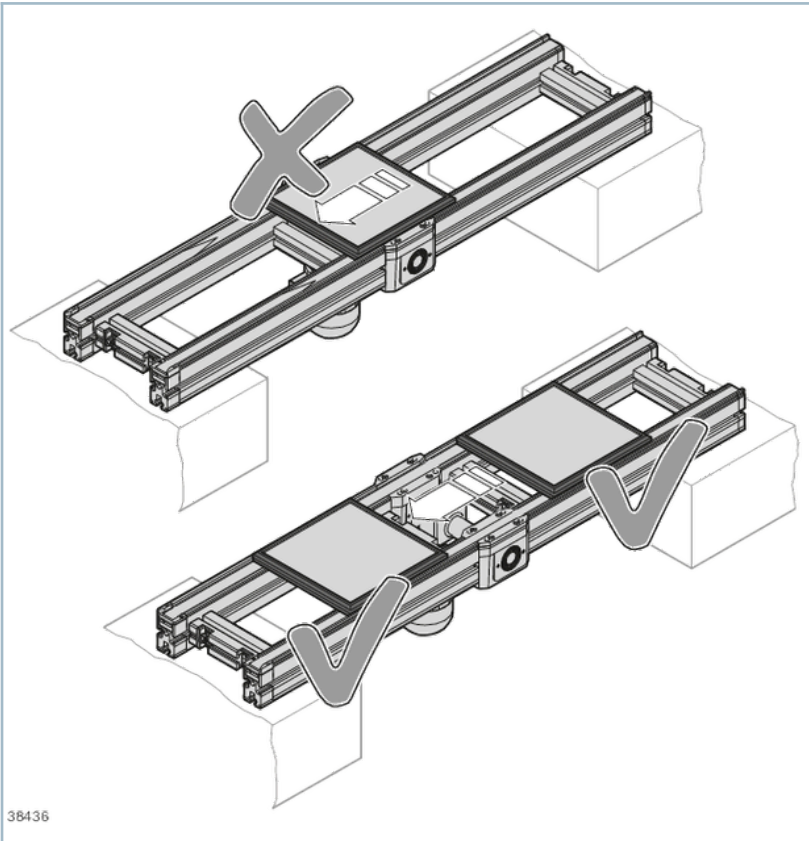

It is not permitted to stop the workpiece pallet in the drive head and return head areas.

Energy efficiency – Rexroth 4EE

Technical data


No.			3842998038
Max. section load in accumulation operation		kg	400
ESD ¹⁾			yes
Cleanroom class			ISO class 7
Dry room	r.F.	%	< 1
Required conveyor media length ²⁾	l_{AS}	mm	625

1) Chain is suitable for use in an EPA (KA = A)

2) Formula for calculating the conveyor medium, see table

Transport and nominal speed v_N

Dimensions

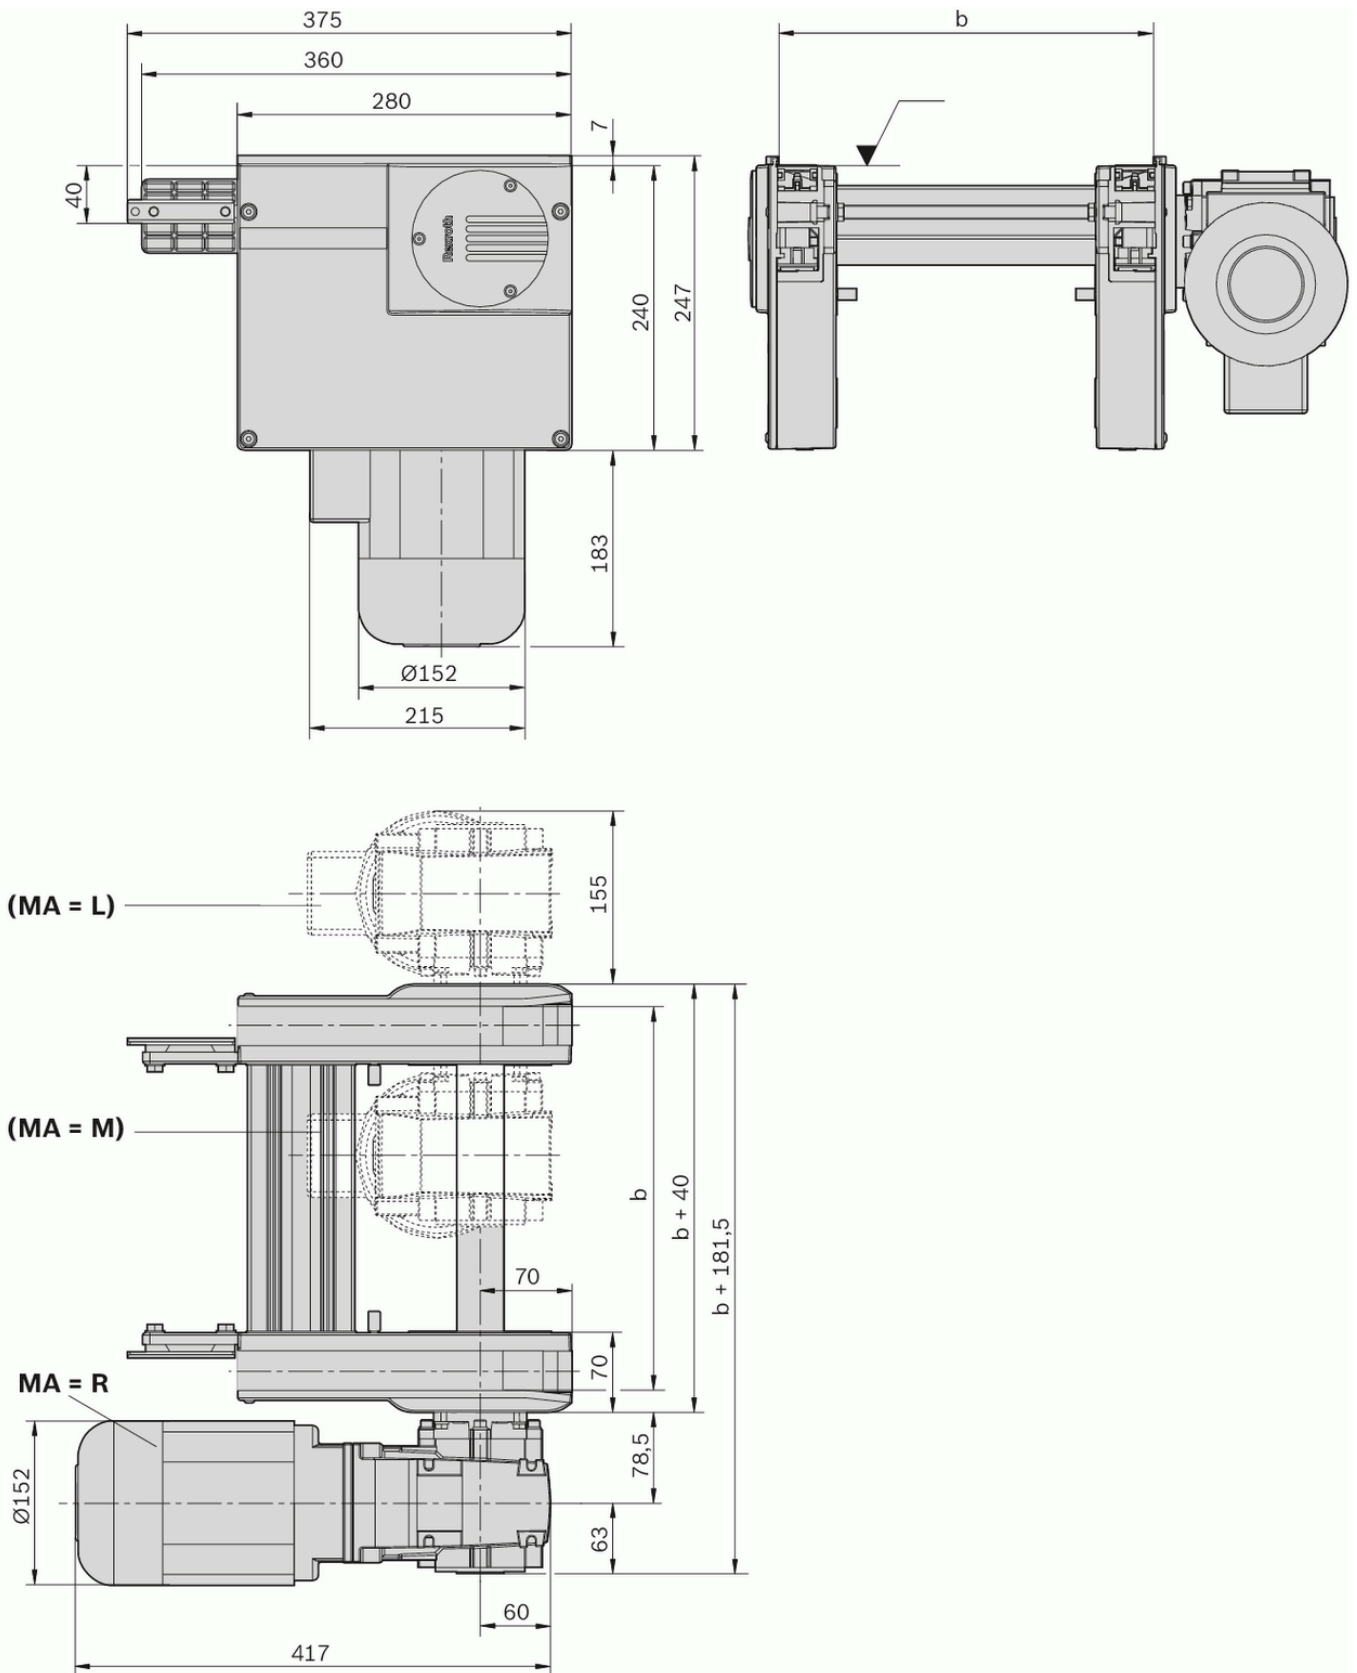

37162

Accessories

Recommended accessories

Connection Kits

LU 2 Automatic Lubrication Unit

Delivery notes


Scope of delivery

Incl. all fastening material to mount on ST 2/... conveyor section

Condition of Delivery

Fully assembled

Ordering codes

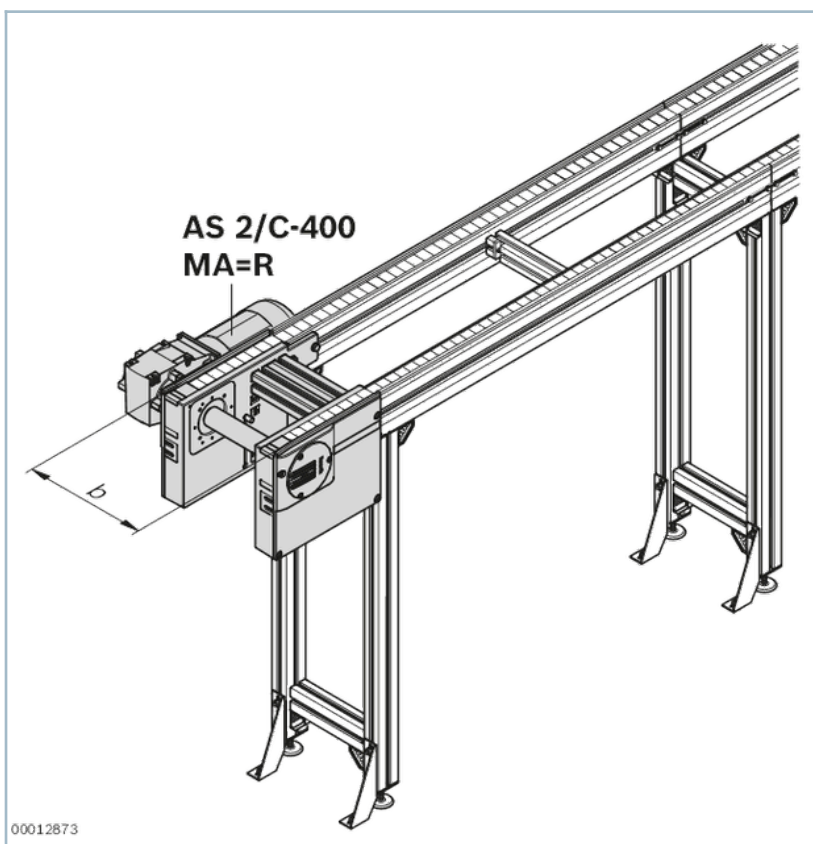

No.		3842998038
b (mm)	Track width in the direction of transport	160; 240; 320; 400; 480; 640; 800; 1040; 1200 160 ... 1200 ¹⁾
v _N (m/min) ²⁾	Nominal speed	0; 6; 9; 12; 15; 18
U, f (V, Hz)	Voltage, frequency	see motor data
AT	Motor connection S: cable/plug K: terminal box	S; K
MA ³⁾	Motor mounting R: right L: left M: center	R; L; M

- 1) Individual width variants can be ordered
- 2) v_N = 0: without motor or gear
- 3) MA = M where b ≥ 240 mm only

	No.
Drive Module AS 2/C-400	3842998038