


Joint 60x45




- For movable or rigid profile connections at any angle
- Swivel range 182°
- With marking in 15° increments
- Locking by clamping (5 Nm) or fixing with pins (15 Nm)
- The joint can be adjusted using a clamping lever.

Product description

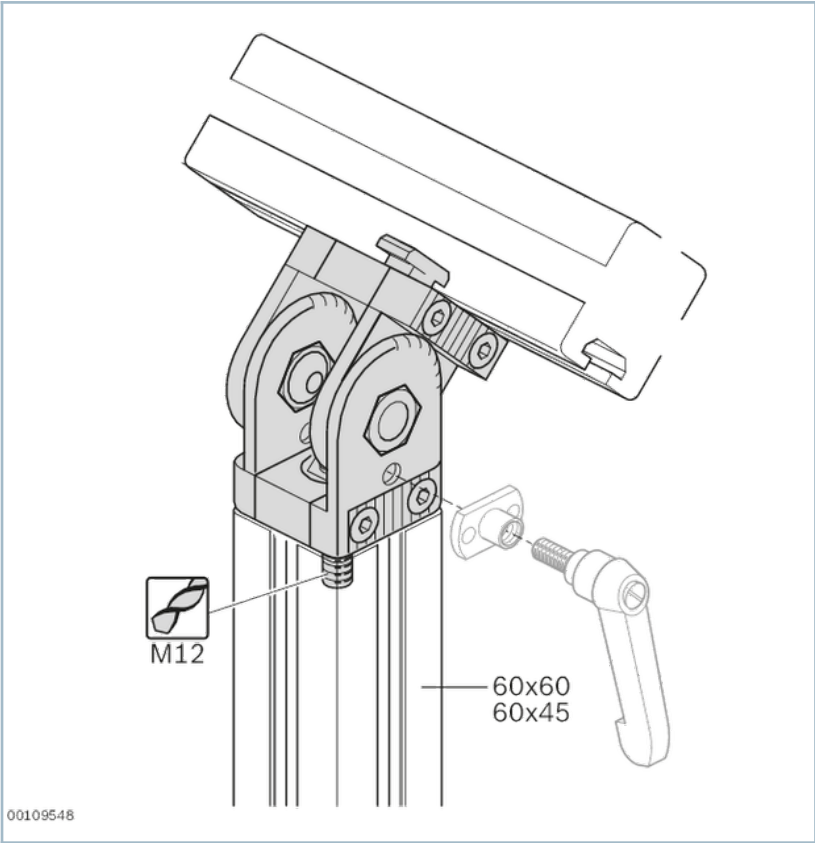


Technical data

	F1 (N)	F2 (N)
	15000	1000

Dimensions

Joint 60x45

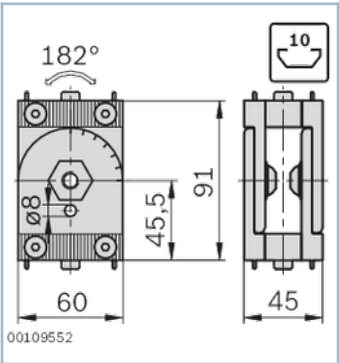



Delivery notes

FS5	FS6
 DIN 7984 M12x40 DIN 125 A8,4	 DIN 7984 M8x20 10

Ordering codes

	Groove	L	ESD	FS	No.
		mm			
Joint 60x45 standard	10			2xFS5, 2xFS6	3842502688
Joint 60x45 <i>designLINE</i>	10			2xFS5, 2xFS6	3842539799
Clamping lever for joint 60x45 60x60		10			3842505144