
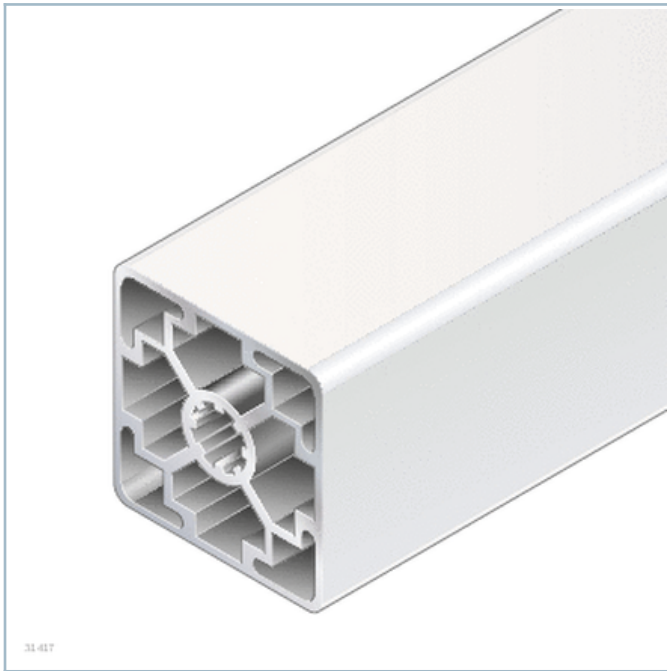


Strut profile 45x45L 0N



Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data


[Quick & Easy profile finishes](#)

Dimensions

Strut profile 45x45L 0N

45x45L 0N


$A = 6,7 \text{ cm}^2$
 $I_x = 13,5 \text{ cm}^4$
 $I_y = 13,5 \text{ cm}^4$
 $W_x = 6,0 \text{ cm}^3$
 $W_y = 6,0 \text{ cm}^3$
 $I_t = 16,2 \text{ cm}^4$
 $W_t = 6,1 \text{ cm}^3$
 $m = 1,8 \text{ kg/m}$



19422



Cover cap 45x45

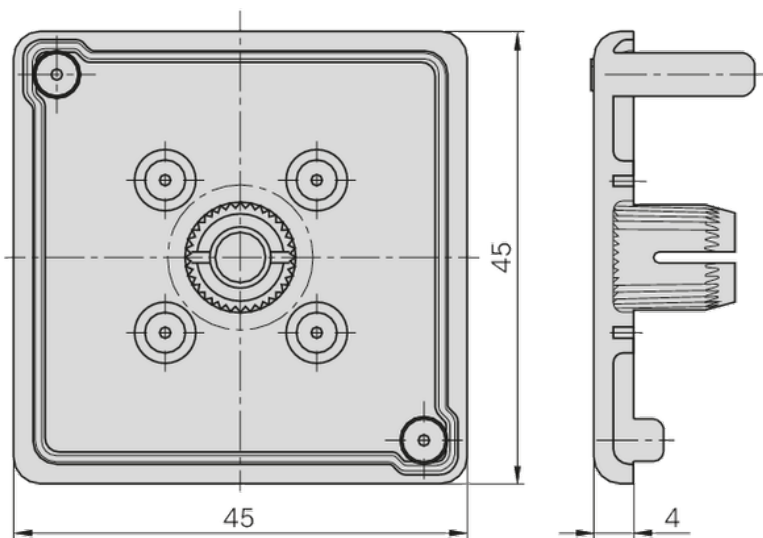

28942

Ordering codes

The following cover caps with hole can be used:

Cover cap with hole 45x45, signal gray (1x)

Cover cap with hole 45x45, black (1x)

The following cover caps can be used:

Cover cap 45x45, signal gray (1x)

Cover cap 45x45, black (1x)

	L			ESD	No.
	mm				
Strut profile 45x45L 0N, 20xL=6070mm	6070	20			3842540955
Strut profile 45x45L 0N Q&E	50 ... 6070		1		3842993761
Cover cap 45x45, signal gray			100		3842548752
Cover cap 45x45, black			20		3842548753
Cover cap with hole 45x45, signal gray			20		3842548796
Cap with hole 45x45, black			20		3842548797

Quick&Easy profile finishes

Standard profile finishing L_{max} = 6000 mm (note minimum length)		M12 / D9.8 / D17 / DB17
Individual profile finishing (L_{max I} = 5400 mm) ¹⁾		DI / DIS / MT / MTS / MI / MIS / DG

1) DG_{max} = 45°; L_{min1} / L_{min2} = 378 / 456 mm