


Strut profile 30x60 4N

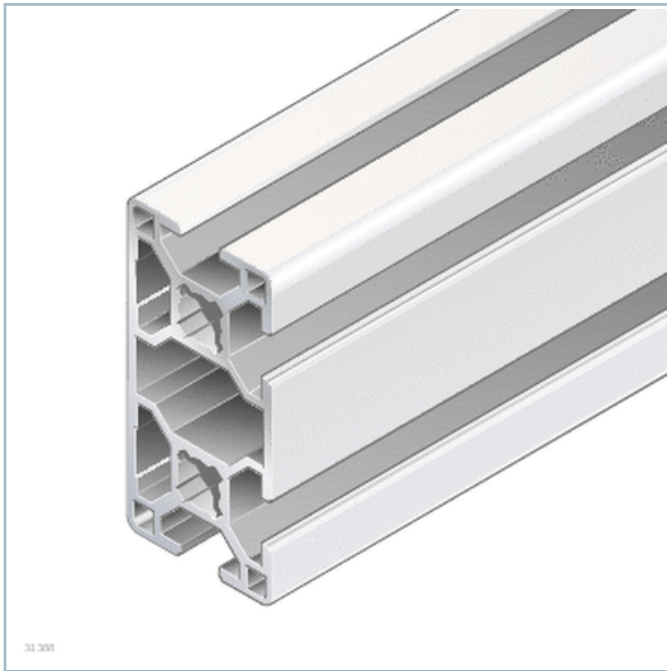

Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data

[Quick & Easy profile finishes](#)


Dimensions

Strut profile 30x60 4N

30x60 4N

$A = 5,8 \text{ cm}^2$
 $I_x = 20,2 \text{ cm}^4$
 $I_y = 5,5 \text{ cm}^4$
 $W_x = 6,7 \text{ cm}^3$
 $W_y = 3,8 \text{ cm}^3$
 $I_t = 4,8 \text{ cm}^4$
 $W_t = 2,4 \text{ cm}^3$
 $m = 1,6 \text{ kg/m}$

19188

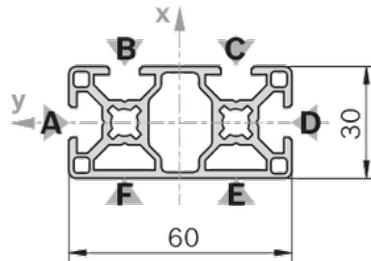

Ordering codes

The following cover caps are needed:

30x30 signal gray (2 item)

30x60 signal gray (1 item)

30x30 black (2 item)

30x60 black (1 item)

The following caps with holes are needed:

30x30 signal gray (2 item)

30x30 black (2 item)

	L			ESD	No.
	mm				
Strut profile 30x60 4N	50 ... 6070		1		3842993420
Strut profile 30x60 4N, 10xL=6070mm	6070	10			3842536472
Strut profile 30x60 4N Q&E	50 ... 6070		1		3842993713
Cover cap 30x30, signal gray			100		3842548744
Cover cap 30x60, signal gray			20		3842548780
Cover cap 30x30, black			20		3842548745
Cover cap 30x60, black			20		3842548781
Cover cap with hole 30x30, signal gray			20		3842548774

	L			ESD	No.
	mm				
Cover cap with hole 30x30, black			20		3842548775
Strut profile 30x60 4N	6070		1		3842536473

Quick&Easy profile finishes

Standard profile finishing Lmax = 6000 mm (note minimum length)	M8 / D7.8 / D11 / DB11
Individual profile finishing (L _{max} = 5400 mm) ¹⁾	DI / DIS / MT / MTS / MI / MIS / DG

1) DG_{max} = 45°; L_{min1} / L_{min2} = 404 / 508 mm