
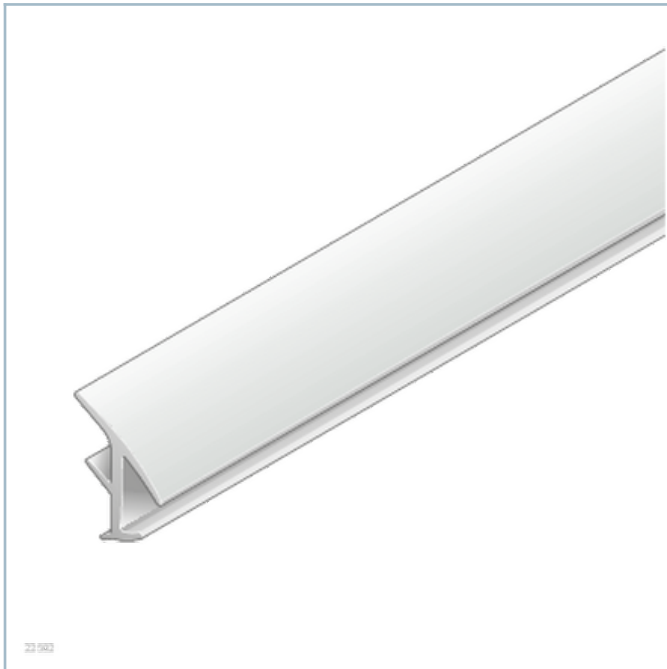



Mounting rim profile, cleanroom




- For the play-free mounting of surface elements in the profile slot
- For surface elements with a thickness of 2–8 mm
- One or both sides of the mounting rim profile used, depending on the thickness of the surface element
- Installation during profile frame assembly
- Suitable for use under clean room conditions


- Tested for emission of volatile organic substances at room temperature, 50 °C and 120 °C, Report No. BO 9903-160

Product description



Mounting rim profile Clean, N10

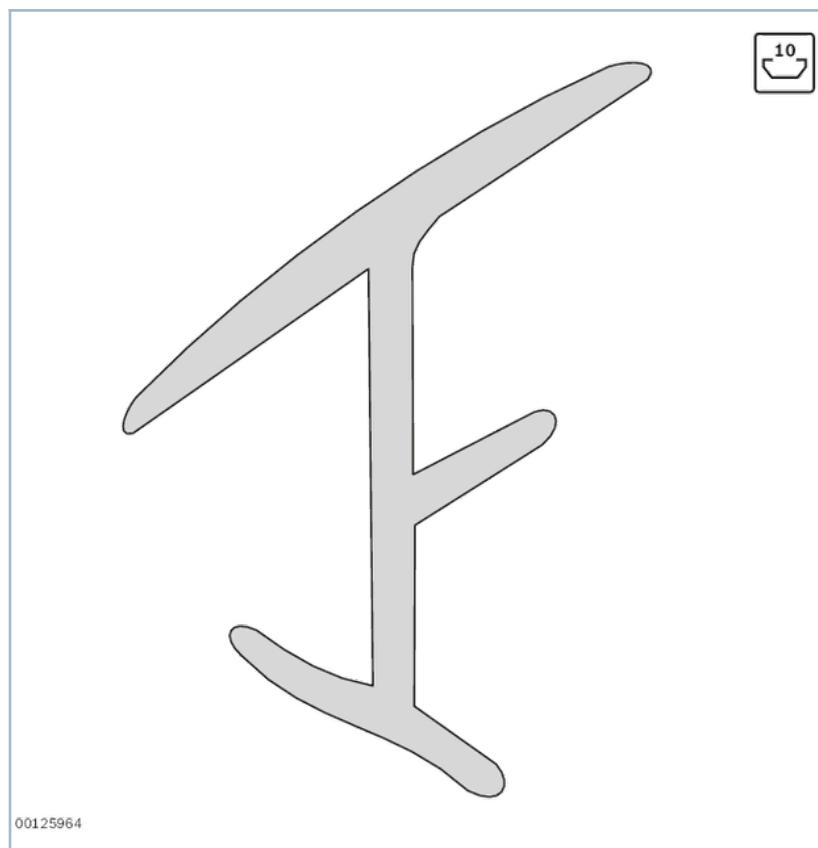

Mounting rim profile Clean, N8

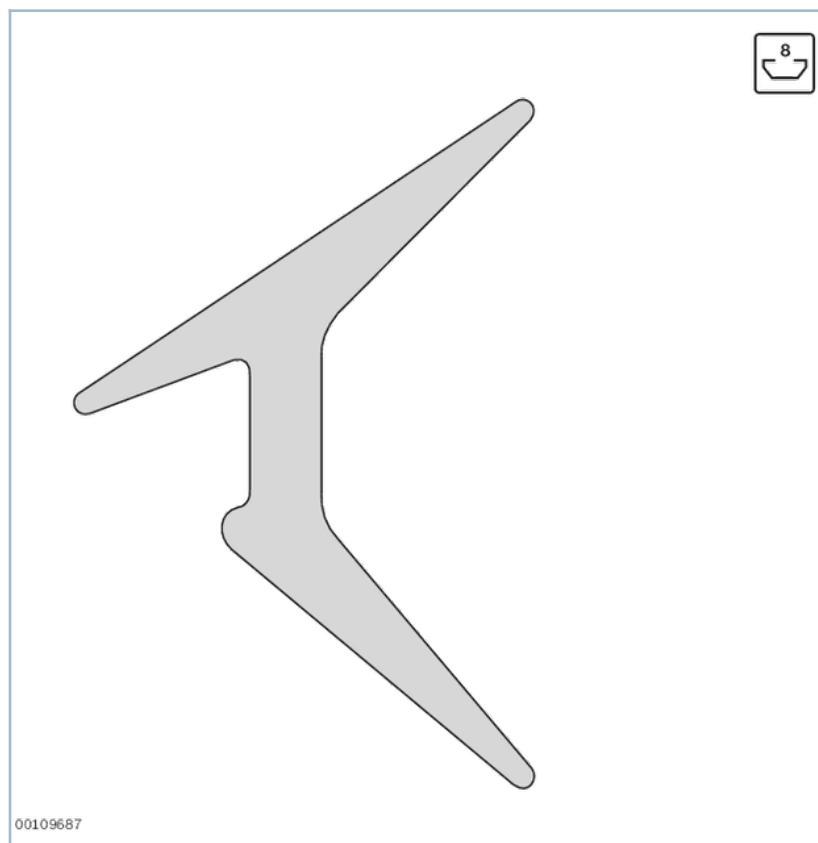

Mounting rim profile Clean, N6

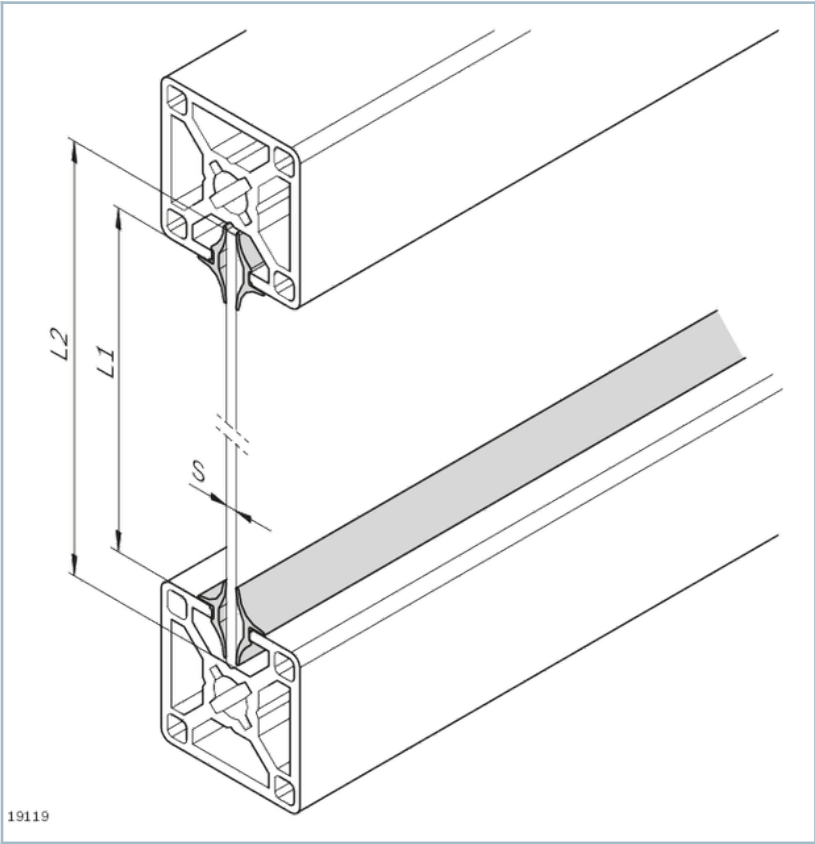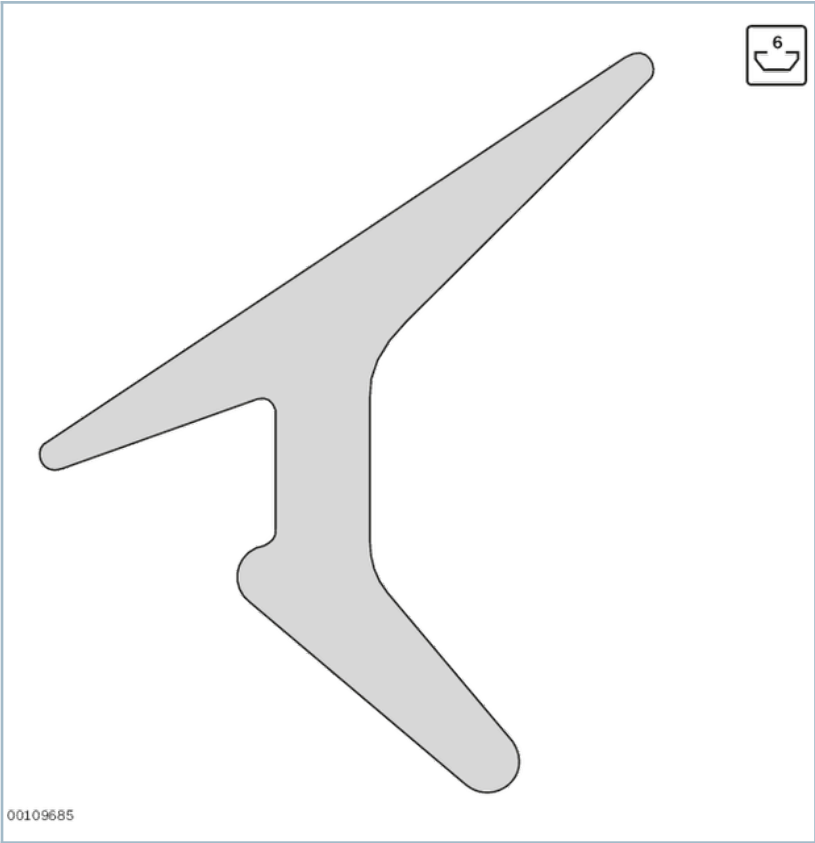


Technical data


No.	Material
3842523493	TPE, light gray RAL 7035
3842523494	
3842555282	TPE; signal gray RAL 7004
3842548949	TPE, light gray RAL 7035
3842555278	TPE; signal gray RAL 7004
3842555280	

Dimensions


Mounting rim profile, clean room , Clean, slot 6

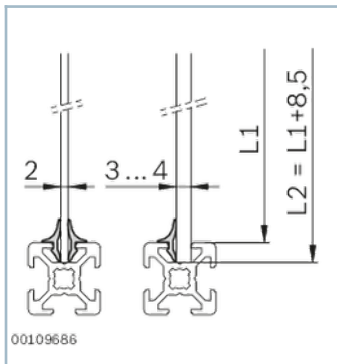

Mounting rim profile, clean room , Clean, slot 8

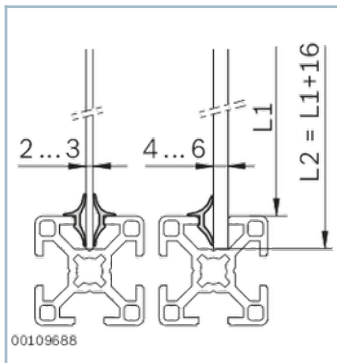

Mounting rim profile, clean room, Clean, slot 10

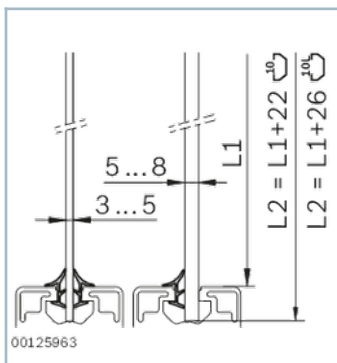

Ordering codes

	Groove	s	L	No.
		mm	mm	
Mounting rim profile Clean, N6	6	2 ... 4	10000	3842523493
Mounting rim profile Clean, N8	8	2 ... 6	10000	3842523494
Mounting rim profile Clean, N10	10	3 ... 8	10000	3842555282
Mounting rim profile Clean, N10	10	3 ... 8	10000	3842548949
Mounting rim profile Clean, N6	6	2 ... 4	10000	3842555278
Mounting rim profile Clean, N8	8	2 ... 6	10000	3842555280