


Section ST 2/C-100



- For conveyor unit self-assembly
- For use in conjunction with all drive modules AS 2/C-... and return units UM 2/C-...
- Conveyor medium: Plastic flat-top chain
- Plastic glide profile GP 2
- Pre-assembled unit for quick setup

Notice: The WT 2/LS can be used for longitudinal conveyors with this component.
It is not possible to cross over.

The section is used to construct conveyor units with plastic flat-top chains in connection with the drive modules AS 2/C-... and return units UM 2/C-...

Recommended accessories

- Leg sets SZ 2/...
- Profile connector
- Cross connector


Scope of delivery

- 2x section profiles SP 2/C with assembled guide profiles FP 2 and glide profiles GP 2

Condition on delivery

- Assembled

Ordering information

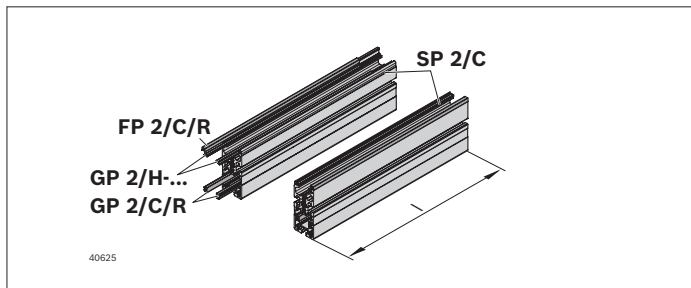

Material number		3842994188
I (mm)	Length	60 ... 6000
GP	Glide profile	0; 1
	0 = plastic	
	1 = steel	

Technical data

Material number			3842994188
Material specification			Glide profile: PA/steel: corrosion-resistant Guide profile: PA Section profile: Aluminum, natural; anodized
Max. operating temperature	T	°C	+40
Length	l	mm	60 ... 6000

Dimensions

