
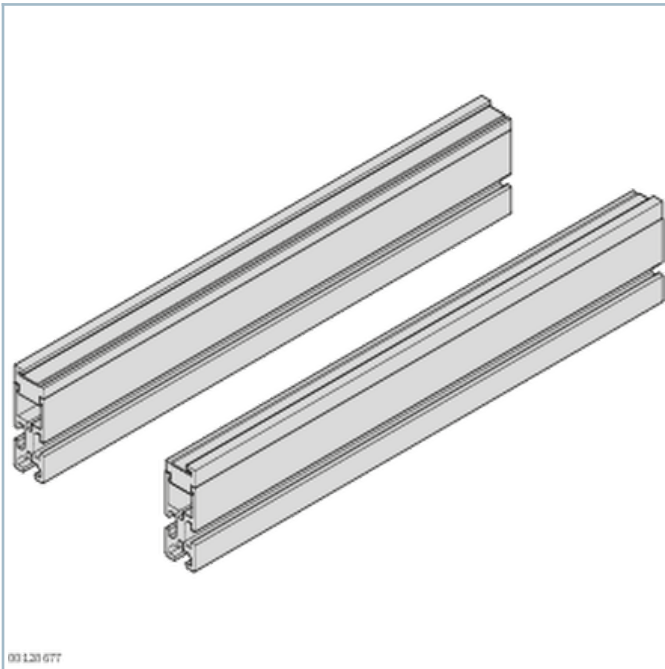


Section ST 1



- Section profile SP 1 as a supporting element
- Guide profile GP 1 for guiding the belt GT 1; can be replaced easily in case of wear.
- Maximum length $L_{\max} = 6000 \text{ mm}$

 [Assembly instructions](#)

Product description


Structure of conveyor units in conjunction with drive module AS 1 and return unit UM 1

Technical data

No.			3842999779
ESD			yes
Cleanroom class			ISO class 7
Material entry			Section profile: aluminum, anodized Guide profile: Plastic PE-UHMW (anti-static)
Length	l	mm	200 ... 6000

Dimensions

Section ST 1

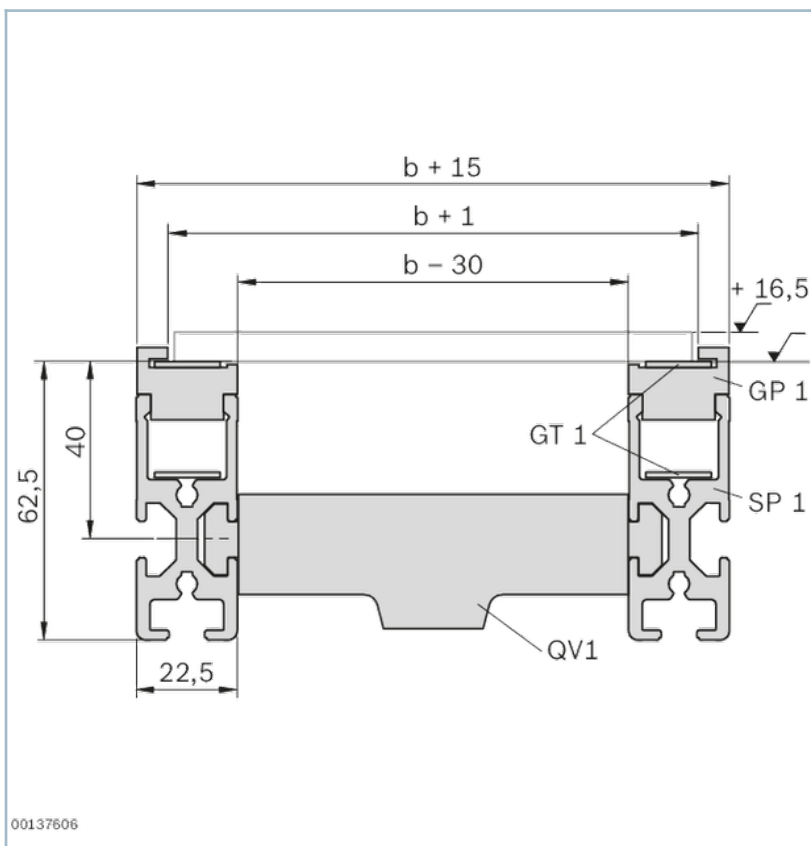


Accessories

Optional accessories:

- Leg sets SZ 1
- Profile connector for the end-to-end connecting of two section profiles SP 1. Required for $l_s > 6000$ mm.


Required accessories:

Cross connector QV 1 for the track width definition

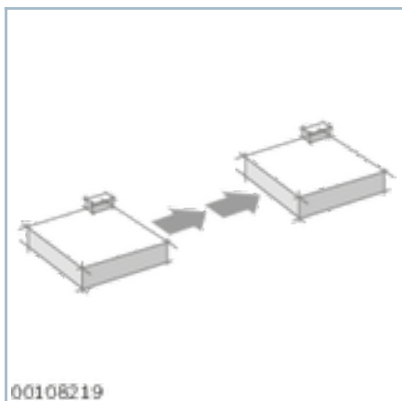

Connectors

- Profile connector
- Cross connector QV 1

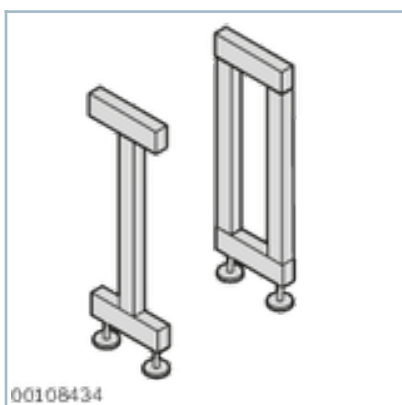

Leg Sets

[PDF](#) Assembly instructions

- Extruded aluminum profile
- Height-adjustable bases
- Suitable for conveyor sections and belt sections

Delivery notes

Condition on delivery:


Not assembled

Scope of delivery:

- 2x section profile SP 1
- 2x guide profile GP 1

Ordering codes

	No.
Section ST 1	3842999779

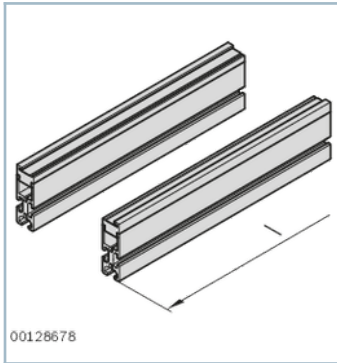

Order Parameter

L (mm)	Length	200 ... 6000
--------	--------	--------------