

UM 2/R-V-170 Return Unit




- Conveyor medium: Accumulation roller chain *Vplus* (suitable for use in an EPA)
- For use in conjunction with all AS 2/R-V-... drive modules

- Design with pinion for return unit, recommended for sections of up to $l = 6000$ mm
- Reversible operation possible

Product description

The return unit is used to set up conveyor units. It guides the conveyor medium at the end of the conveyor unit back to the drive module.

Note: On the *Vplus accumulation roller chain*, the workpiece pallet attains a speed up to a factor of 2.5 higher than that of the chain. This means that you must observe special measures for chain speeds > 9 m/min!

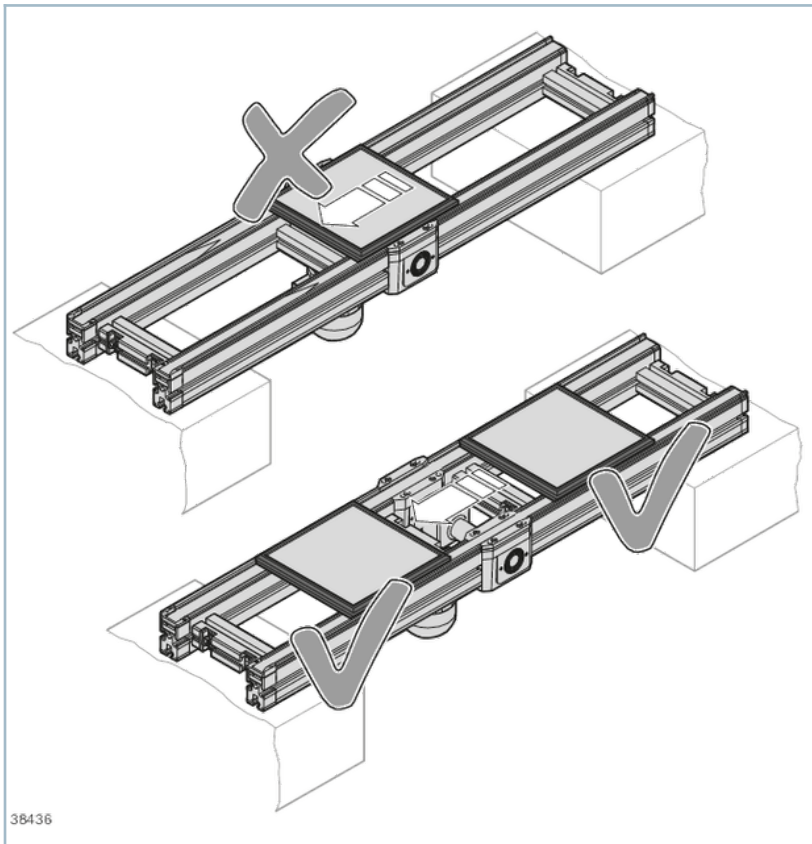


Technical data

No.			3842536803
ESD			yes
Required conveyor media length	l_{UM}	mm	310

Dimensions

UM 2/R... return unit

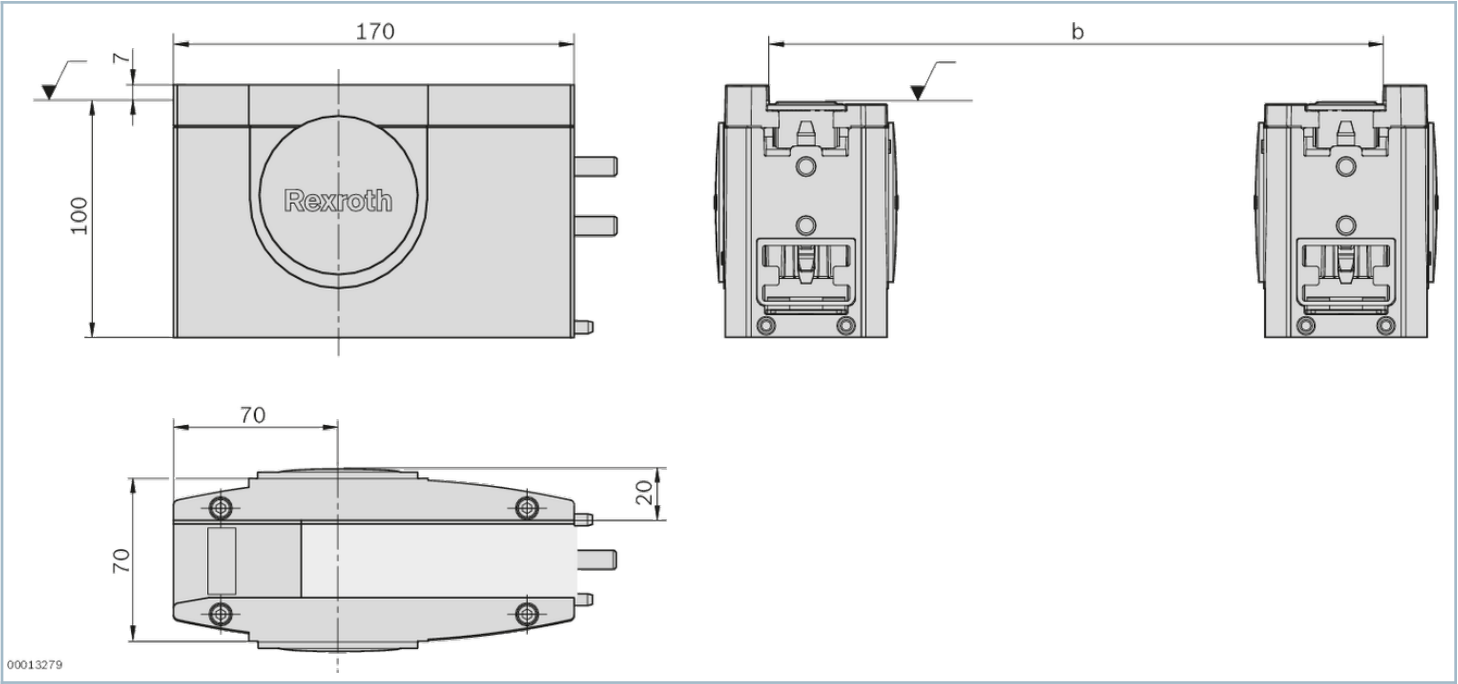

Delivery notes

Condition of Delivery

Fully assembled

Ordering codes

	No.
UM 2/R-V-170 Return Unit	3842536803