

Stop gate VE 5/D-1000-E, VE 5/OCD-1000-E



- Damped stopping of a workpiece pallet at the defined stop surface and for separating workpiece pallets
 - Electrical stop gate for the set-up of plants without pneumatic system
 - Can be combined with WT 5
-
- Little installation work as there is no pneumatic system
 - Low noise development
 - Loading only in the direction of transport
 - No spring return, the stop blade of the stop gate is reset or put up by means of a step motor
 - Hydraulic damping, not adjustable
 - Transportation Control

Product description

Transportation Control

Technical data

No.			3842998924	3842998925
Max. total weight of workpiece pallet	m _G	kg	1000	1000
Workpiece pallet minimum weight	m	kg	50	50
Operating temperature	T	°C	+5 ... +60	+5 ... +60
ESD			yes	yes
Material specification			Housing: Aluminum, hard anodized Stop: Steel, hardened	Housing: Aluminum, hard anodized Stop: Steel, hardened
Zykluszeit		s	5	5

Zulässige Anschlagkraft pro WT

m _{WT}	vN ¹⁾
(kg)	(m/min)
50 ... 1000	6 ... 9
50 ... 900	12
50 ... 800	15
50 ... 700	18

1) Conveyance speed

Dimensions



Information

Notice:

Cannot be combined with ST 5/H-FR, AS 5/H-FR, ST 5/XH-FR and AS 5/XH-FR.

Accessories

Required accessories

Actuator and sensor system cables common in the market (5-pole)

Delivery notes

Scope of delivery


Incl. fastening material for assembly on conveyor section

Electric push-in connection, 5-pole

Condition of Delivery

Not assembled

Ordering codes

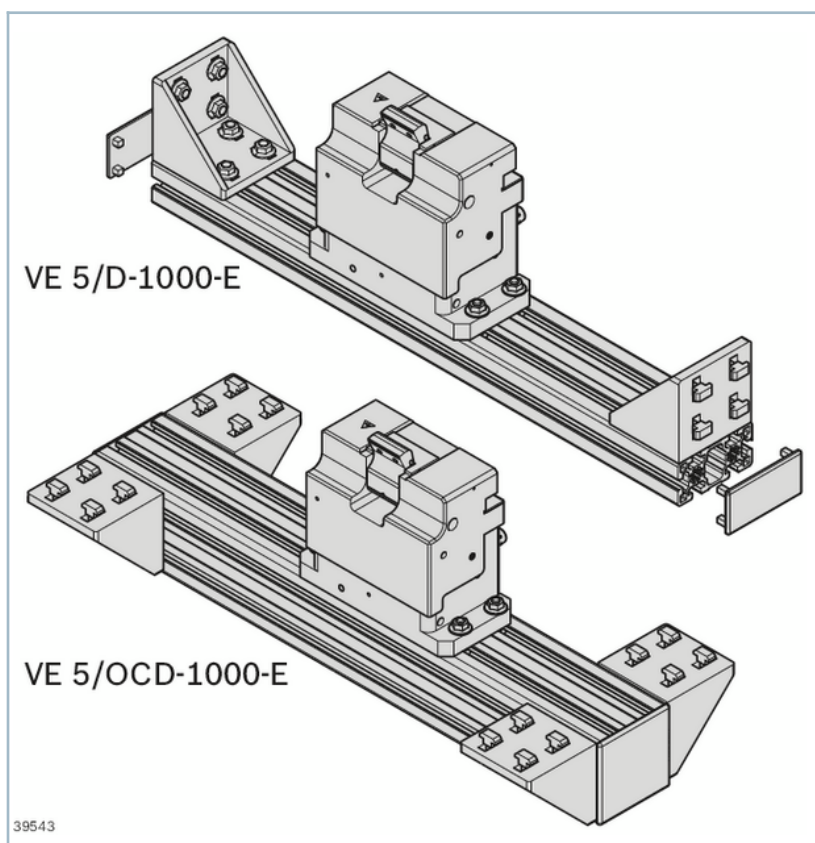

Order Parameter

		Stop gate VE 5/D-1000-E	Stop gate VE 5/OCD-1000-E
b	Track width in direction of transport	455; 650; 845; 1040	400 ... 1500
A _O	Installation location		1; 2; 3; 4 ¹⁾

- 1) 1 = ST 5/OC; AS 5/OC; PE 5/OC; PE 5/OC-T
2 = PE 5/OC & PE 5/OC-T (455x455)
3 = PE 5/OC(b=455, l_{WT}=650)
4 = PE 5/OC-T (bL=455, bQ=650)

	b	No.
	mm	
Stop gate VE 5/D-1000-E	455; 650; 845; 1040	3842998924
Stop gate VE 5/OCD-1000-E	400 ... 1500	3842998925