
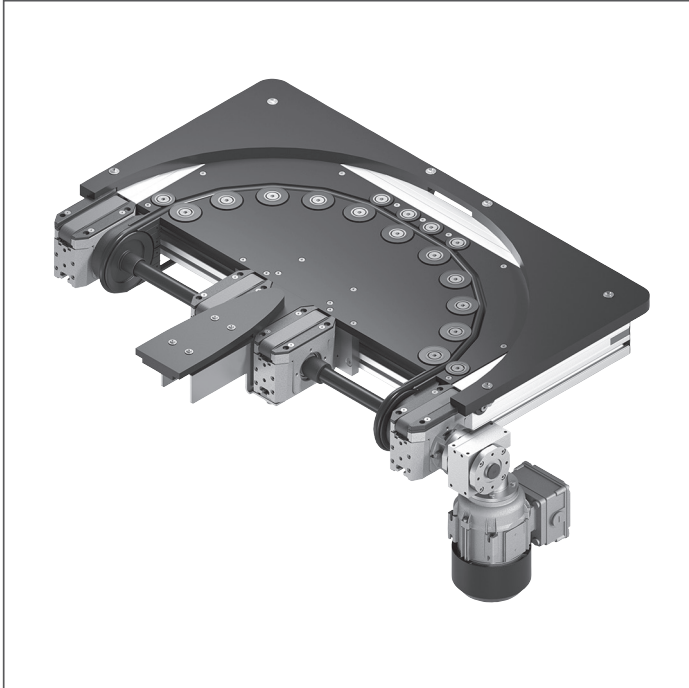


Curve KE 2/180



- ▶ 180° curve conveying of the workpiece pallet
- ▶ Curve module with built-in drive
- ▶ Max. total workpiece pallet weight = 20 kg
- ▶ Conveyor medium: Round belt (suitable for use in an EPA)
- ▶ Intended for grease-free and oil-free environments
- ▶ Can be combined with WT 2 and WT 2/F

Notice: Accumulation operation not permitted.

The curves KE 2/... with round belt conveyor medium have a built-in drive at the curve end. They can be used to combine the longitudinal section with belts or toothed belts.

Required accessories

- ▶ Connection kits
- ▶ Leg sets SZ 2/...


Scope of delivery

Curve, complete with drive motor

Condition on delivery

- ▶ Some assembly required
- ▶ Inner guide and motor included

Ordering information

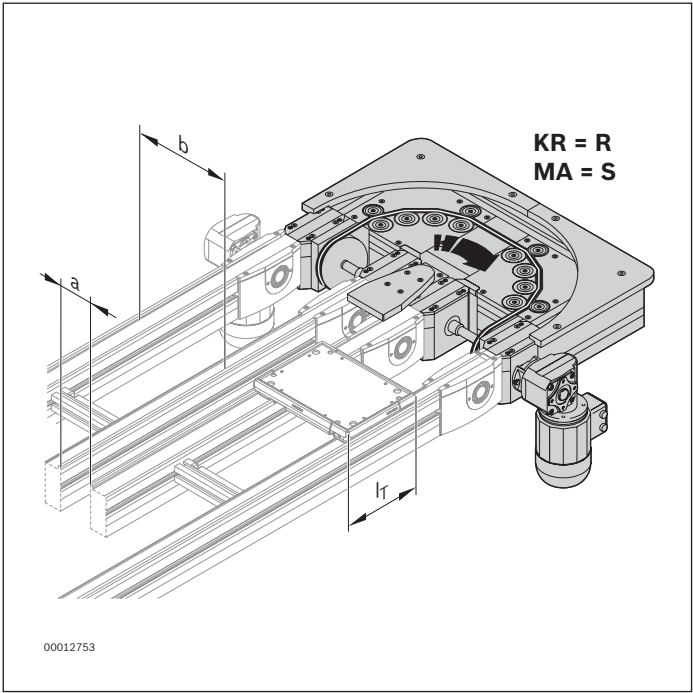

Material number		3842999728
b (mm)	Track width in direction of transport	160; 240; 320; 400
l _T (mm)	Length in direction of transport	160; 240; 320; 400
a (mm)	Distance between conveyors ¹⁾	90; 135
b x l _T (mm x mm)	Combination options	160 x 160; 240 x 160; 240; 320 320 x 240; 320; 400 400 x 320; 400
v _N (m/min)	Nominal speed	0; 6; 9; 12; 15; 18
AT	Motor connection S = cable/plug K = terminal box	S; K
MA	Motor mounting M = center S = on the outside, on the side	M ²⁾ ; S
KR	Curve direction R = right L = left	R; L

¹⁾ b x l_T is possible in all combinations

²⁾ MA = M only when b ≥ 320 mm

Technical data

Material number		3842999728	
Max. total workpiece pallet weight	m _G	kg	20
ESD			Yes

