


Drive head LF12S

- Drive head for transferring drive torque to a toothed belt
- For direct mounting of a motor or (in conjunction with a center shaft) for mounting a hollow shaft gear or a coupling
- Mounted directly on profile by using longitudinal end connector (connector included in scope of delivery)
- Profile finishing: LF blind hole drilling for longitudinal end connector

Dimensions

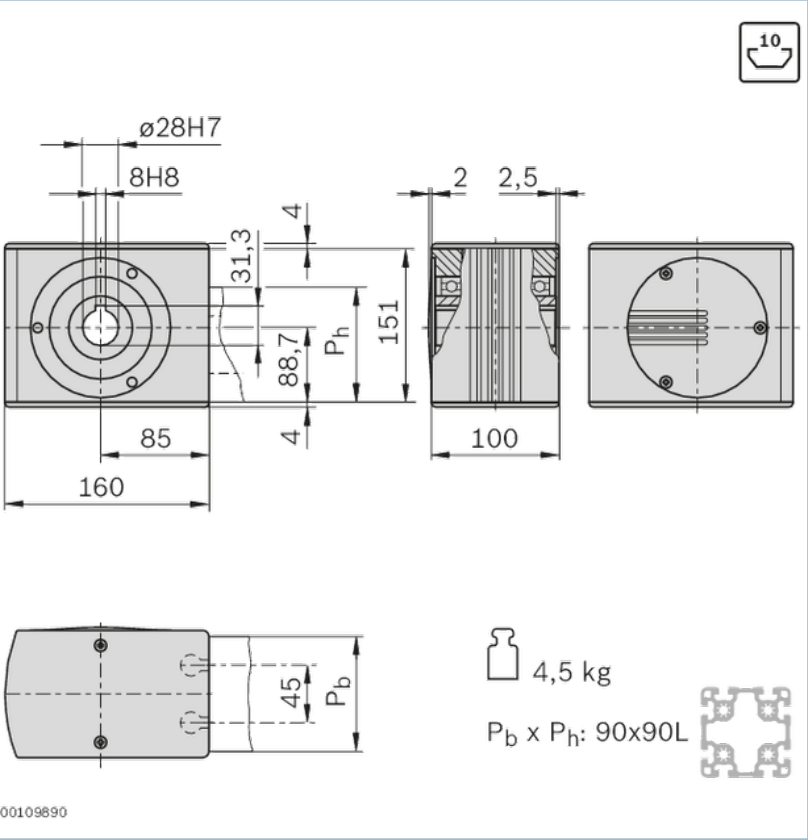

Delivery notes

FS3	FS4
 ISO 7380 M8x40   	 ISO 4035 M8-04  

Ordering codes

	FS	No.
Drive head LF12S	2xFS3, 2xFS4	3842526412