
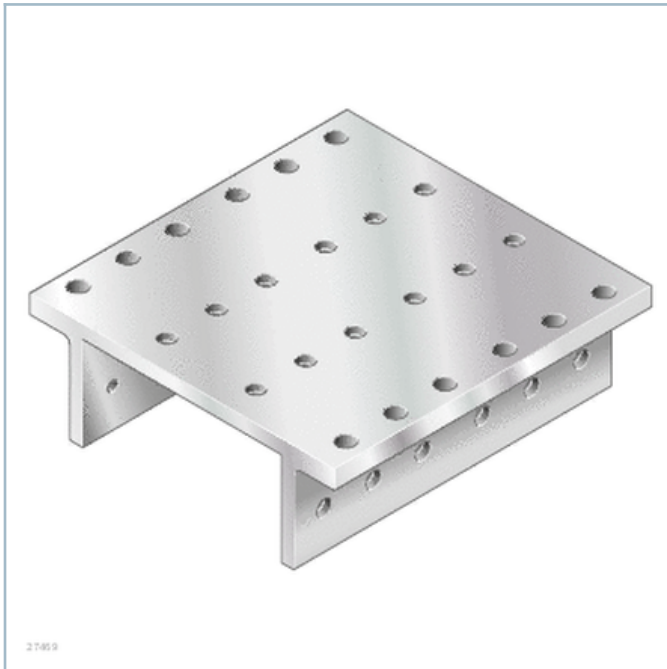


EcoSlide 45x90x160




- Economical linear sliding carriage for horizontal applications
- Runs on sliders for maximal load capacity
- Slider with low moisture absorption, suitable for rough usage conditions
- Available for profile widths of 30/45/60/90
- Clamping lever (optional) for arresting in any position

- Easy to assemble
- Spacer washer for tolerance adjustment (carriage/profile)
- For use with profile width 90 mm
- Maximum sliding speed: 12 m/min


Product description

Machining tip

To install the clamping lever, the corresponding 9 mm hole must be drilled in the trolley.

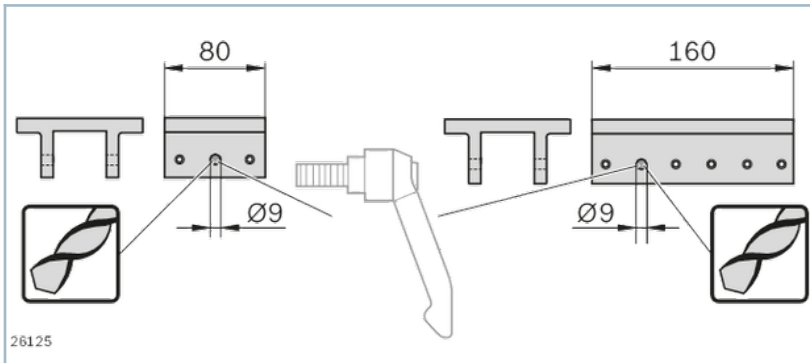


Technical data

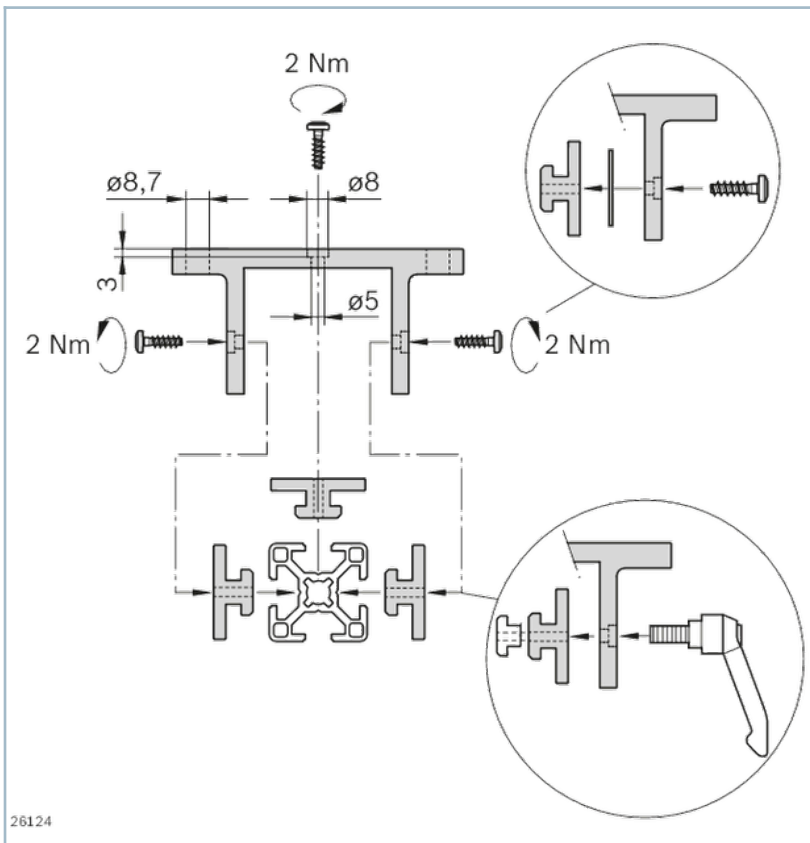


F_{max}	F_{max}	M_{max}	M_{max}
5000 N	2500 N	100 Nm	200 Nm

[illegible]

Accessories

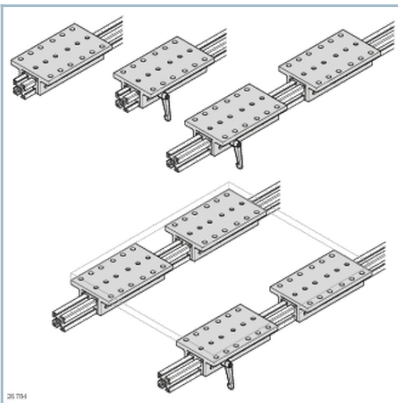

EcoSlide 45x90x160 sliding carriage

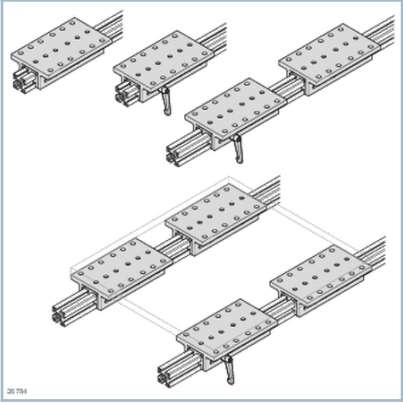

EcoSlide 45x90x160 sliding carriage with clamping holder

Ordering codes

		No.
EcoSlide trolley 45x90x160	1	8981535326