


Drive head LF6S

- Drive head for transferring drive torque to a toothed belt
- For direct mounting of a motor or (in conjunction with a center shaft) for mounting a hollow shaft gear or a coupling
- Mounted with end connector directly on profile 45x60
- Profile finishing: LF blind hole drilling for longitudinal end connector

Dimensions

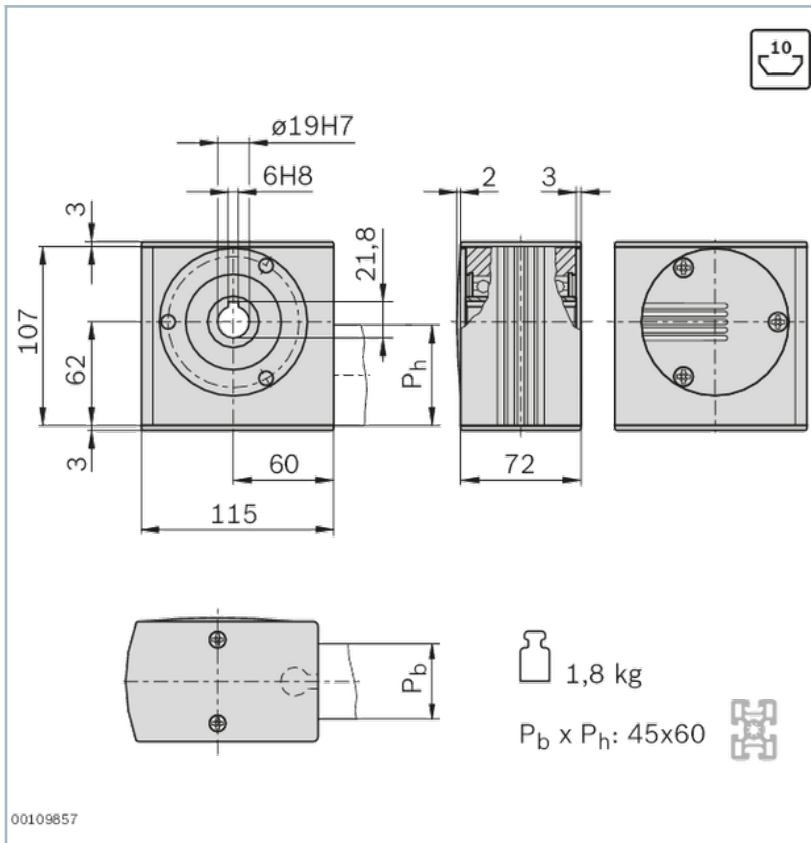

Delivery notes

FS3	FS4
 ISO 7380 M8x40   	 DIN 439 M8  

Ordering codes

	FS	No.
Drive head LF6S	2xFS3, FS4	3842526410