



Profile joint 3/4



- For connecting cable guide profiles or 40x120 or 40x120 5N
- High strength and stability
- Implementation of protected cable branches
- Screw connection with central bolt M12 (recommended) or S12


 [Assembly instructions](#)

Technical data

Material

Diecast aluminum; coated, signal gray RAL 7004

Dimensions

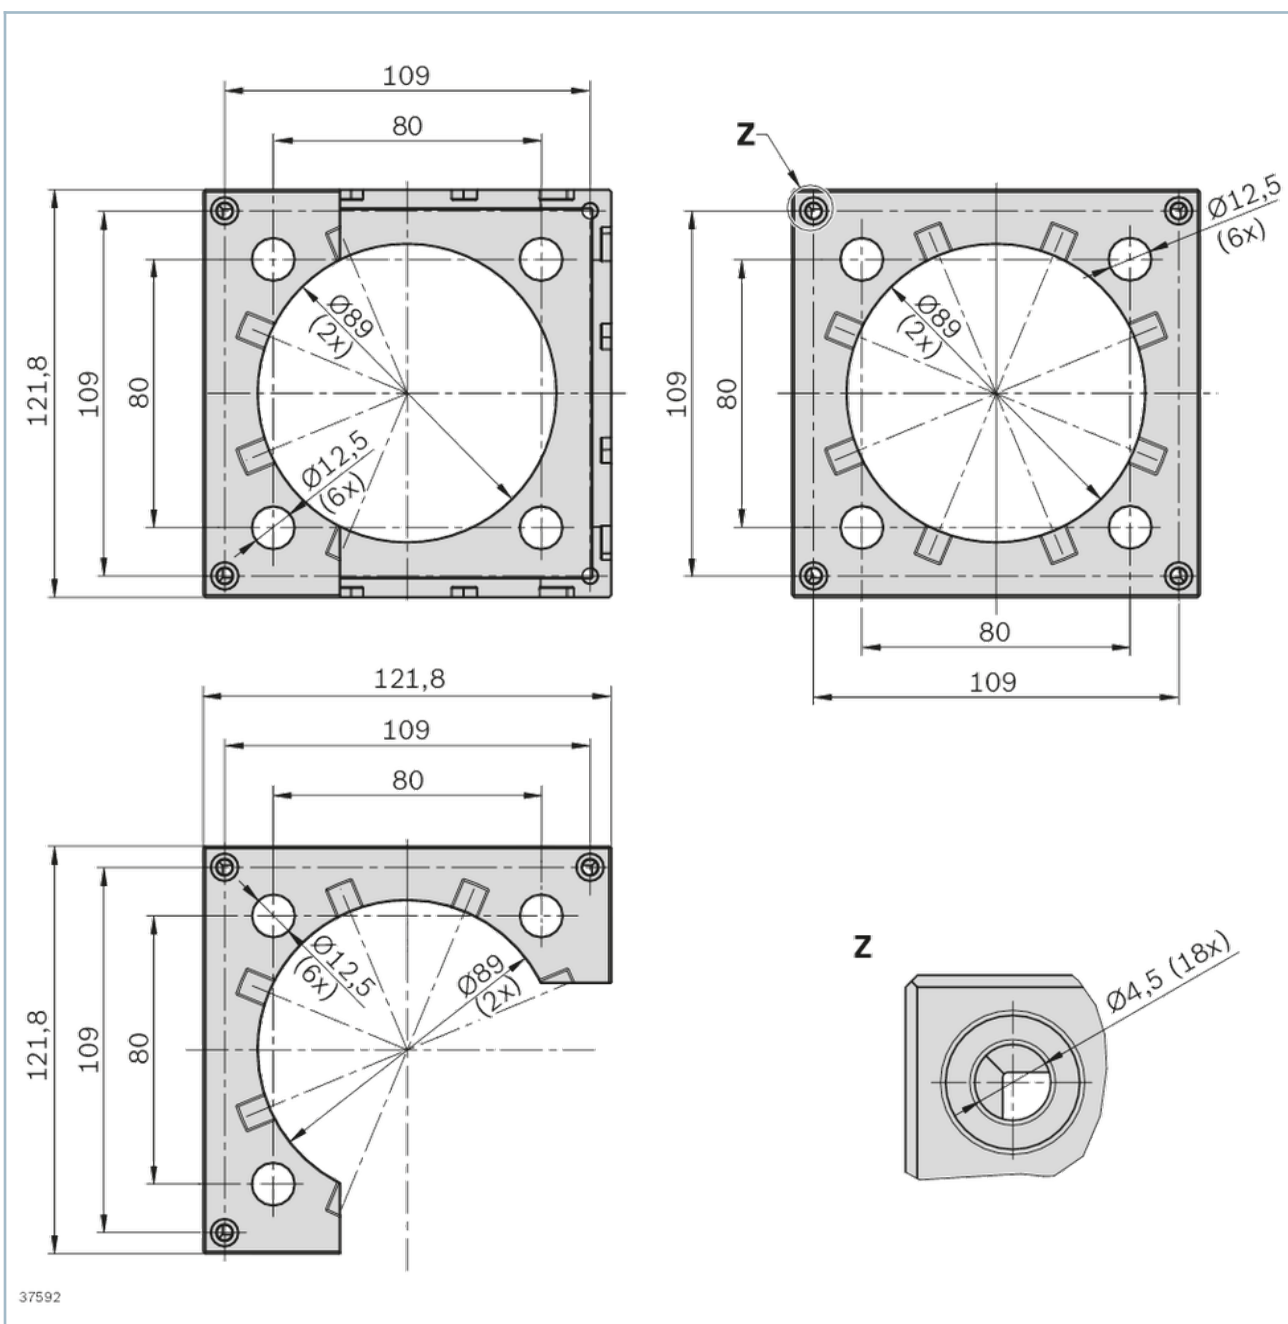

Accessories

Required accessories

Positioning pin to facilitate assembly
Central bolt M12x30-T50 (3 842 530 235)/ S12x30-T50 (3 842 530 236) for fastening the profile joints

Recommended accessories

Edge protector to cover sharp edges
Cover cap for closing openings
Connection bracket for covering sharp edges and for fastening cover caps
Caps

Ordering codes

		ESD	No.
Profile joint 120x120-3/4	1		3842558501

Notice:
A conductive connection between the profiles is established via the fixing screws. However, the surface of the profile joints is not ESD-conductive.