


Strut profile 40x120L 5N



Assembly instructions


Product description

Quick & Easy profile finishes

Introduction to strut profiles

Dimensions

$A = 15,84 \text{ cm}^2$
 $I_x = 30,06 \text{ cm}^4$
 $I_y = 212,4 \text{ cm}^4$
 $W_x = 14,49 \text{ cm}^3$
 $W_y = 35,28 \text{ cm}^3$
 $m = 4,28 \text{ kg/m}$

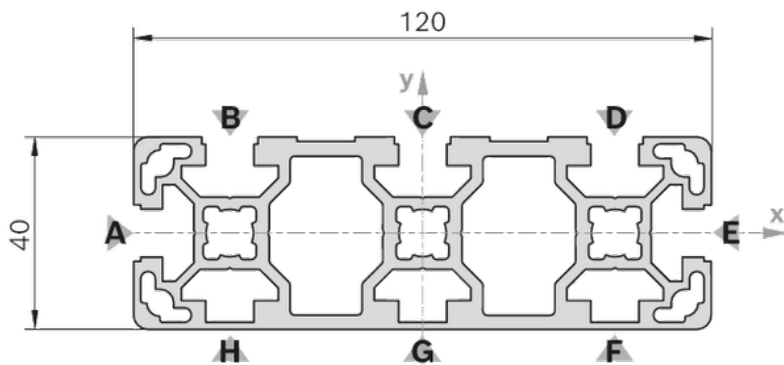

37612

Ordering codes

	L			ESD	No.
	mm				
Cover cap 40x40, signal gray			100		3842548746
Cover cap 40x40, black			20		3842548747
Cover cap 40x80, signal gray			20		3842548748
Cover cap 40x80, black			20		3842548749
Strut profile 40x120L 5N -/-, 10xL=6070	6070	10			3842558480
Strut profile 40x120L 5N Q&E	50 ... 6070				3842993771
Strut profile 40x120L 5N -/-	50 ... 6070	1			3842996363

Quick&Easy profile finishes

Standard profile finishing $L_{\max} = 6000$ mm (note minimum length) ¹⁾	M12 / D9.8 (B,C,D,F,G,H) ¹⁾ / D17 (B,C,D,F,G,H) ¹⁾ / DB17 / F1 (A,E) ¹⁾
Individual profile finishing ($L_{\max I} = 5400$ mm) ²⁾	DI / DIS / MT / MTS / MI / MIS / DG ²⁾

1) For the specified slots

2) $DG_{\max} = 45^\circ$; $L_{\min 1} / L_{\min 2} = 439 / 578$ mm

Hinweis:

Für das Profil 40x120L benötigen Sie folgende Abdeckkappen-Kombination: 1x 40x40 und 1x 40x80