
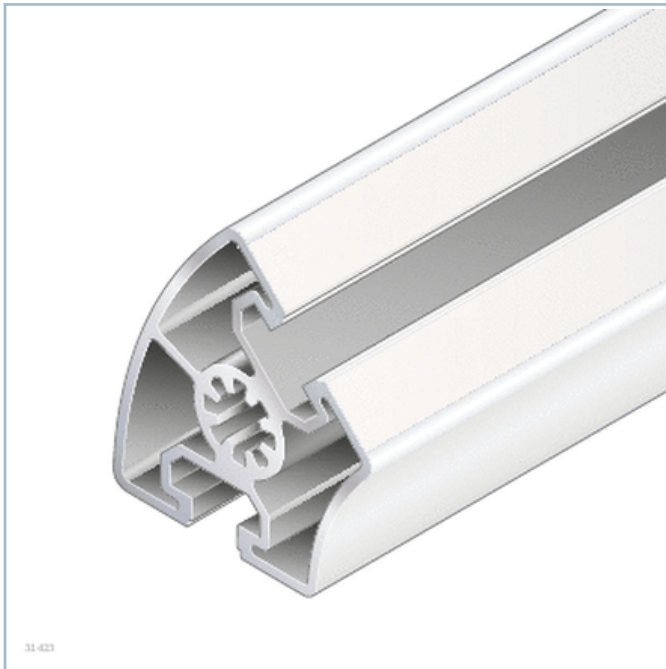


Strut profile 45x45°



31-423

Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data

[Quick & Easy profile finishes](#)


Dimensions

Strut profile 45x45°

45x45°

$A = 7,6 \text{ cm}^2$
 $I_x = 13,4 \text{ cm}^4$
 $I_y = 21,4 \text{ cm}^4$
 $W_x = 5,2 \text{ cm}^3$
 $W_y = 6,4 \text{ cm}^3$
 $I_t = 9,0 \text{ cm}^4$
 $W_t = 6,8 \text{ cm}^3$
 $m = 2,0 \text{ kg/m}$

19428



Ordering codes

The following cover caps can be used:

Cover cap 45x45°, signal gray (1x)

Cover cap 45x45°, black (1x)

	L			ESD	No.
	mm				
Strut profile 45x45°	50 ... 6070		1		3842993014
Strut profile 45x45° 20xL=6070mm	6070	20			3842557955
Strut profile 45x45° Q&E	50 ... 6070		1		3842993735
Cover cap 45x45°, black ESD			20		3842551023
Cover cap 45x45°, signal gray			20		3842551022
Strut profile 45x45°	6070		1		3842558317

Standard profile finishing Lmax = 6000 mm (note minimum length)		M12
---	--	-----