

Section Profile SP 2/BH



- Used for self-construction of low-profile conveyor units and the conveyor medium belt
- For use in conjunction with all AS 2/B-... drive modules, UM 2/B return units and FP 2/B guide profiles

- Longitudinal grooves for easy mounting
- In tough design

Technical data


No.			3842532696	3842990409
Moment of inertia	I_x	cm ⁴	53.7	53.7
	I_y	cm ⁴	28.6	28.6
Moment of resistance	W_x	cm ³	14	14
	W_y	cm ³	13.8	13.8
Material entry			Aluminum, natural-colored, anodized	Aluminum, natural-colored, anodized
Mass	m	kg	3.3	3.3
Length	l	mm	6070	60 ... 6000

Dimensions

Section Profile SP 2/BH

SP 2/BH

$A = 12,4 \text{ cm}^2$
 $I_x = 53,7 \text{ cm}^4$
 $I_y = 28,6 \text{ cm}^4$
 $W_x = 14,0 \text{ cm}^3$
 $W_y = 13,8 \text{ cm}^3$
 $m = 3,3 \text{ kg/m}$

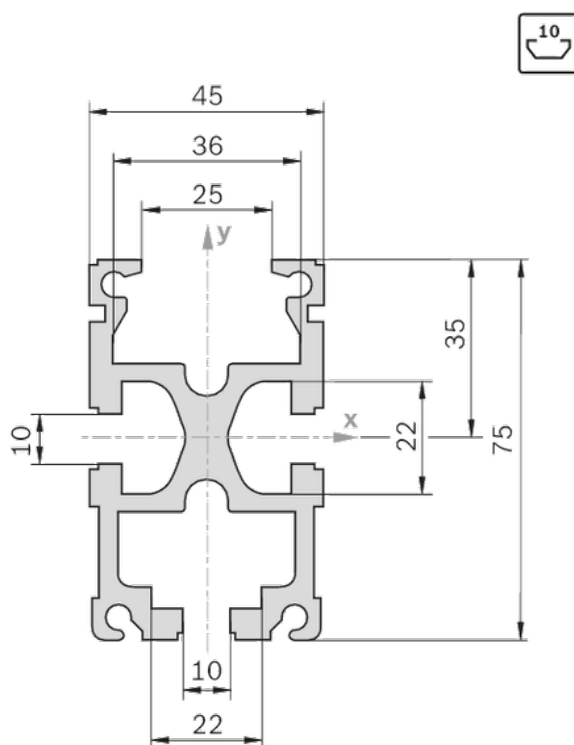

32745

Ordering codes

	L		No.
	mm		
Section profile SP 2/BH, L6070	6070	16	3842532696
Section Profile SP 2/BH	60 ... 6000		3842990409